
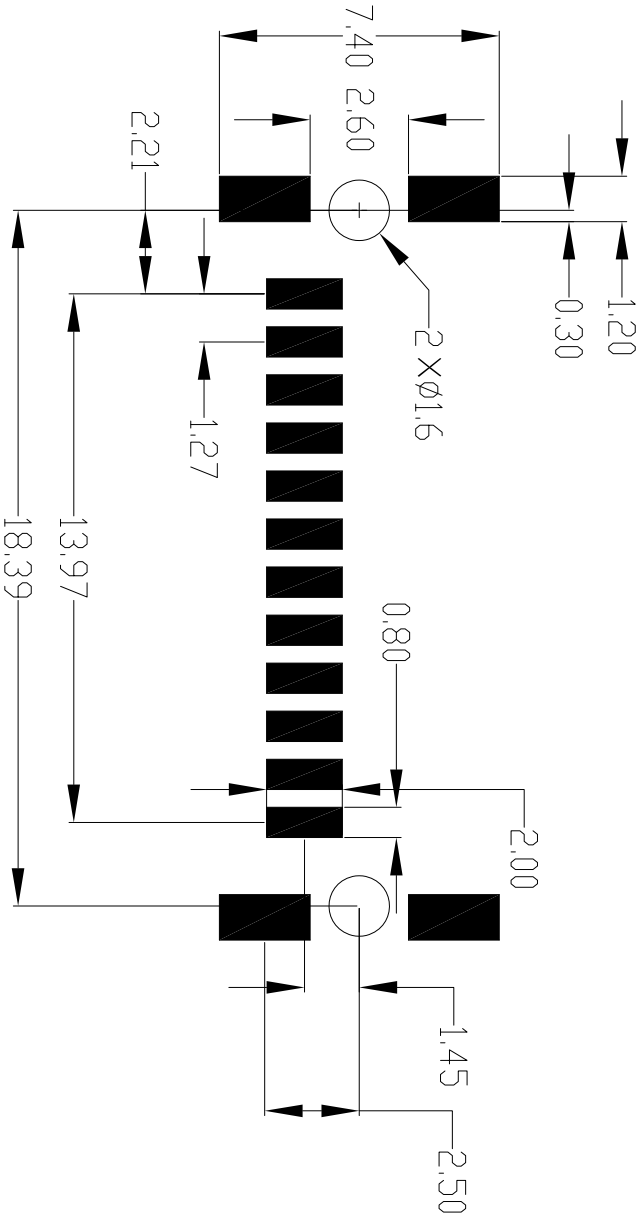
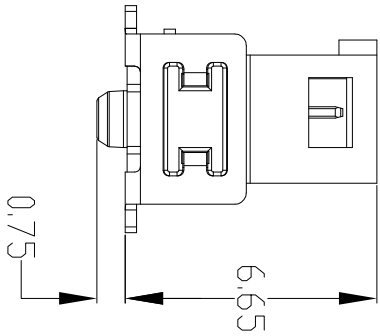





GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

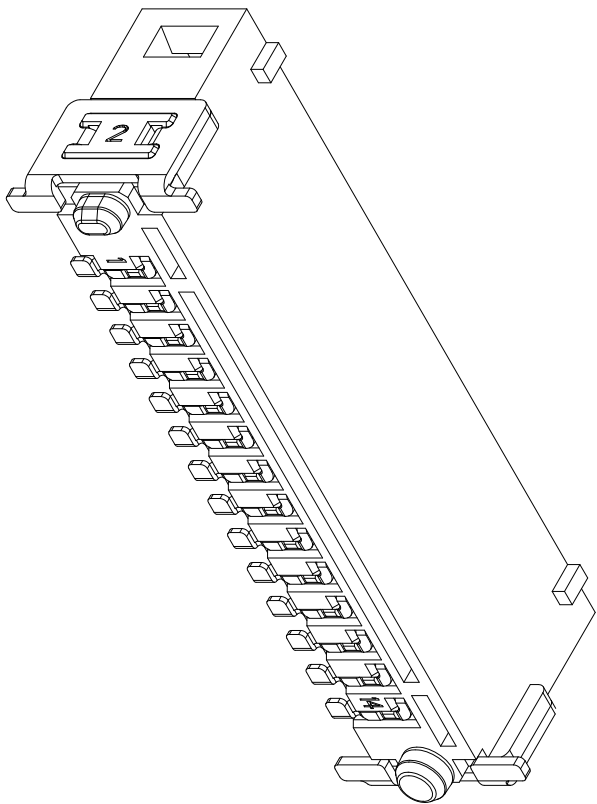

RECOMMENDED PCB-LAYOUT

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

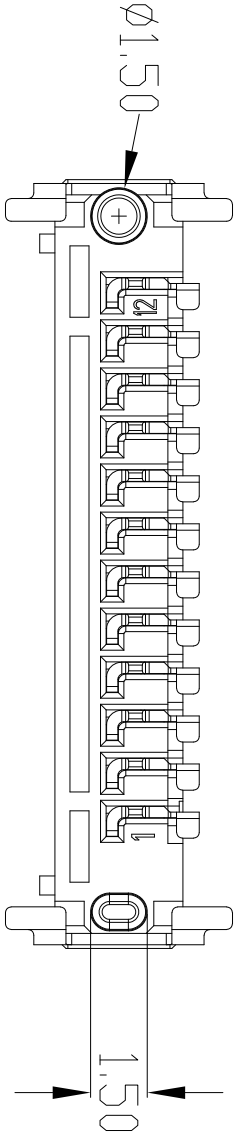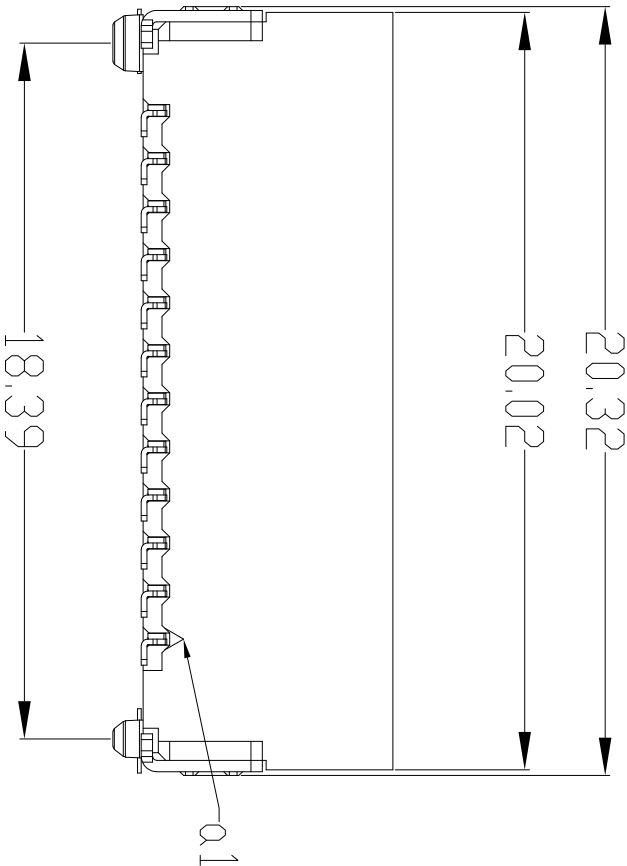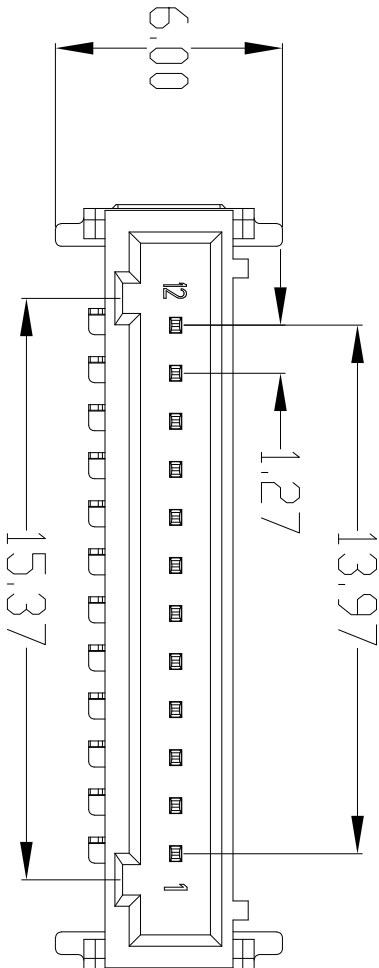

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE		
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC.		APPROVALS		上海良速电子有限公司 Powerlite 1.27mm Single Row 12pin V Male SMT Connector				
TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE		SEE NOTES 2		PREPARED BY ENGINEER IN CHARGE					DATE	
DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		PROCESS SPEC.		TYLER QIU					Jun-30-20	
				TYLER QIU						
				DESIGN ACTIVITY GROUP						
		THIRD ANGLE PROJECTION								