

4







3

2

GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS			
REV	DESCRIPTION	DATE	
A	INITIAL RELEASE	2020-06-30	

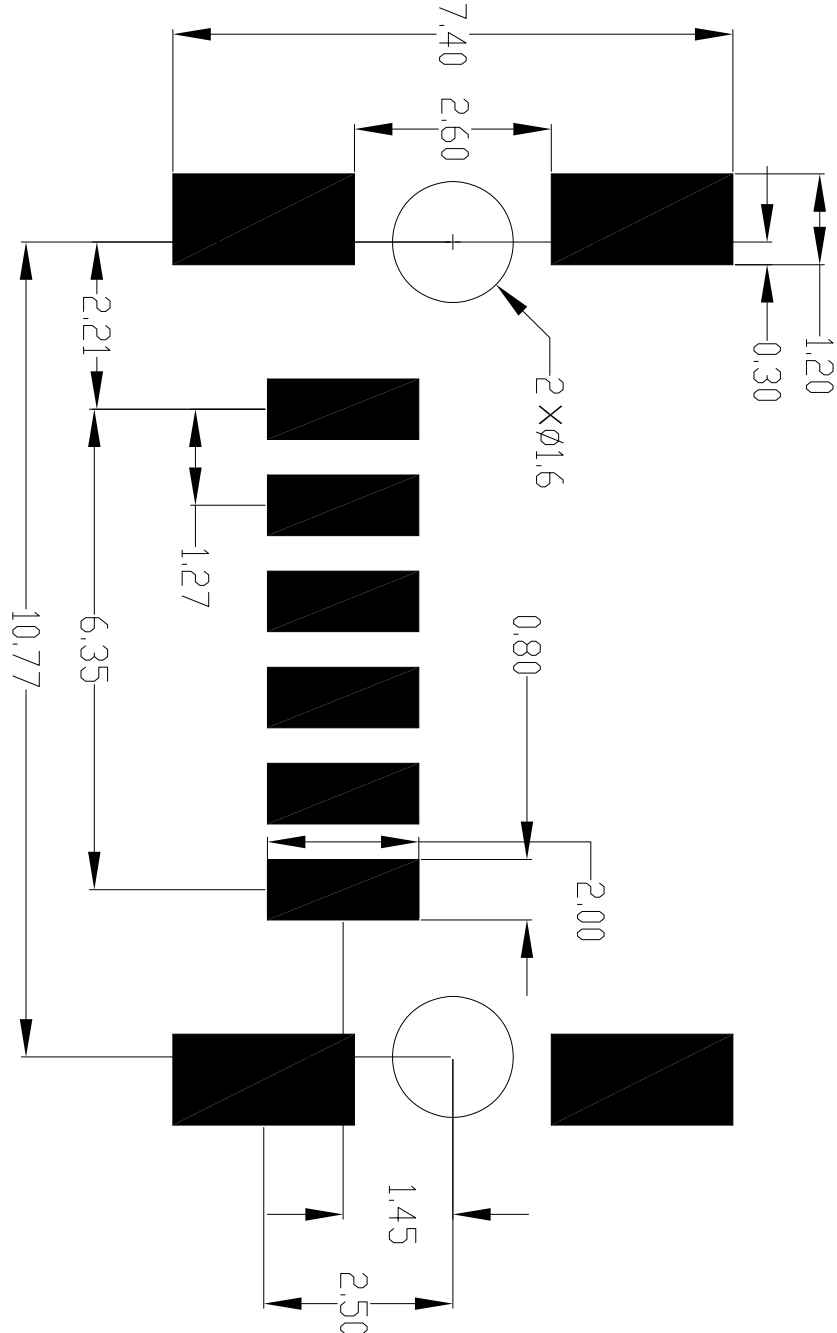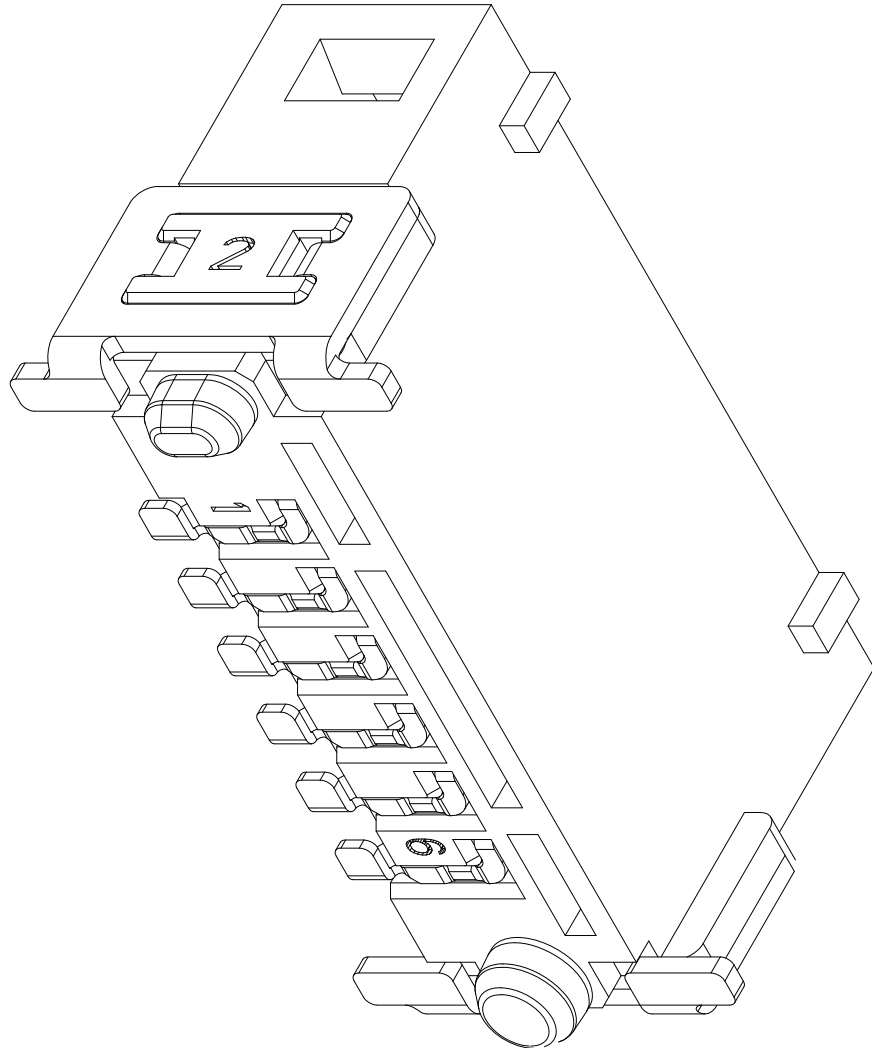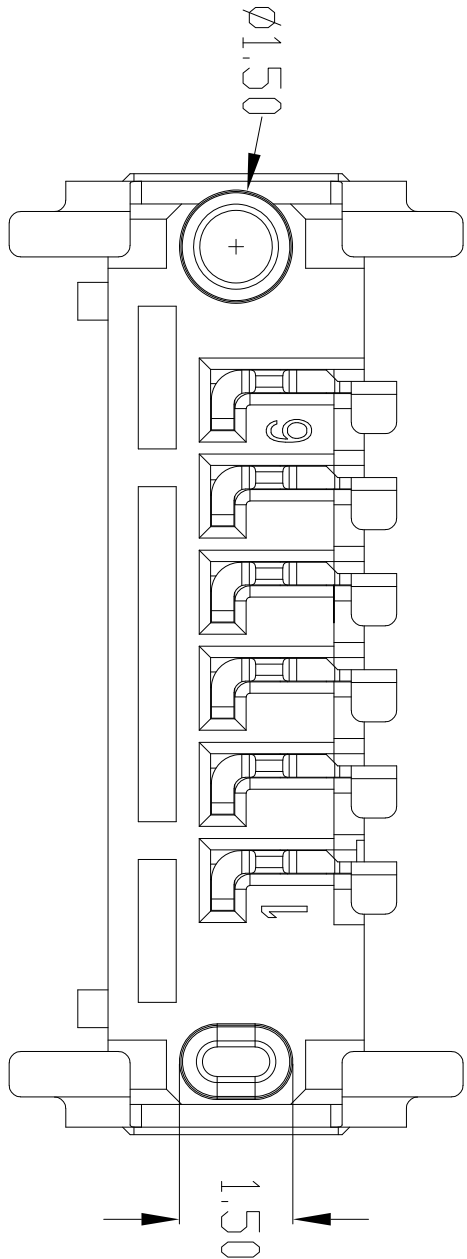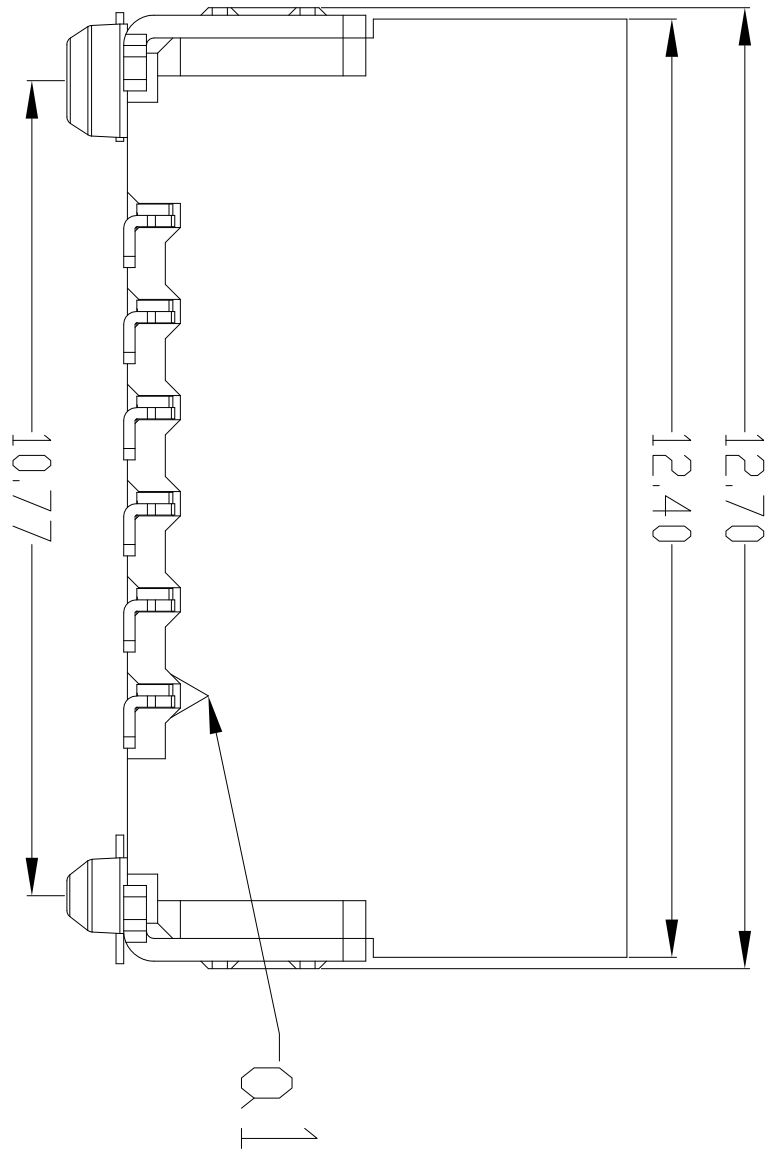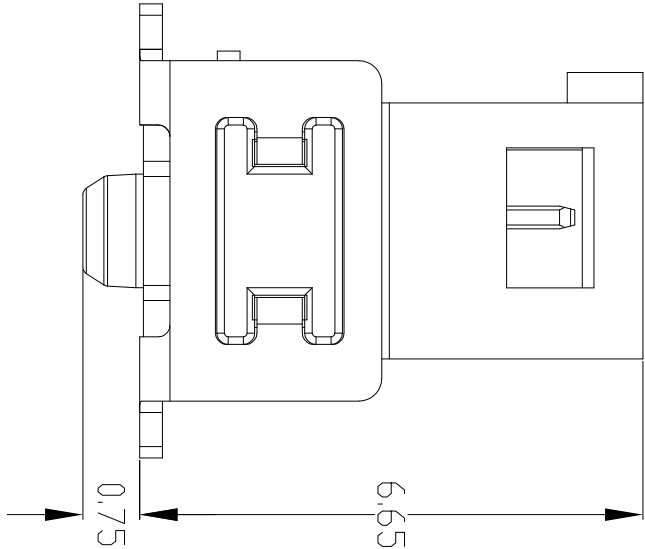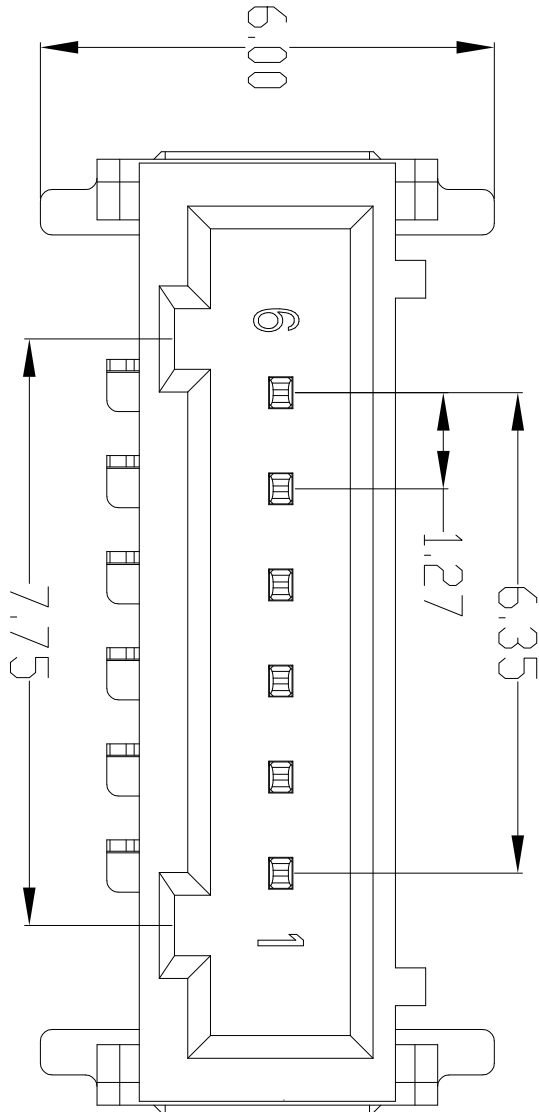

RECOMMENDED PCB-LAYOUT

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC.		APPROVALS		DATE		
TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE		SEE NOTES 2		PREPARED BY JUSTIN LI		Jun-30-20		
DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		PROCESS SPEC.		ENGINEER IN CHARGE TYLER QIU				
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		--		DESIGN MANAGER TYLER QIU				
				THIRD ANGLE PROJECTION				
