

4







3

2


GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

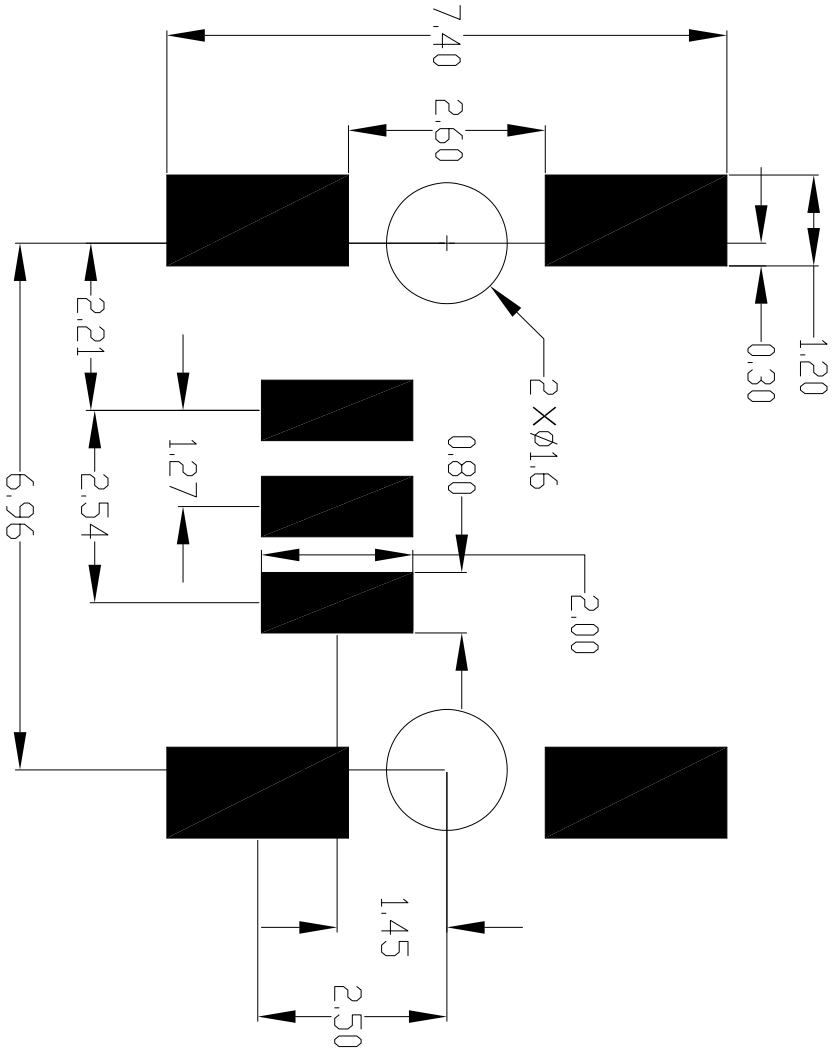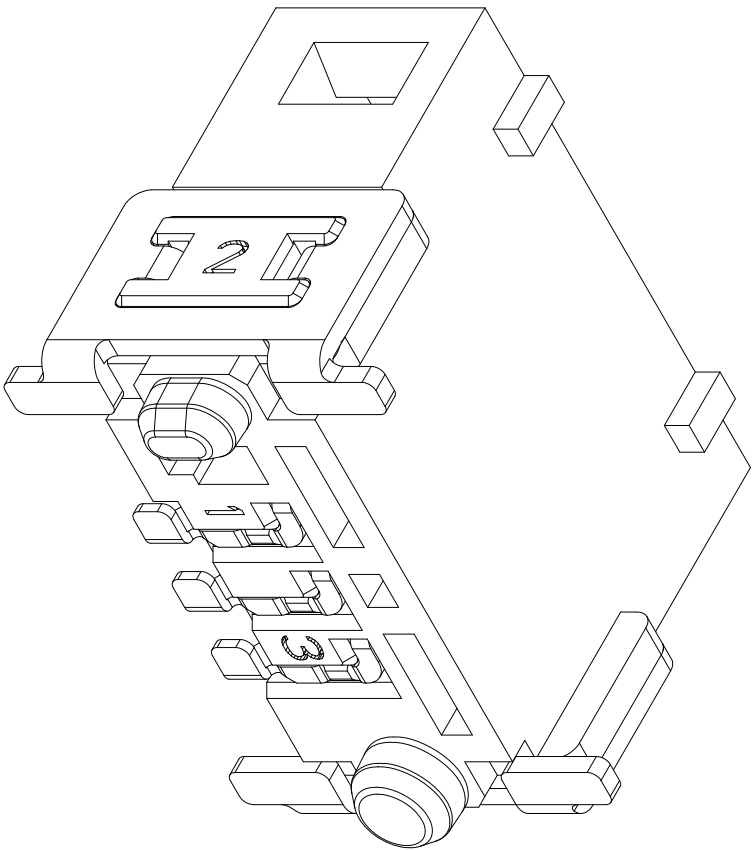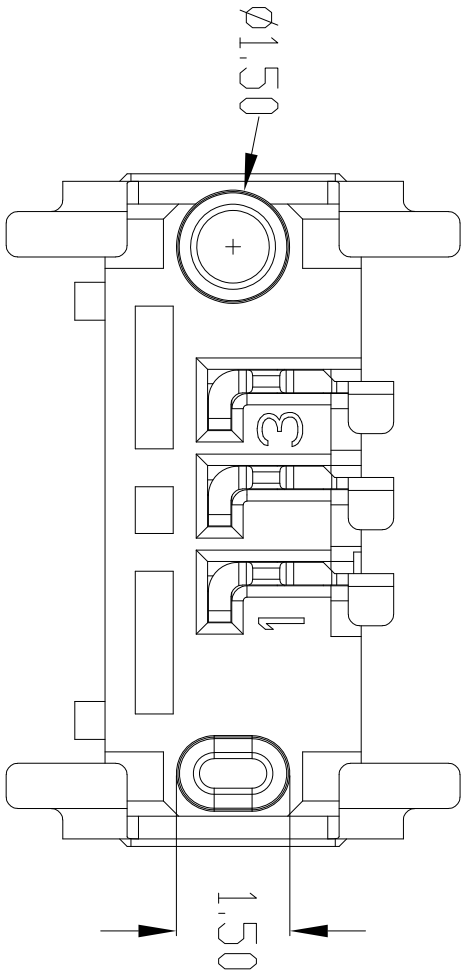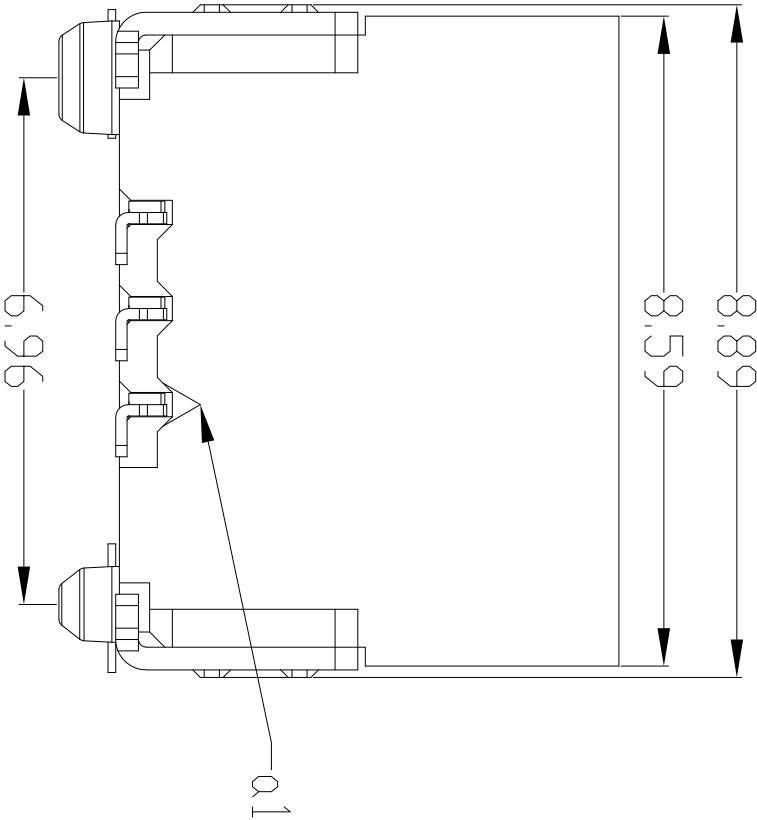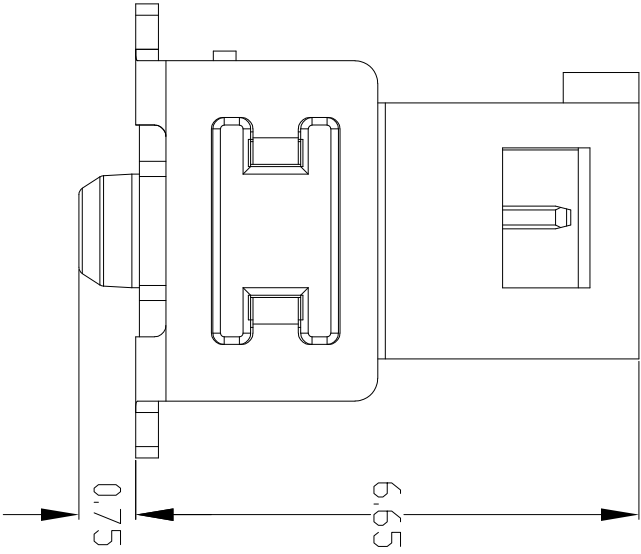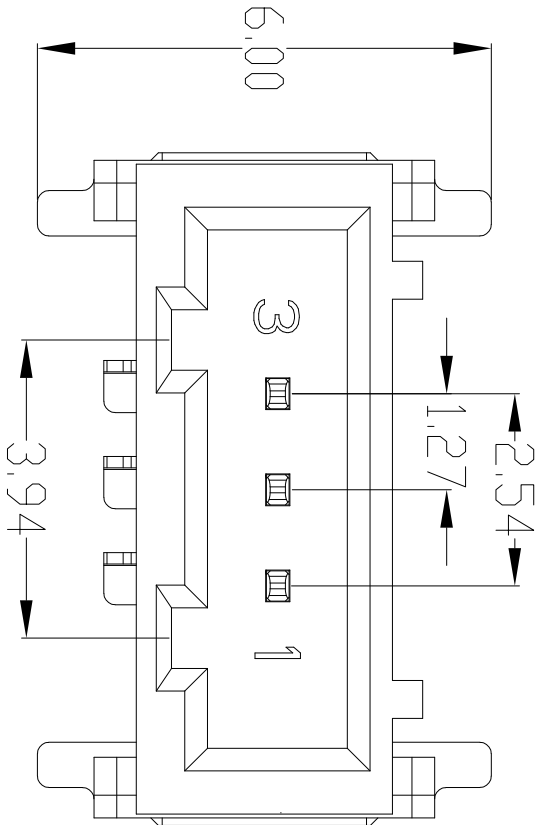

RECOMMENDED PCB-LAYOUT

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS				MATERIAL SPEC.		APPROVALS		DATE		上海良速电子有限公司 Powerlite 1.27mm Single Row 3pin V Male SMT Connector U	
TOLERANCES: ANGLES- ±2°				SEE NOTES 2		PREPARED BY JUSTIN LI		Jun-30-20			
DEFAULT LINEAR TOLERANCES SEE TABLE						ENGINEER IN CHARGE TYLER QIU					
DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000;						DESIGN MANAGER TYLER QIU					
						DESIGN ACTIVITY GROUP					
PROCESS SPEC.						THIRD ANGLE PROJECTION					
--											
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY										SCALE: REF. SHEET 1 OF 1	

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC: HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR. CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

A

B

C

D

4

3

2

1