
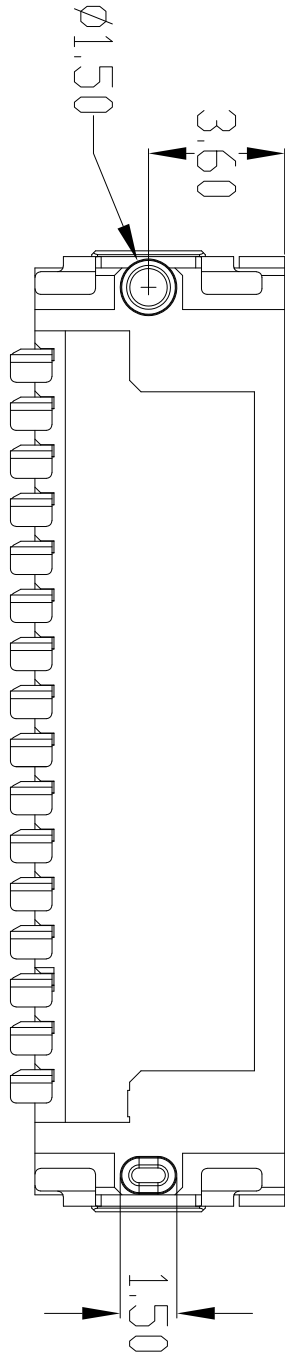
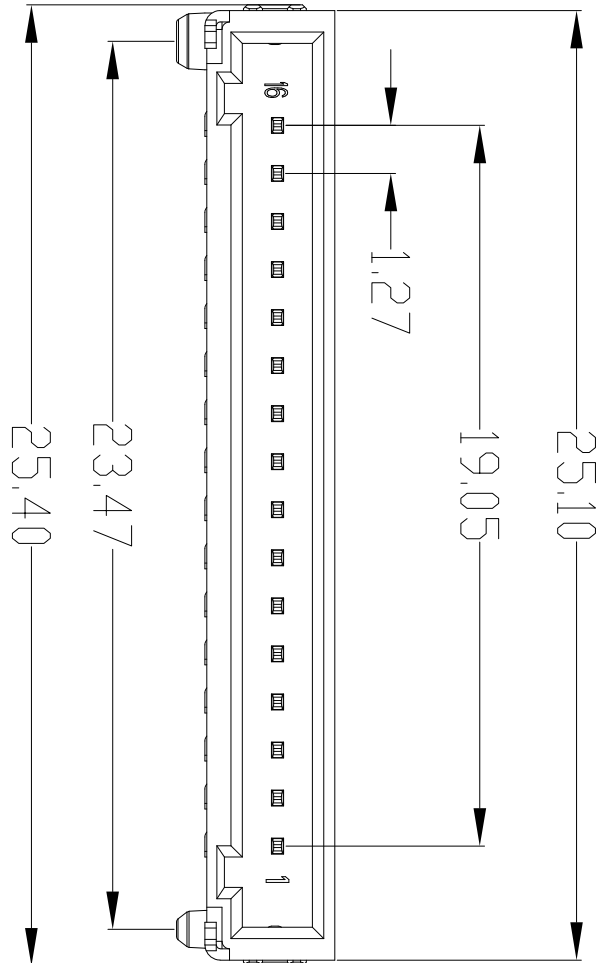
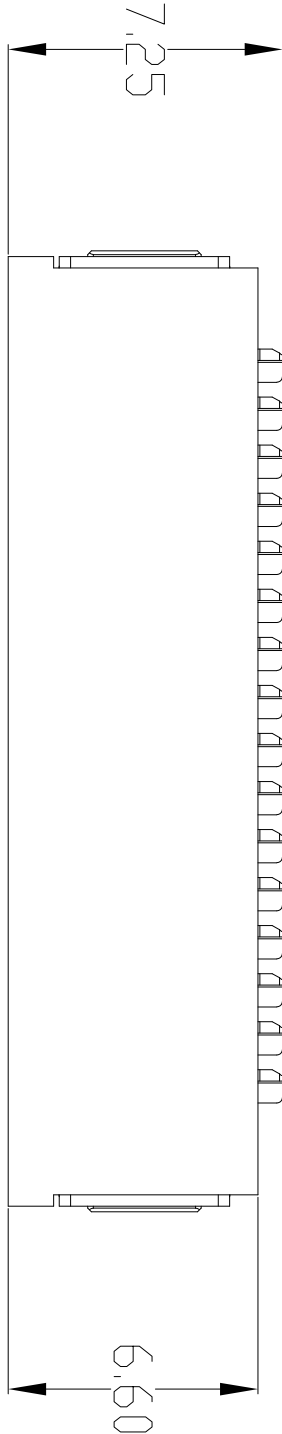
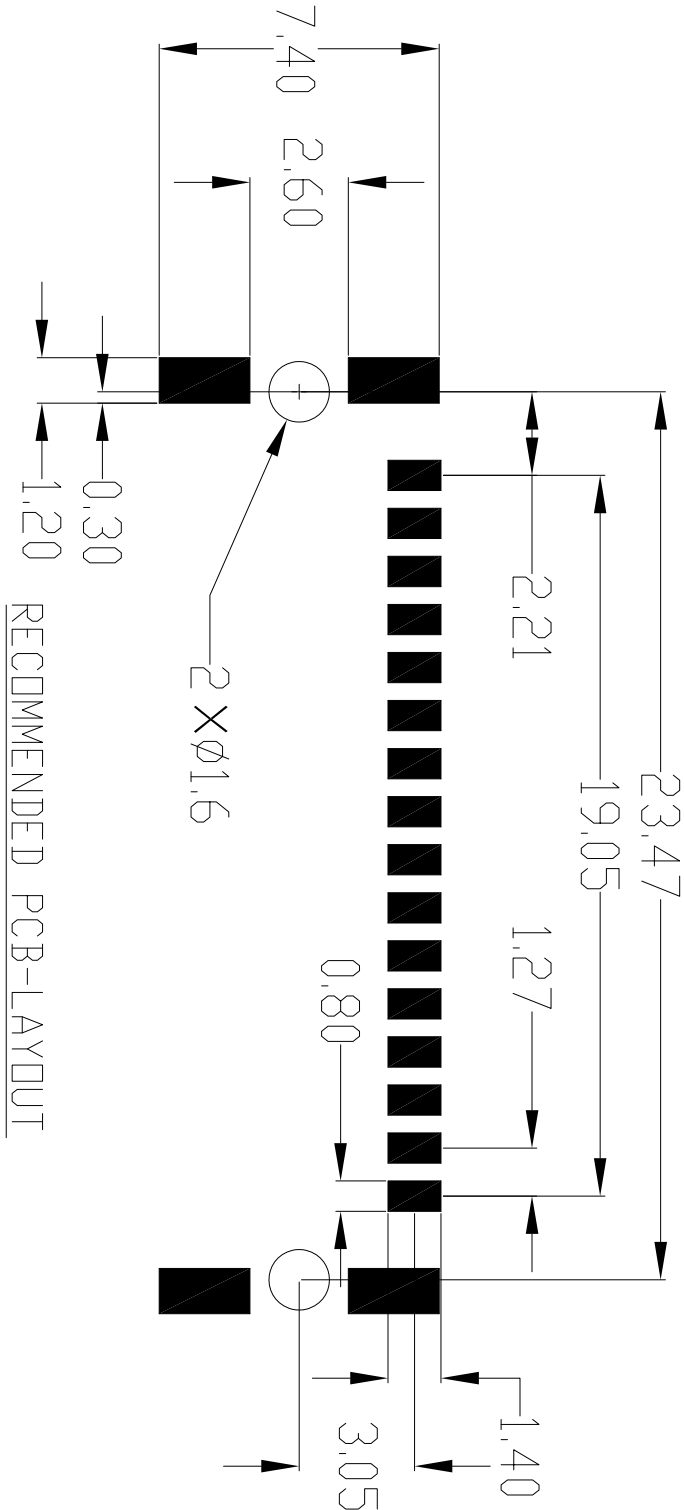
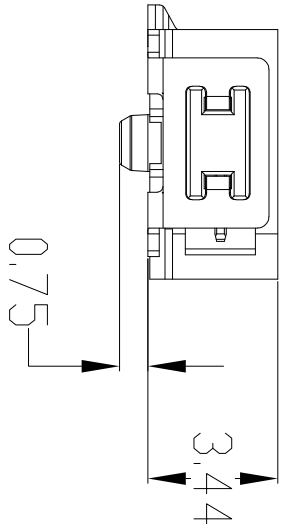


4

3

2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

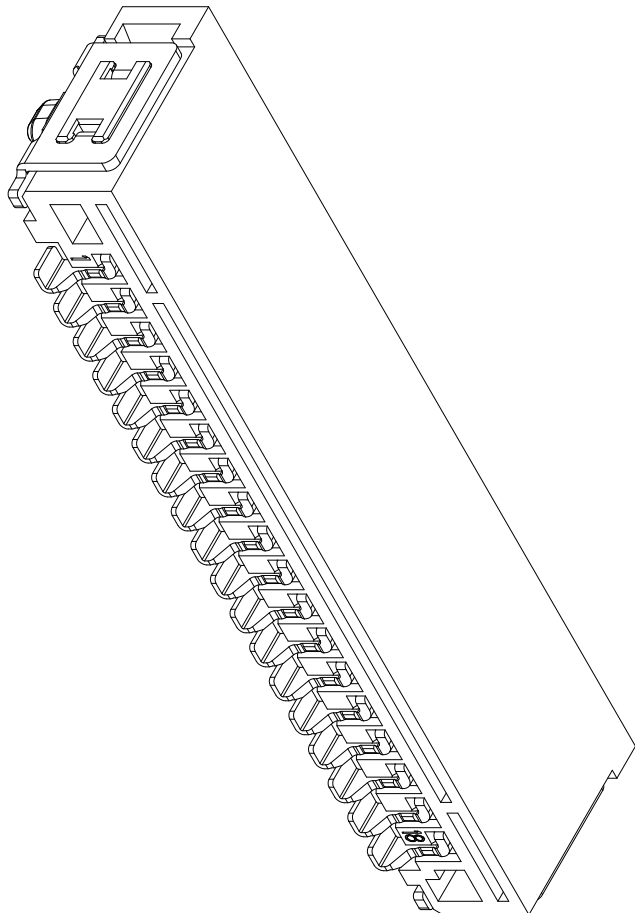


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row 16pin RA Male SMT Connector U	SHEET 1 OF 1
		SEE NOTES 2		PREPARED BY JUSTIN LI				
				ENGINEER IN CHARGE TYLER QIU		Jun-30-20		
				DESIGN MANAGER TYLER QIU				
		PROCESS SPEC.		DESIGN ACTIVITY GROUP				
		THIRD ANGLE PROJECTION						
		--						
				