
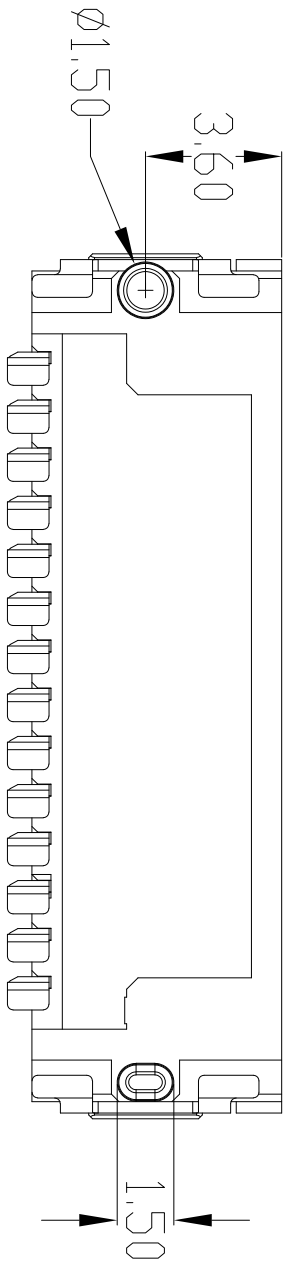
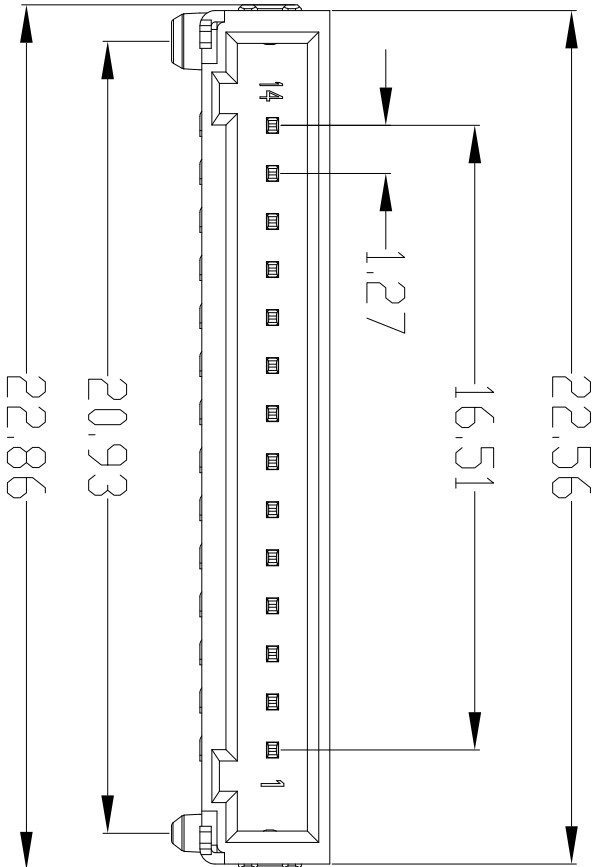
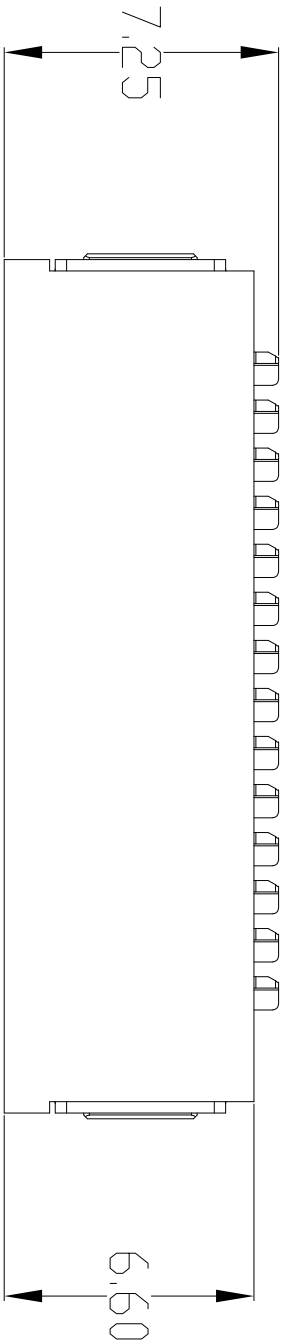
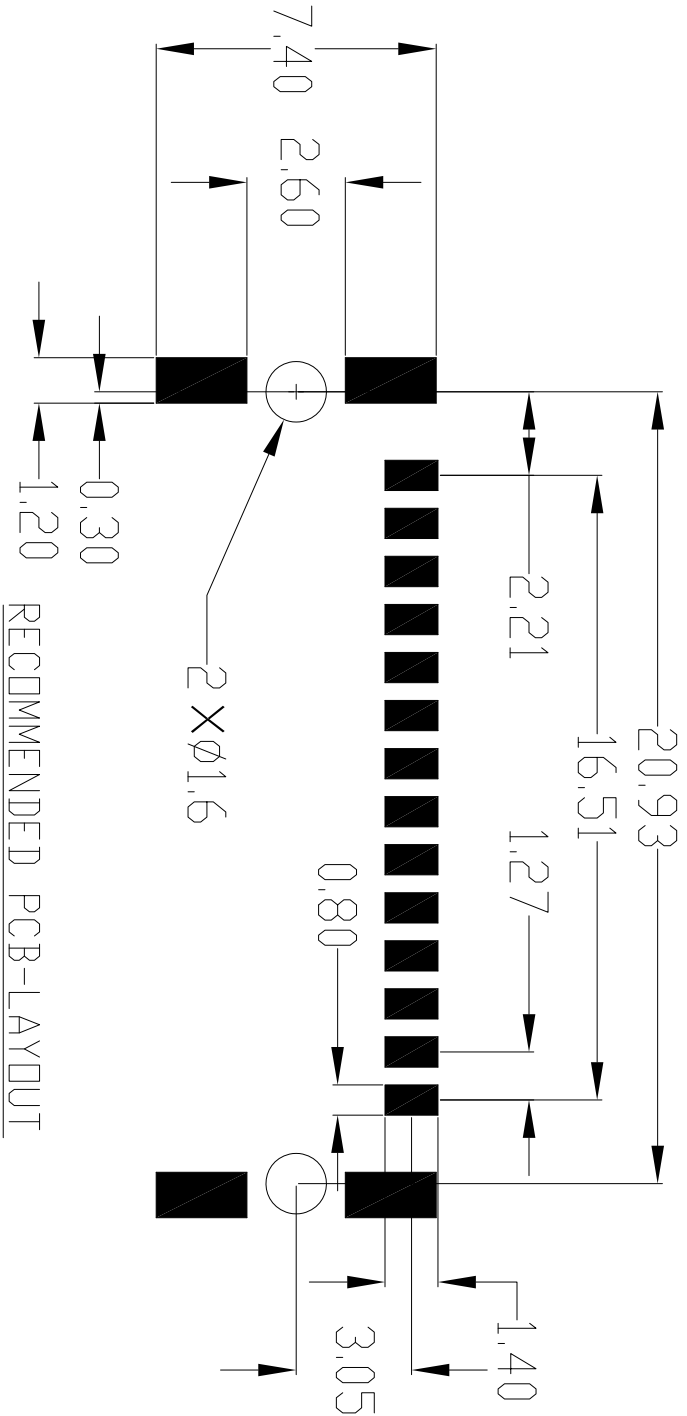
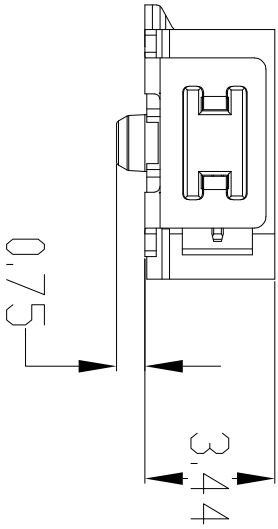


4

3

2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

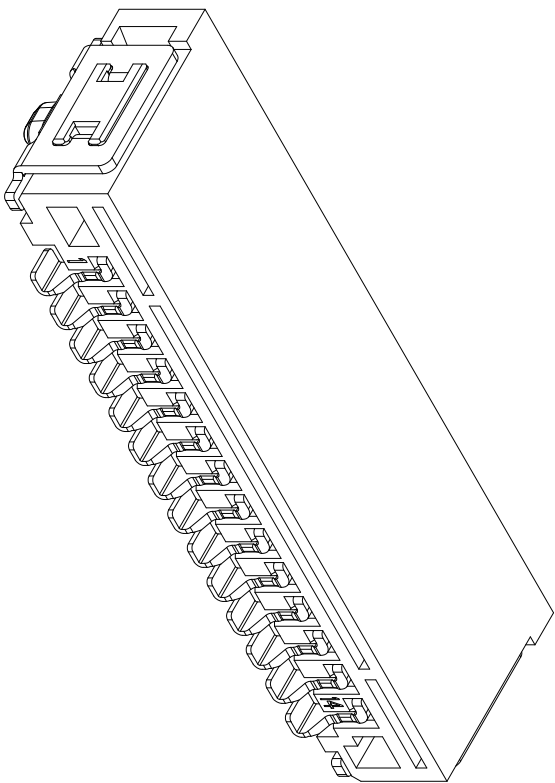

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	Initial release	2020-06-30
B	Drawing template update	2021-07-30

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC.		APPROVALS		DATE		THIRD ANGLE PROJECTION		Powerlite		1.27mm Single Row 14pin RA Male SMT Connector	
TOLERANCES: ANGLES: ±2°		SEE NOTES 2		PREPARED BY JUSTIN LI		JUL 30 2021		THIRD ANGLE PROJECTION		1.27mm Single Row 14pin RA Male SMT Connector		U	
DEFAULT LINEAR TOLERANCES SEE TABLE		PROCESS SPEC.		DESIGN MANAGER TYLER QIU		TYLER QIU		THIRD ANGLE PROJECTION		1.27mm Single Row 14pin RA Male SMT Connector		U	
DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000;		PROCESS SPEC.		DESIGN ACTIVITY GROUP		TYLER QIU		THIRD ANGLE PROJECTION		1.27mm Single Row 14pin RA Male SMT Connector		U	
LEGENDS: -FLAG NOTE CALL OUT		PROCESS SPEC.		DESIGN ACTIVITY GROUP		TYLER QIU		THIRD ANGLE PROJECTION		1.27mm Single Row 14pin RA Male SMT Connector		U	
REFERENCE ONLY		PROCESS SPEC.		DESIGN ACTIVITY GROUP		TYLER QIU		THIRD ANGLE PROJECTION		1.27mm Single Row 14pin RA Male SMT Connector		U	

4

3

2

1