


4

3





2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

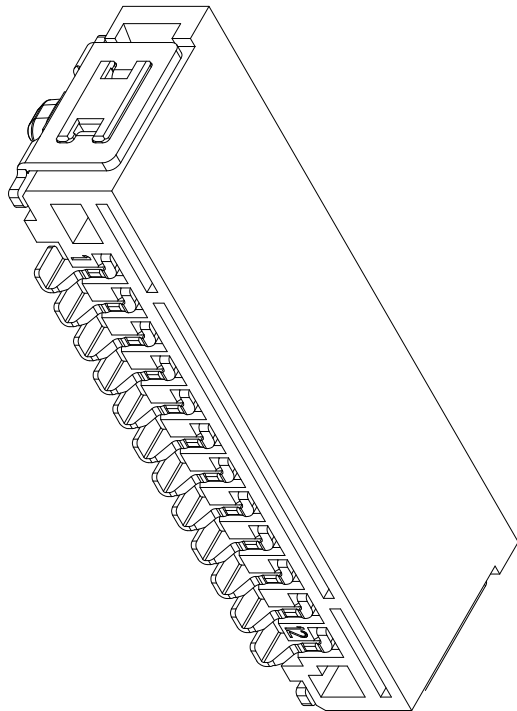

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	Initial release	2020-06-30
B	Drawing template update	2021-07-30

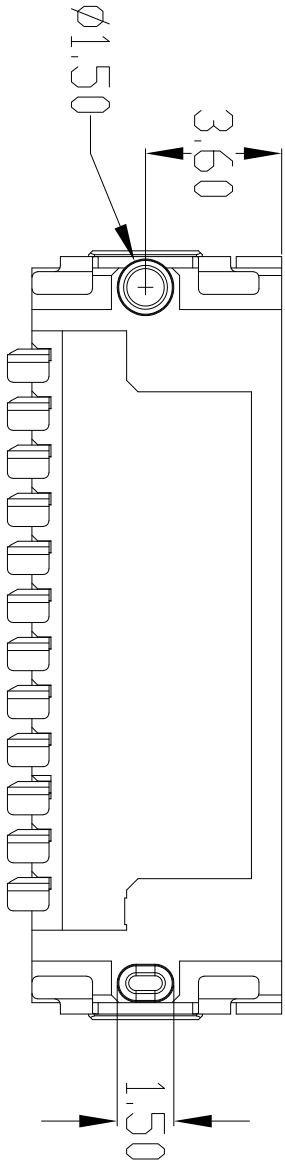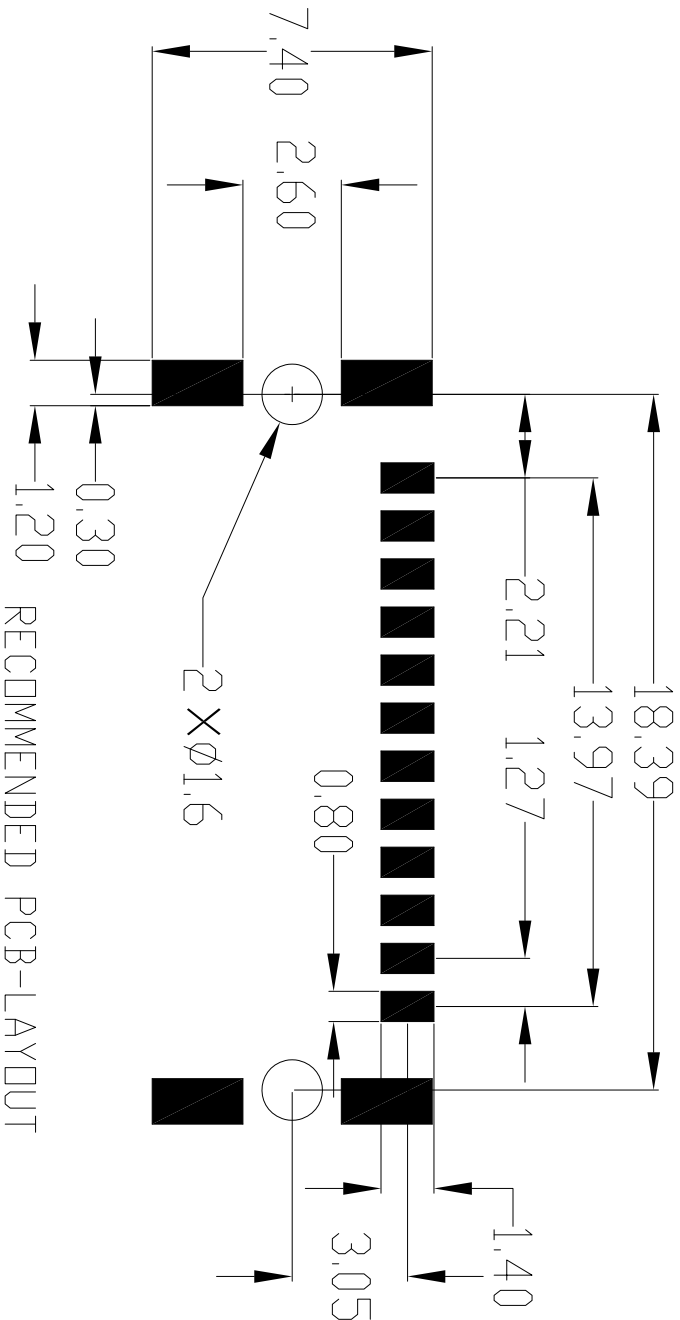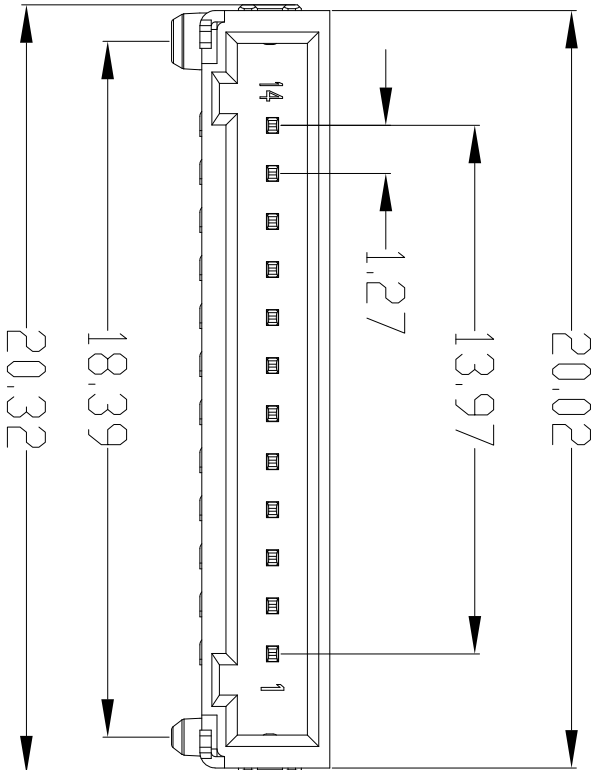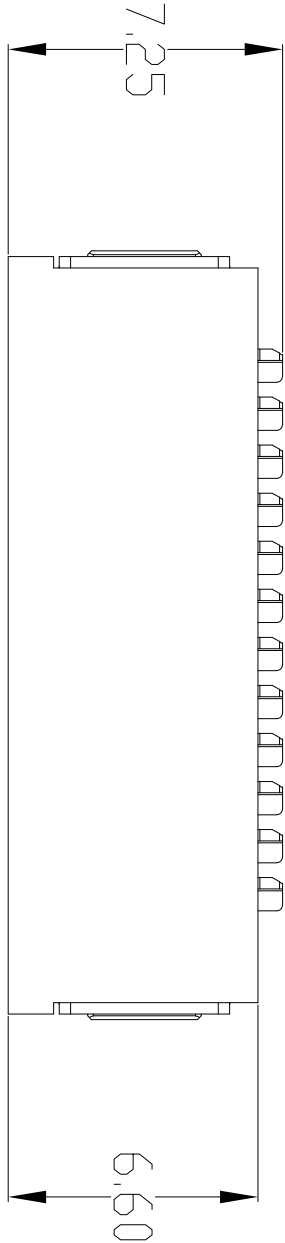

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC. SEE NOTES 2		APPROVALS		DATE		THIRD ANGLE PROJECTION		上海良速电子有限公司		Powerlite	
TOLERANCES: ANGLES: ±2°		DEFAULT LINEAR TOLERANCES SEE TABLE		PREPARED BY JUSTIN LI		JUL 30 2021		DESIGN MANAGER TYLER QIU		1.27mm Single Row 12pin RA Male SMT Connector		U	
DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000;		PROCESS SPEC.		--		--		THIRD ANGLE PROJECTION		SIZE C		DOCUMENT NO PL-MA12101	
LEGENDS: -FLAG NOTE CALL OUT REFERENCE ONLY		--		THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION		THIRD ANGLE PROJECTION		SCALE:		SHEET 1 OF 1	

A

B

C

4

3

2

1