


4

3




2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

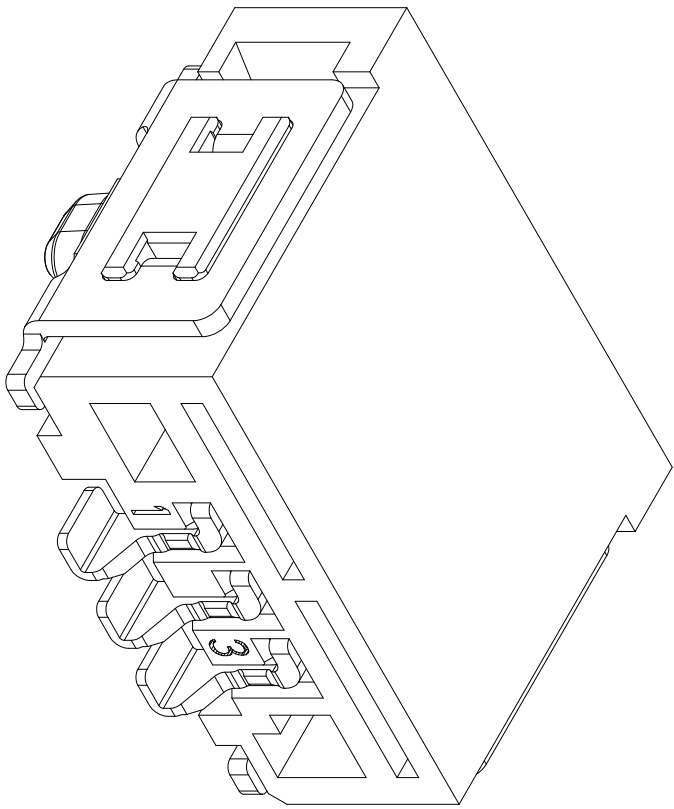


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30
B	Drawing templet update	2021-07-30

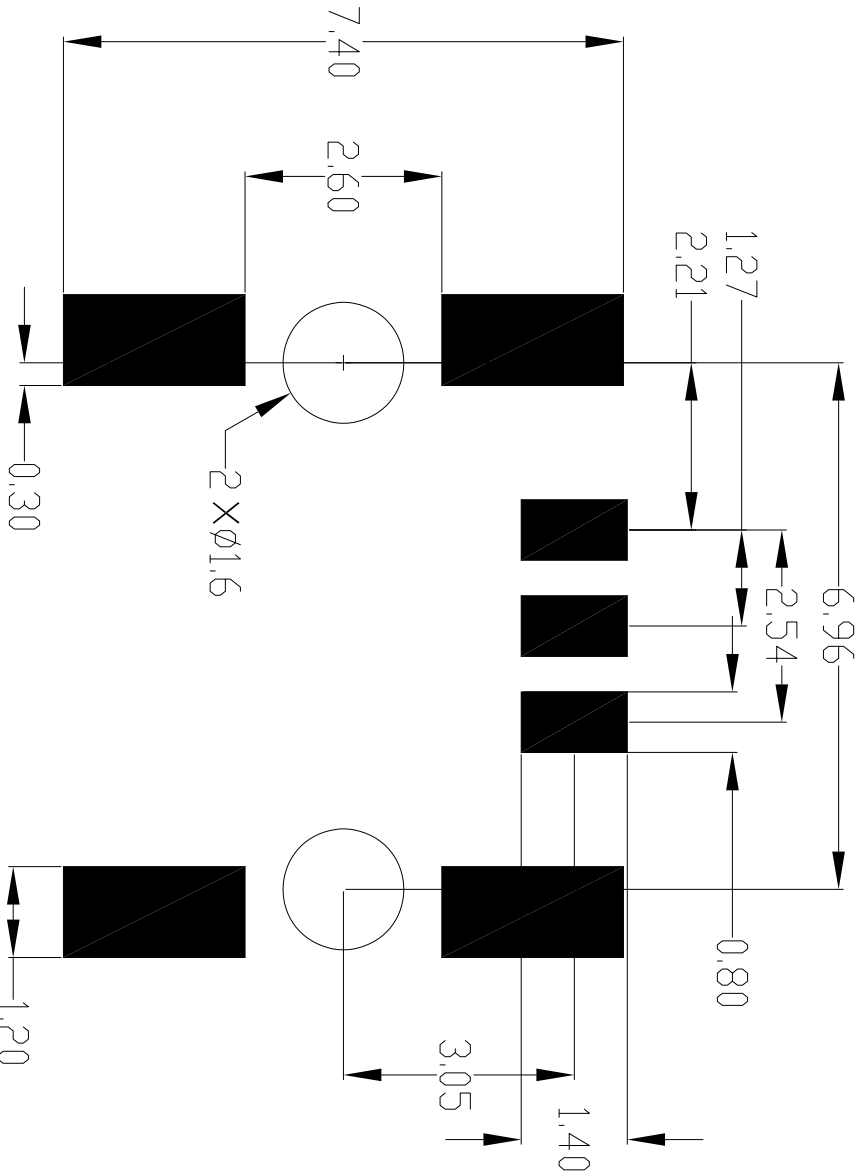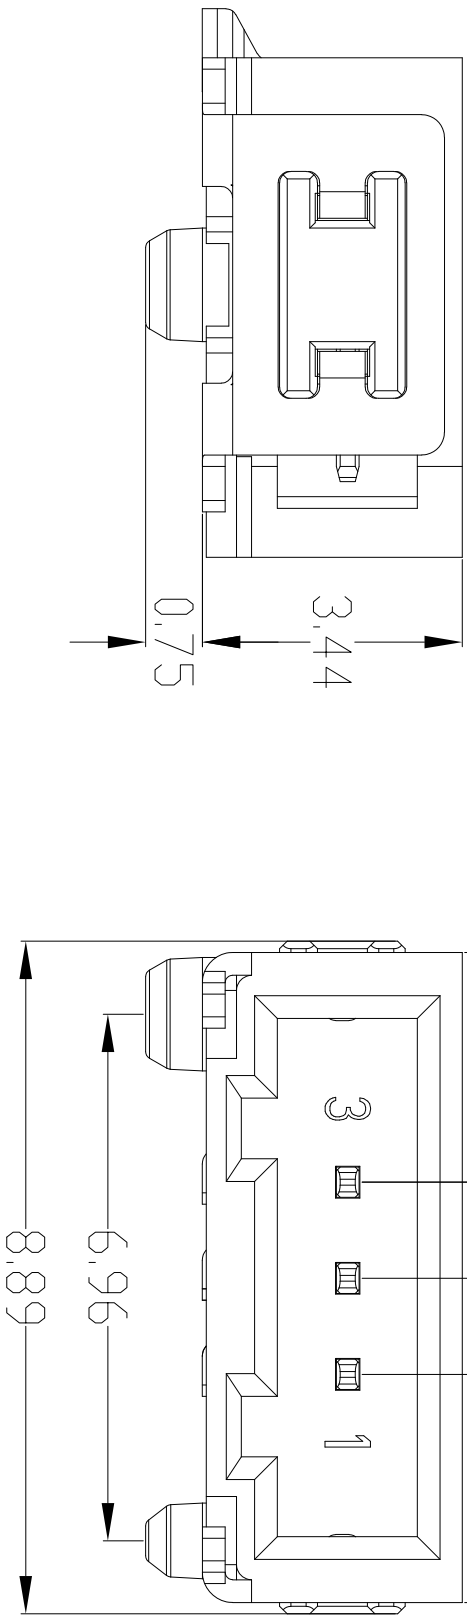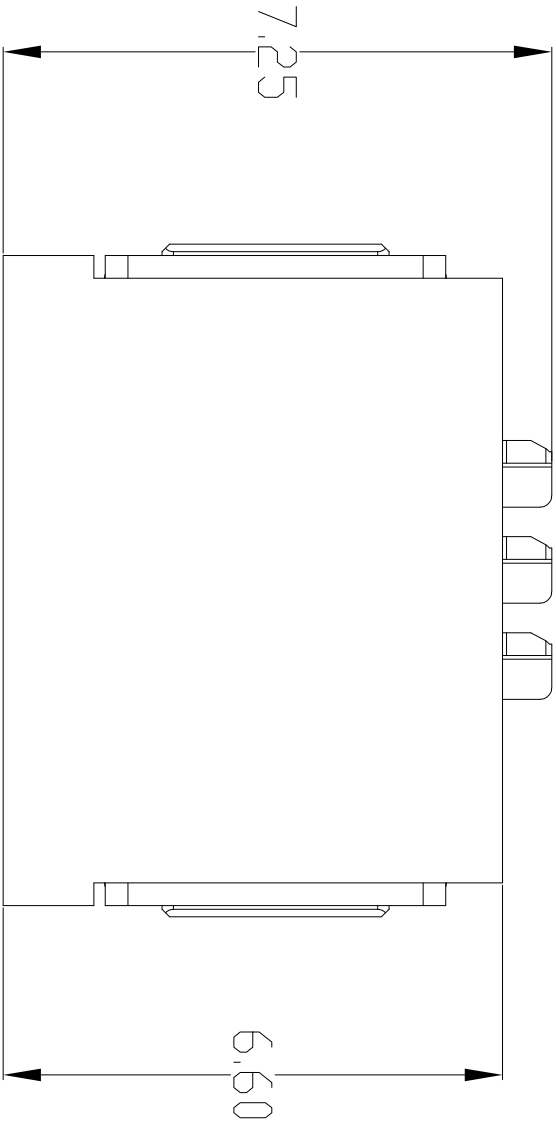

RECOMMENDED PCB-LAYOUT

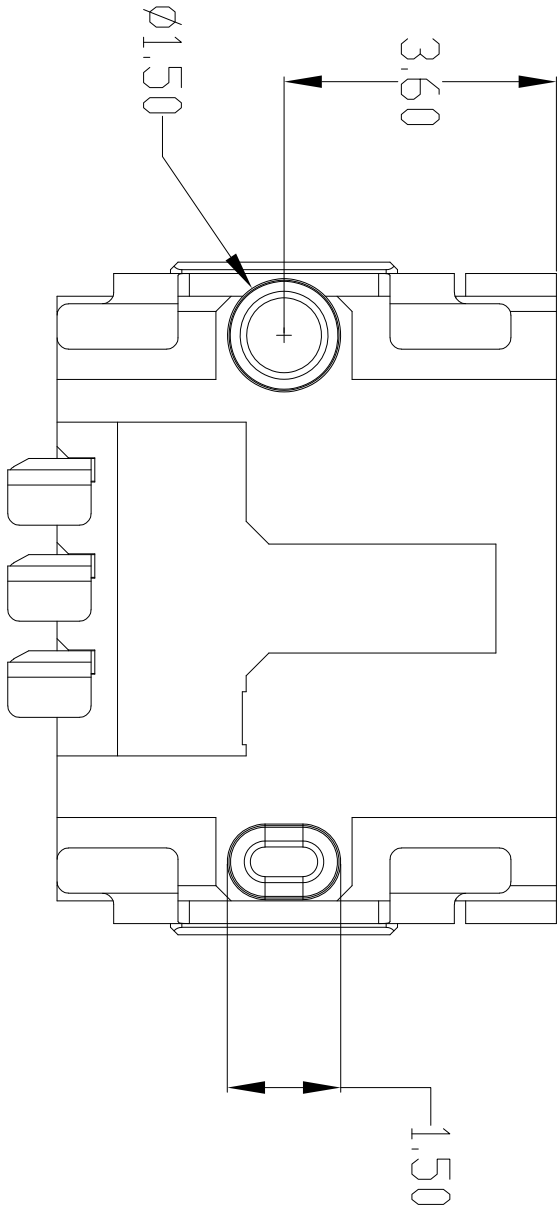

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PARI		NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC.		APPROVALS		DATE		PREPARED BY		JUSTIN LI		JUL 30 2021		上海良速电子有限公司	
TOLERANCES: ANGLES: ±2°		SEE NOTES 2		ENGINEER IN CHARGE		TYLER QIU		DESIGN MANAGER		TYLER QIU		THIRD ANGLE PROJECTION		Powerlite	
DEFAULT LINEAR TOLERANCES SEE TABLE		PROCESS SPEC.		--		--		DESIGN ACTIVITY GROUP		THIRD ANGLE PROJECTION		1.27mm Single Row 3pin RA Male SMT Connector		U	
DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000;		--		--		--		--		--		--		SIZE	
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		--		--		--		--		--		--		C	
--		--		--		--		--		--		--		DOCUMENT NO	
--		--		--		--		--		--		--		PL-MA03101	
--		--		--		--		--		--		--		REV	
--		--		--		--		--		--		--		B	
--		--		--		--		--		--		--		SCALE:	
--		--		--		--		--		--		--		SHEET 1 OF 1	

3

2

1

4