

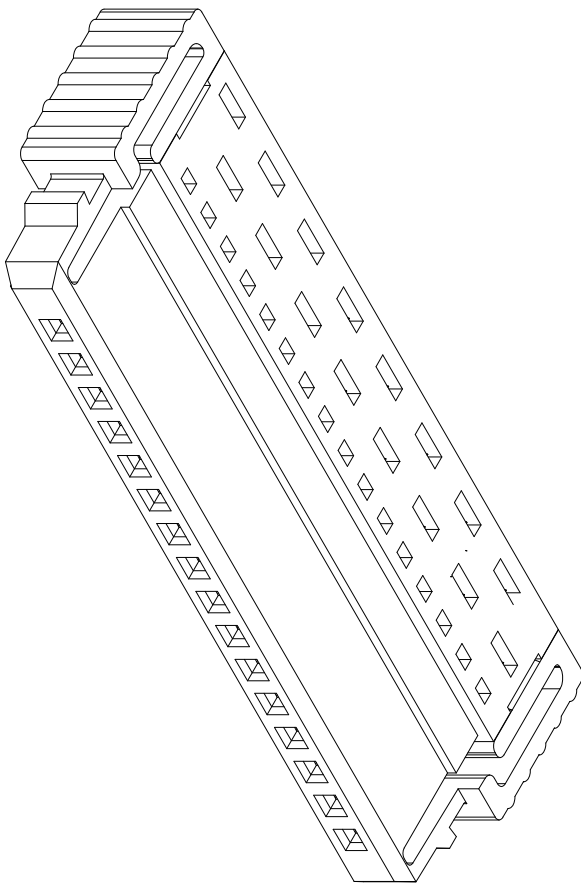
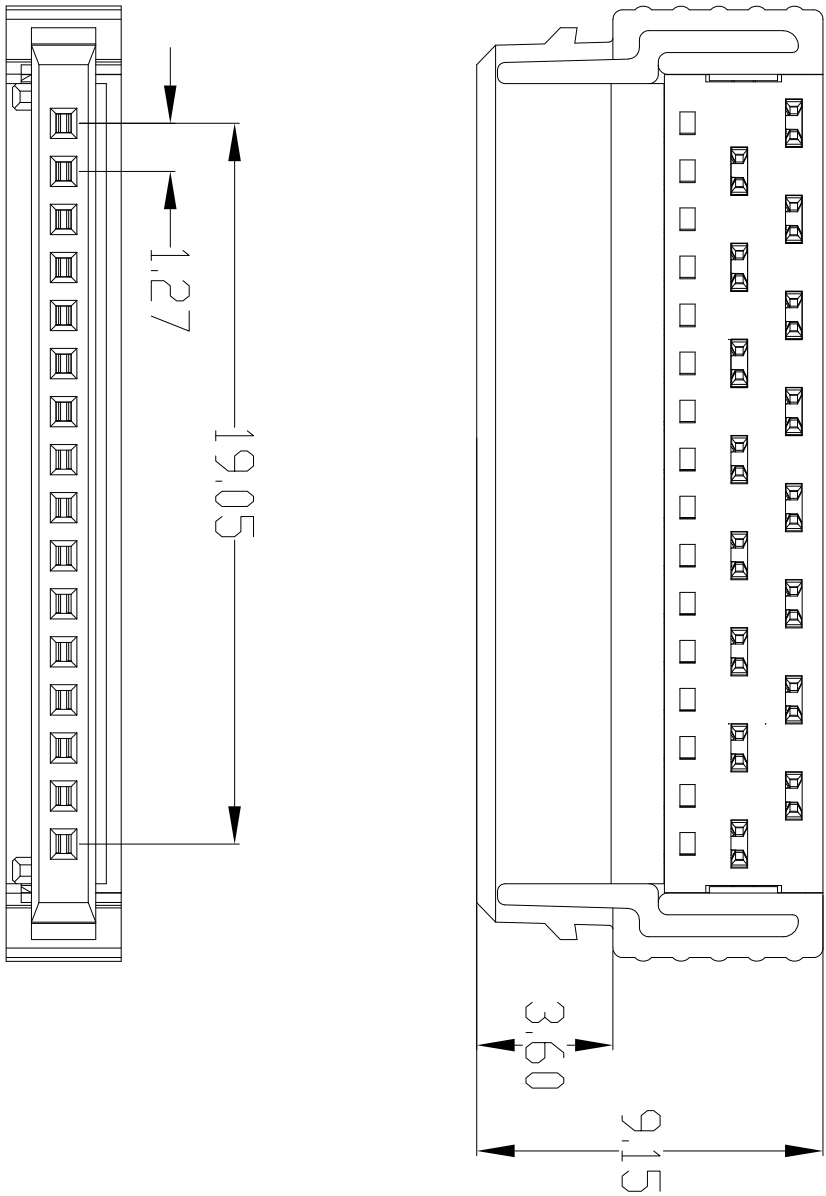


GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

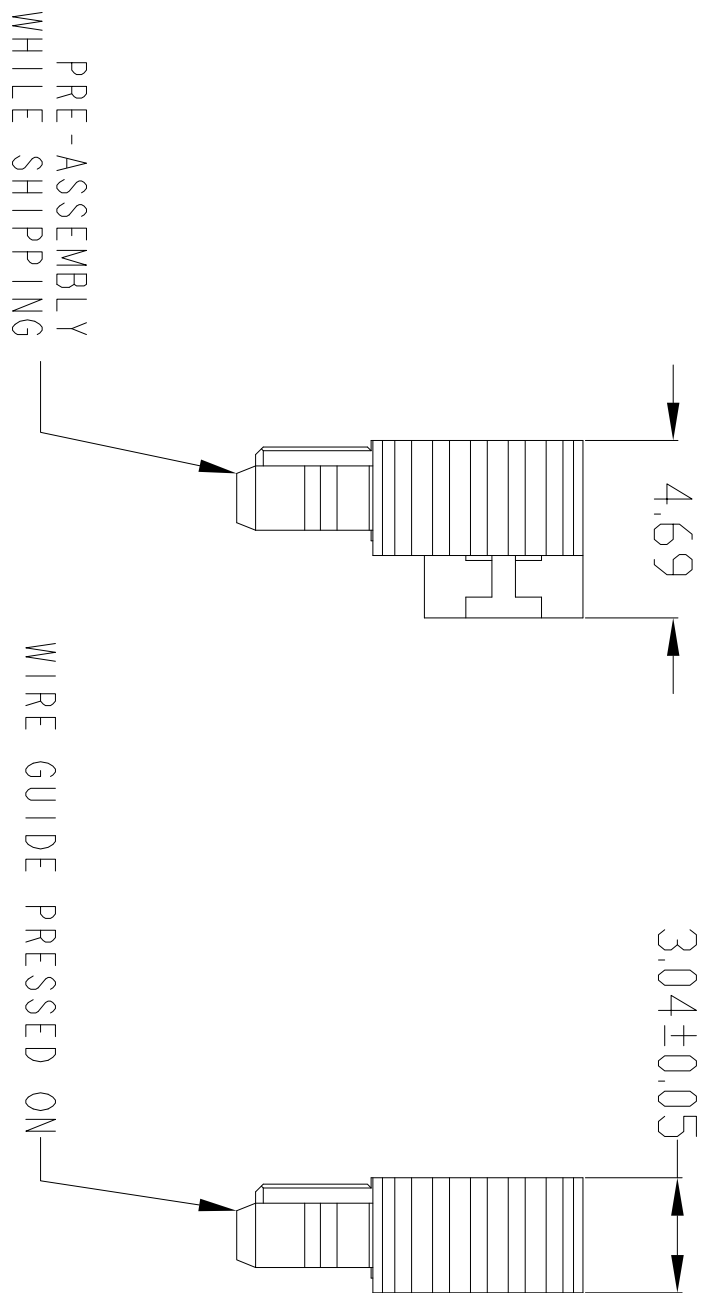


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

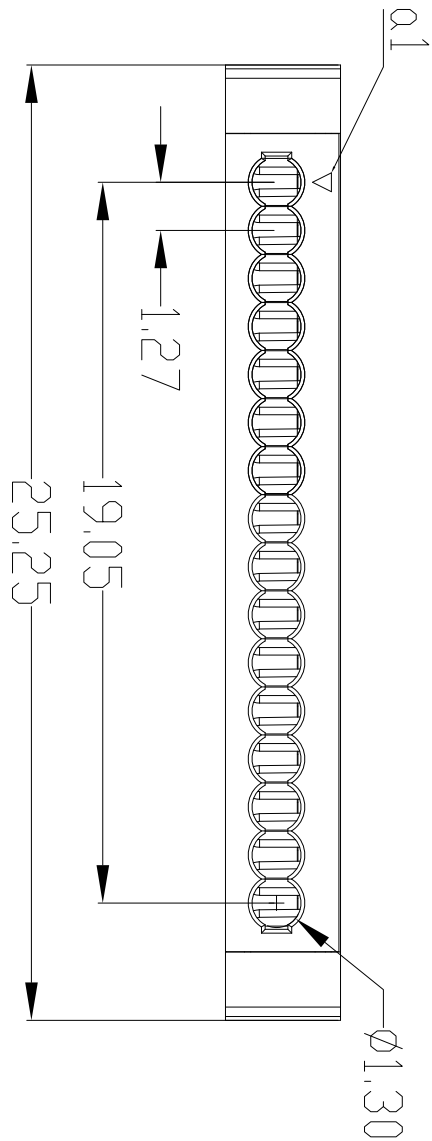

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4T-GF30 TREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Powerlite 1.27mm Single Row 16pin Female 180° cable outlet U				
				SEE NOTES 2						
				PROCESS SPEC.						
				--						
				THIRD ANGLE PROJECTION						
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				APPROVALS		DATE		SIZE C DOCUMENT NO PL-FS16101 REV/ A		
PREPARED BY JUSTIN LI		TYLER QIU		Jan-30-20						
ENGINEER IN CHARGE		TYLER QIU								
DESIGN MANAGER		TYLER QIU								
DESIGN ACTIVITY GROUP										
										
SCALE:								SHEET 1 OF 1		