


4

3





2

GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

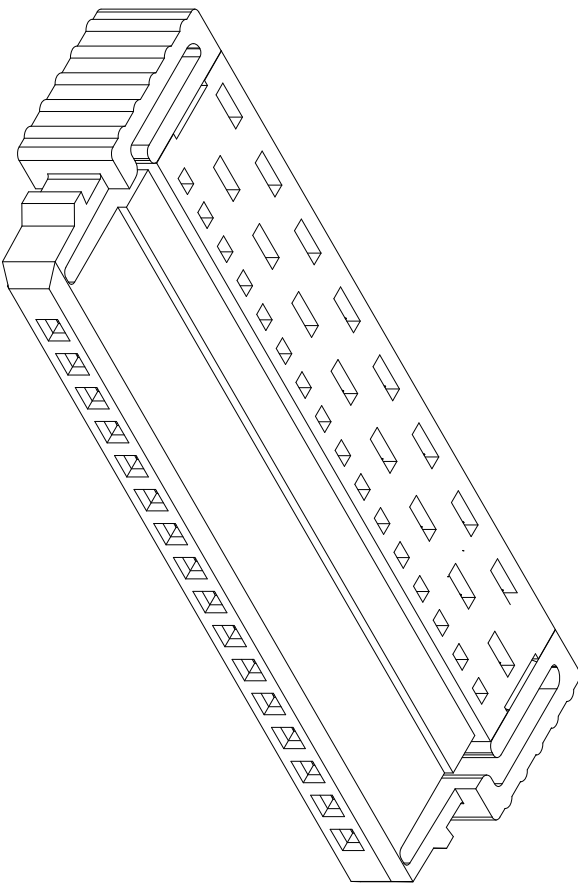



CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

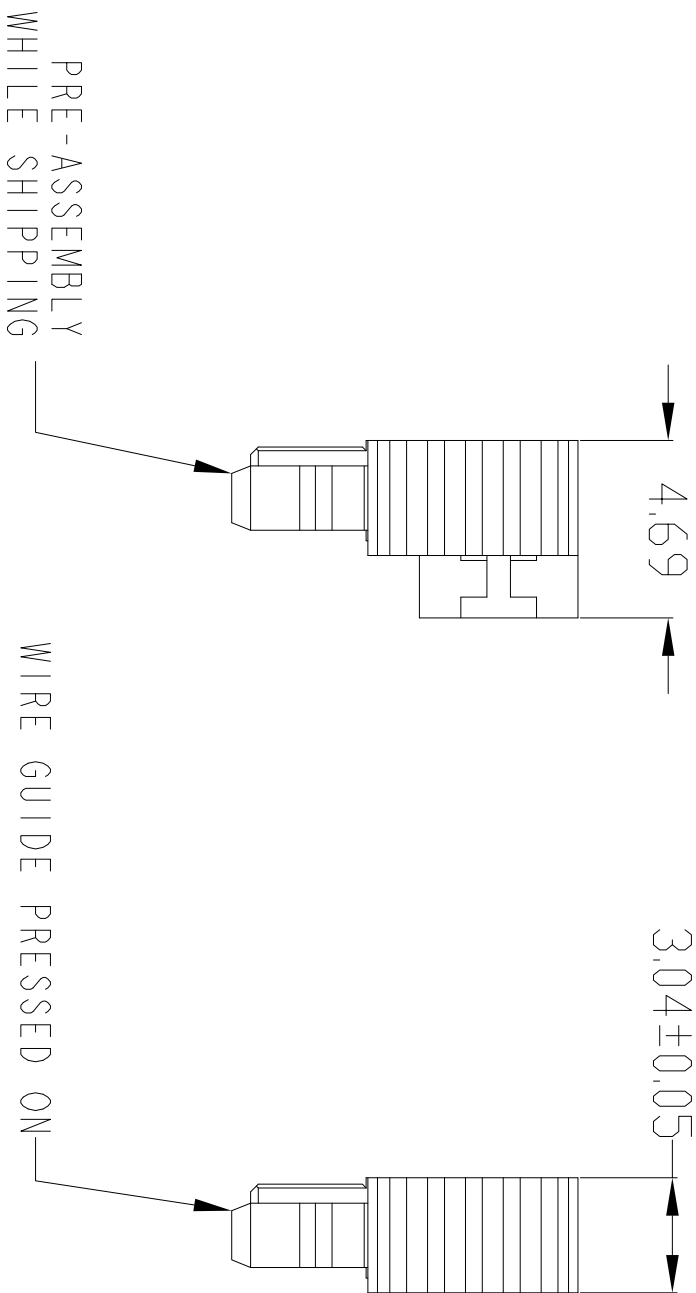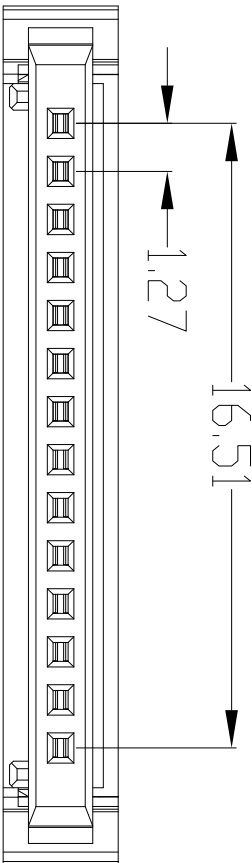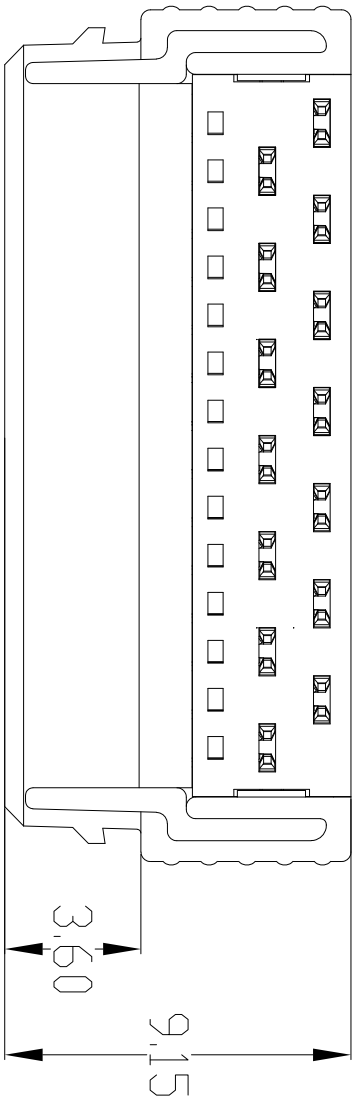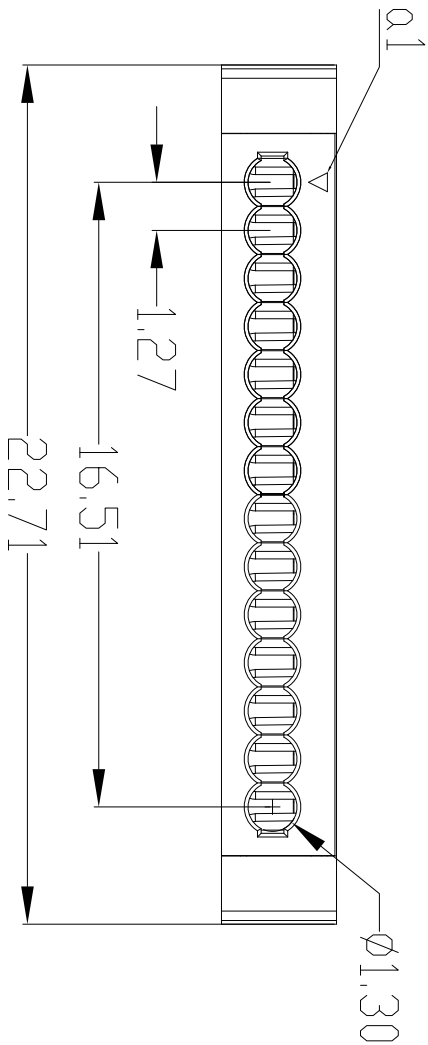

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: PA4T-GF30 THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000;				MATERIAL SPEC.		APPROVALS DATE PREPARED BY JUSTIN LI ENGINEER IN CHARGE TYLER QIU DESIGN MANAGER TYLER QIU DESIGN ACTIVITY GROUP Jun-30-20 THIRD ANGLE PROJECTION 			
				SEE NOTES 2					
				PROCESS SPEC.					
				--					
LEGENDS:				THIRD ANGLE PROJECTION		上海良速电子有限公司 Powerlite 1.27mm Single Row 14pin Female 180° cable outlet U			
=FLAG NOTE CALL OUT REFERENCE ONLY									
									

A

B

C

D

4

3

2

1