






GENERAL TOLERANCE

DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING


REVISIONS

REV	DESCRIPTION	DATE
A	PRELIMINARY VERSION	2020-06-18

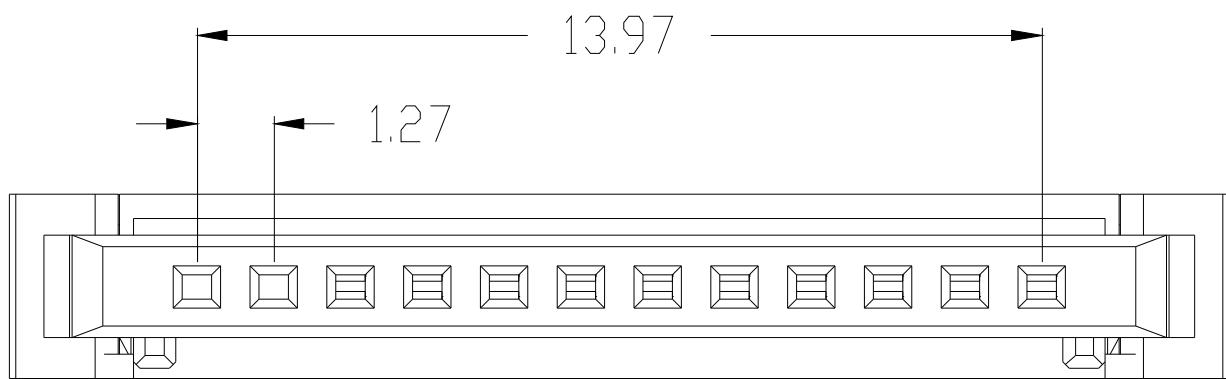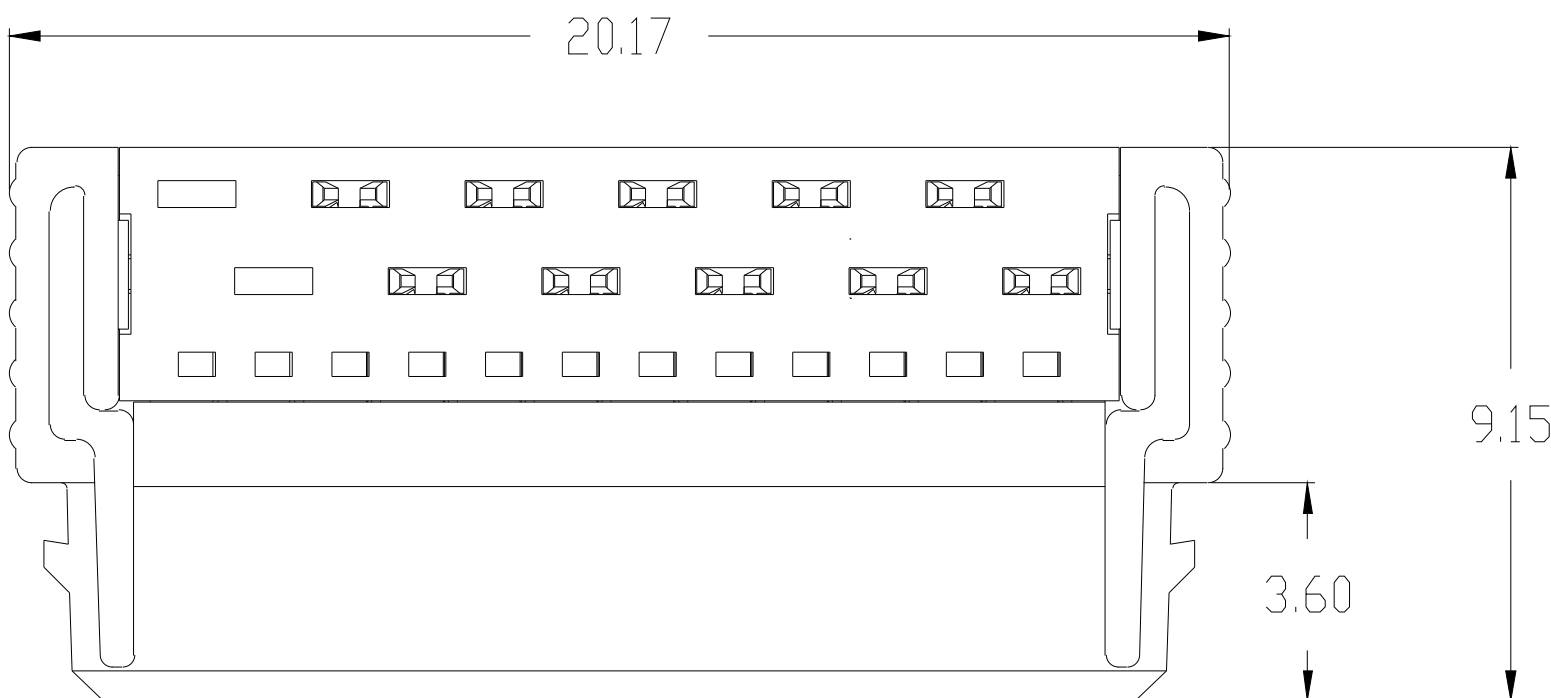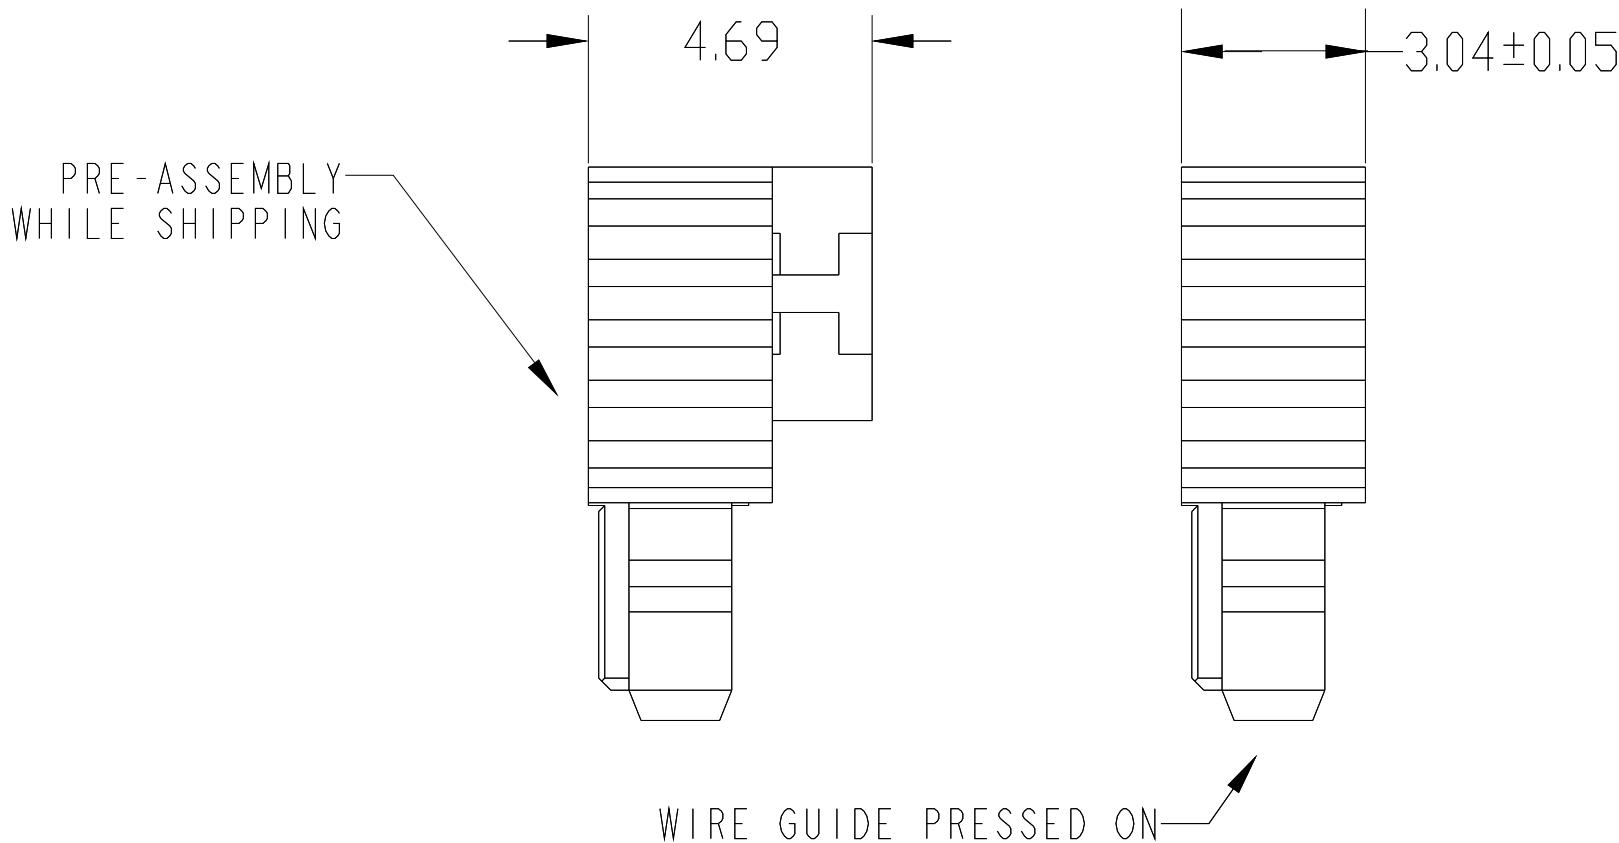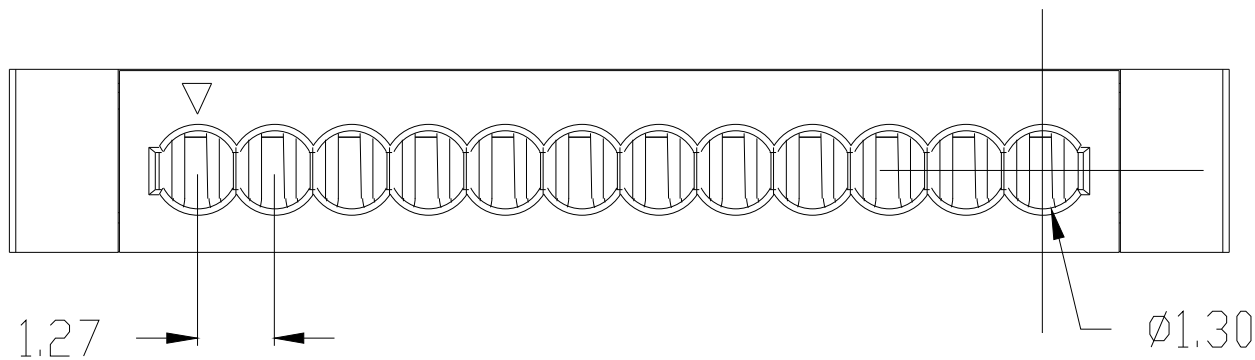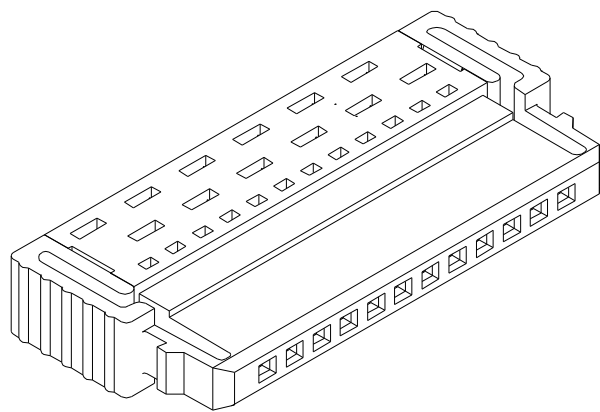

NOTES:

1. THE PRODUCTS ARE ROHS COMPLIANCE.
2. MATERIAL SPEC:
HOUSING:PATHREMOPLASTIC,UL94 V-0,BLACK COLOR
CONTACT:COPPER ALLOY,
MATING AREA GOLD PLATING
OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.	PARTS LIST					
		SEE NOTES 2		APPROVALS		DATE	上海良速电子有限公司 Powerlite 12Pin 1.27mm Single Row Female 180 cable outlet	
				PREPARED BY TYLER OIU		Jun-18-20		
				ENGINEER IN CHARGE TYLER OIU				
				DESIGN MANAGER TYLER OIU				
				DESIGN ACTIVITY GROUP				
		PROCESS SPEC.	THIRD ANGLE PROJECTION		SIZE		DOCUMENT NO.	PL-FS12101
				C			A	
				SCALE: 8		REF.	SHEET 1 OF 1	