

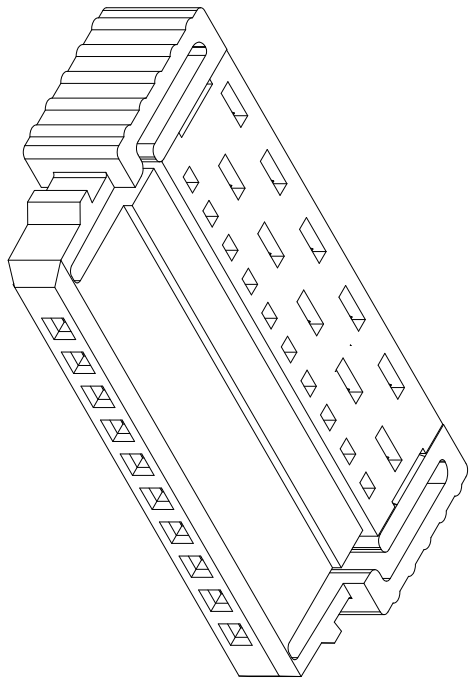
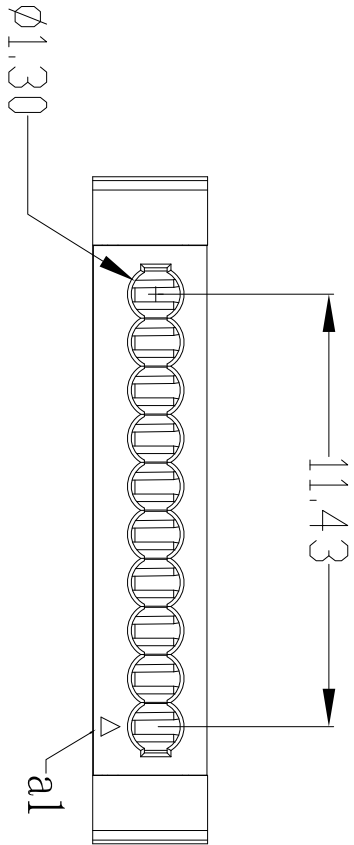
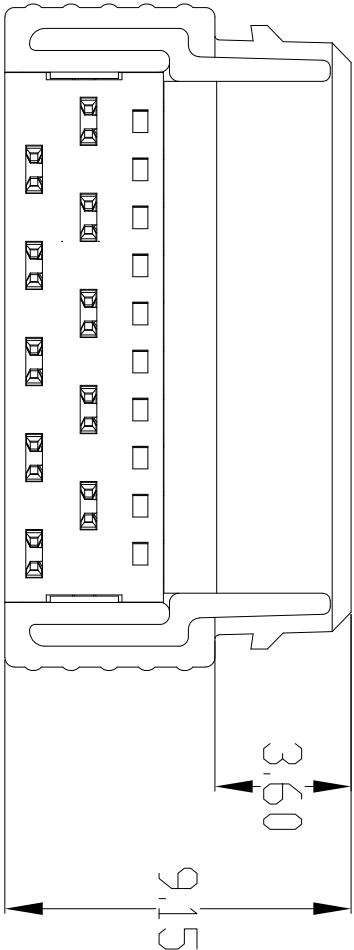


GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

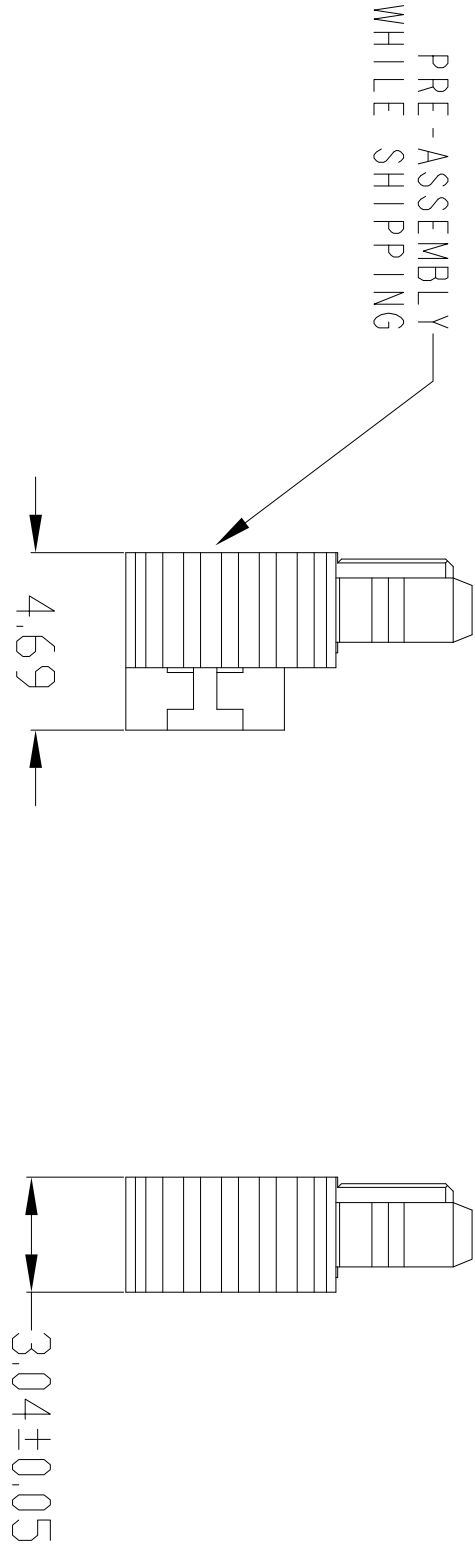

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

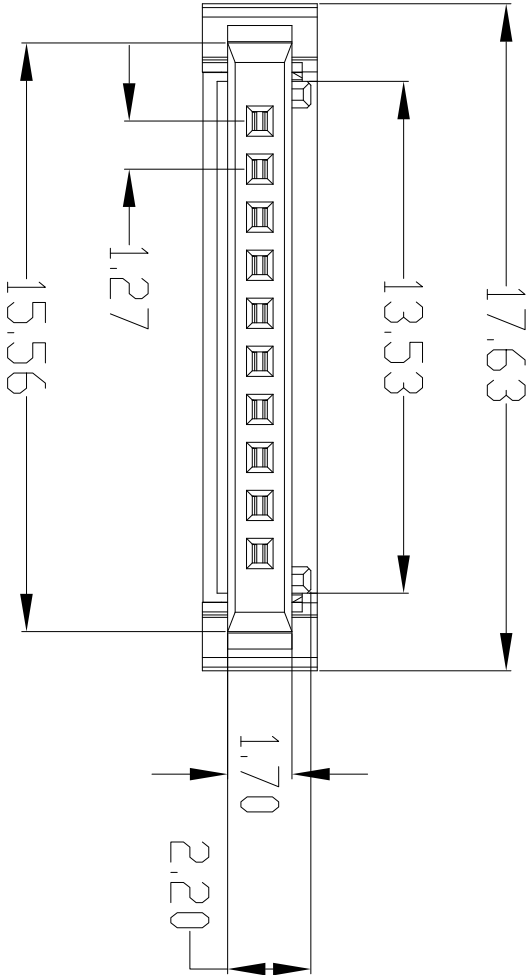

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: PA4T-GF30 TREMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING 30U",
OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC.		APPROVALS		DATE		SHANGHAI LANGSU ELECTRONICS CO., LTD.		Powerlite		U	
TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE		SEE NOTES 2		PREPARED BY JUSTIN LI		Jun-30-20		1.27mm Single Row Female 180C cable outlet		1.27mm Single Row Female 180C cable outlet			
DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		PROCESS SPEC.		ENGINEER IN CHARGE TYLER QIU		THIRD ANGLE PROJECTION		DESIGN MANAGER TYLER QIU		SIZE C		DOCUMENT NO. PL-FS10103	
LEGENDS: =FLAG NOTE CALL OUT =REFERENCE ONLY		--				SCALE:		REF.		SHEET 1 OF 1		REV. A	