
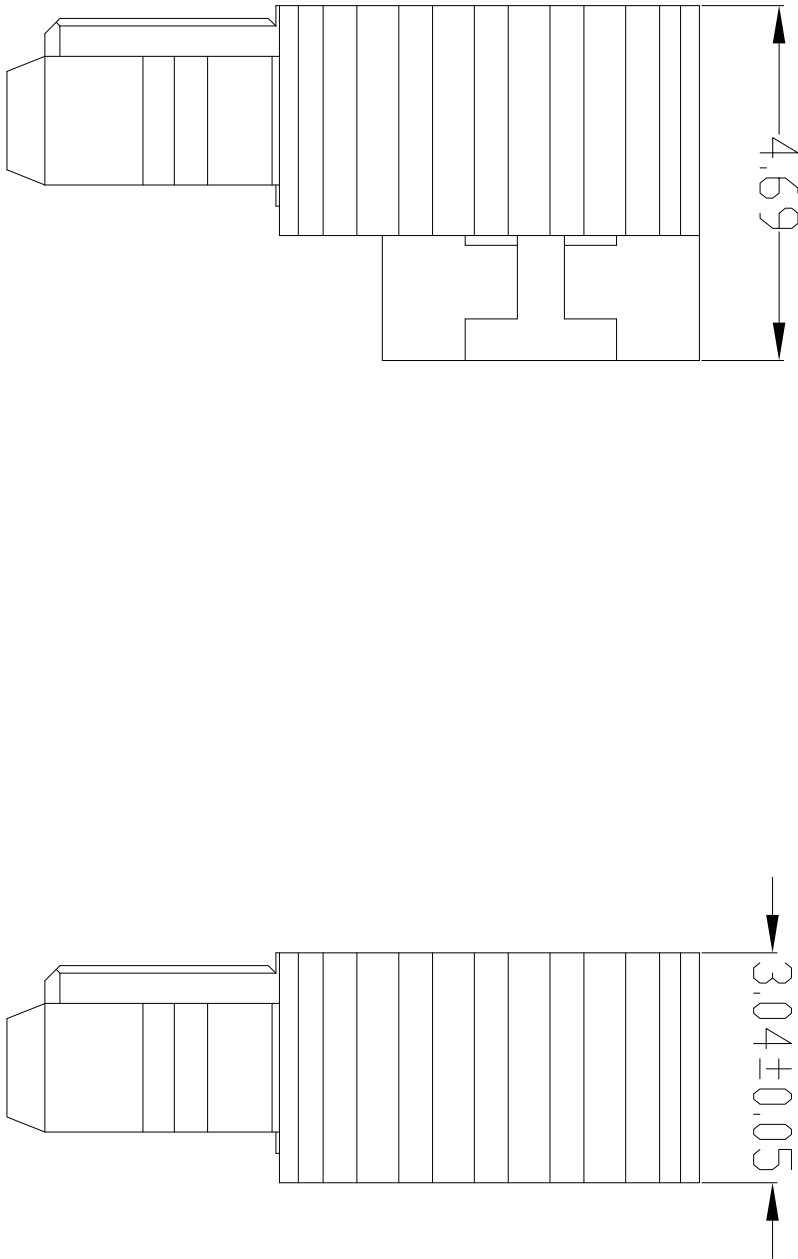


4

3


2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

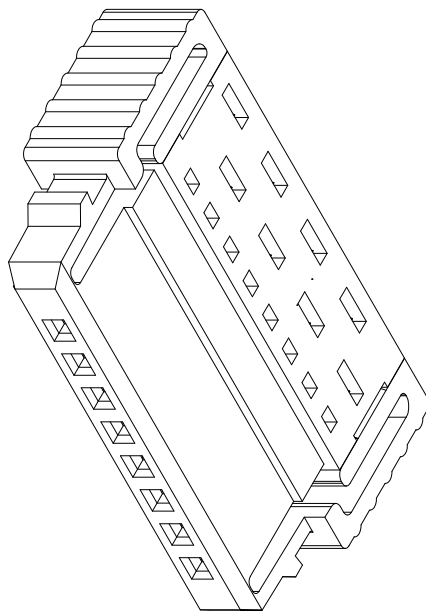

PRE-ASSEMBLY
WHILE SHIPPING

WIRE GUIDE PRESSED ON

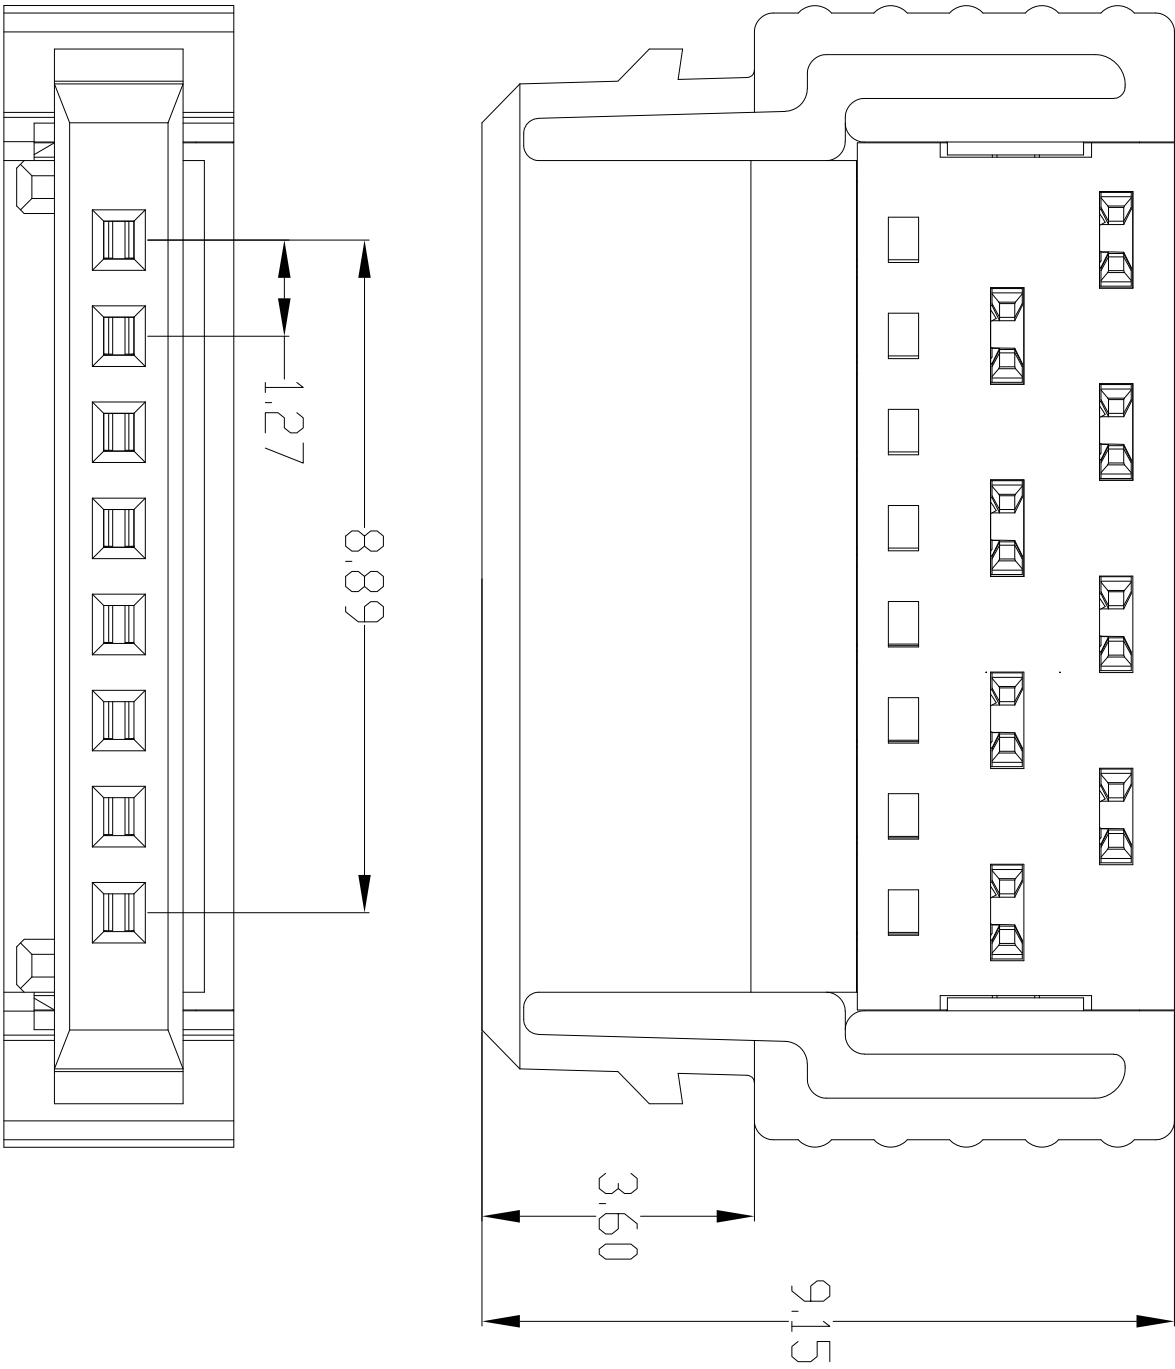


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4T-GF30 TREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		MATERIAL SPEC.		APPROVALS		上海良速电子有限公司 Powerlite 1.27mm Single Row 08pin Female 180° cable outlet U		
		SEE NOTES 2		PREPARED BY ENGINEER TYLER LI				
		PROCESS SPEC.		TYLER QIU				
		--		JUN-30-20				
				DESIGN MANAGER TYLER QIU				
				THIRD ANGLE PROJECTION				
LEGENDS:  = FLAG NOTE CALL OUT REFERENCE ONLY								
				SCALE: 2:1		SHEET 1 OF 1		
		SIZE		DOCUMENT NO.		PL-FS08101		REV
		C						A