
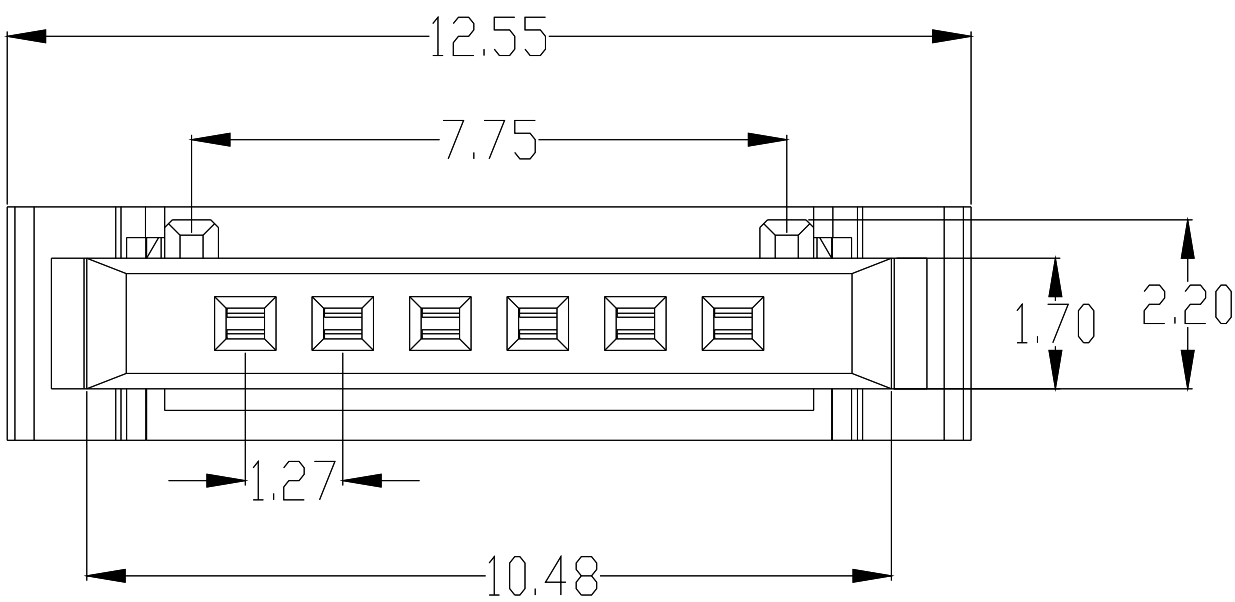




GENERAL TOLERANCE						SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	

CUSTOMER DRAWING



REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

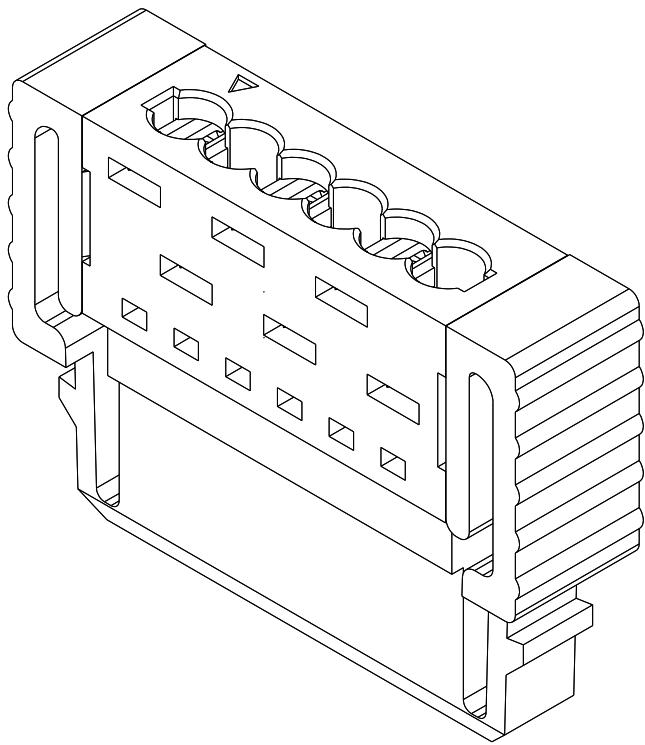

PRE-ASSEMBLY
WHILE SHIPPING

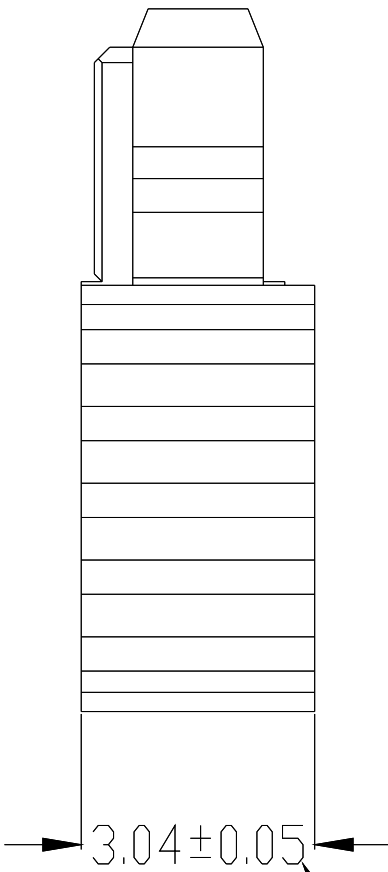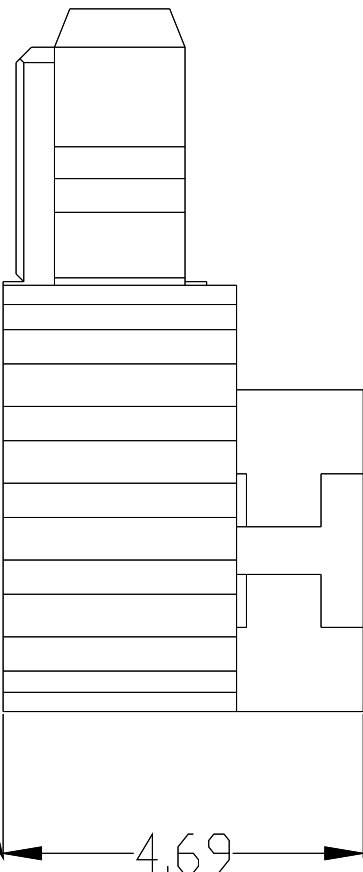

WIRE GUIDE PRESSED ON

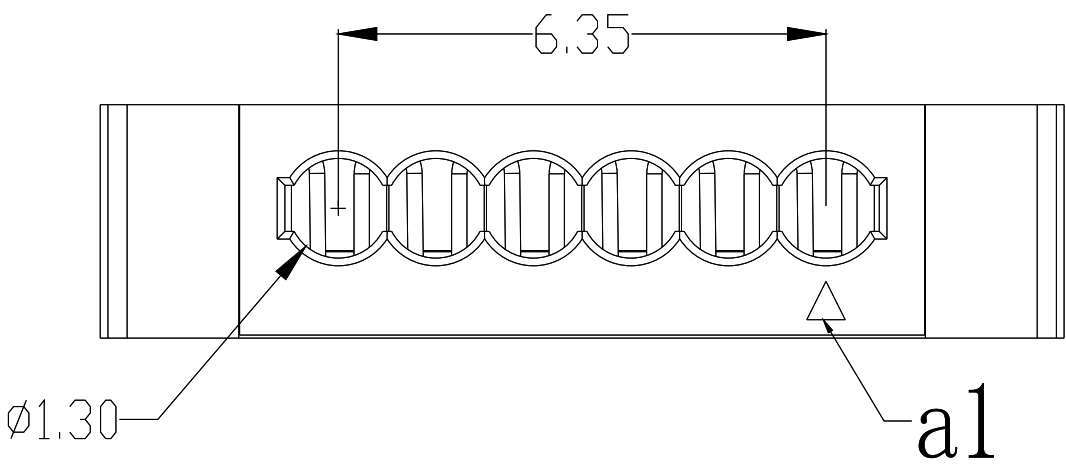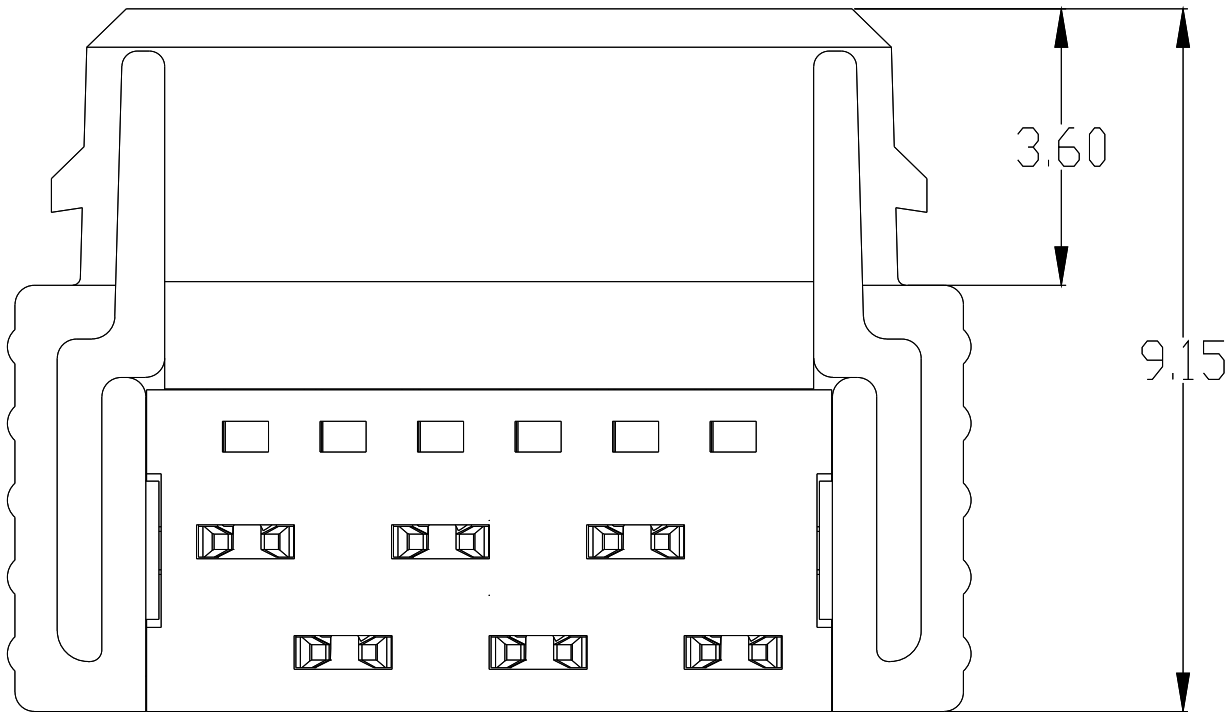

- NOTES:
- THE PRODUCTS ARE RoHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING:PA THREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM.& TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powerlite 1.27mm Single Row Female 180 cable outlet		
		SEE NOTES 2		PREPARED BY	JUSTIN LI	Jun-30-20			
				ENGINEER IN CHARGE	TYLER QIU				
				DESIGN MANAGER	TYLER QIU				
									DESIGN ACTIVITY GROUP
		PROCESS SPEC.		THIRD ANGLE PROJECTION		SIZE	DOCUMENT NO.	PL-FS06101	REV.
						C			A
						SCALE:		REF.	SHEET 1 OF 1