
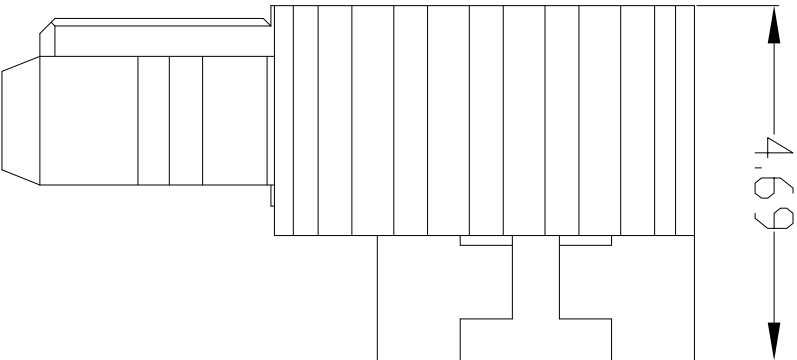


4


3

2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

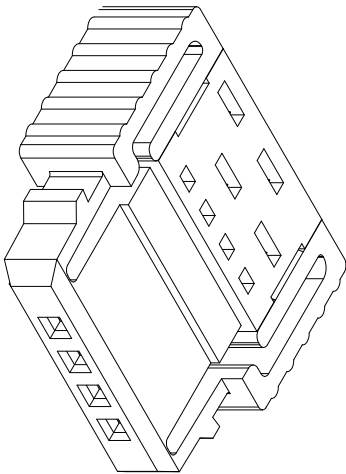


4.69

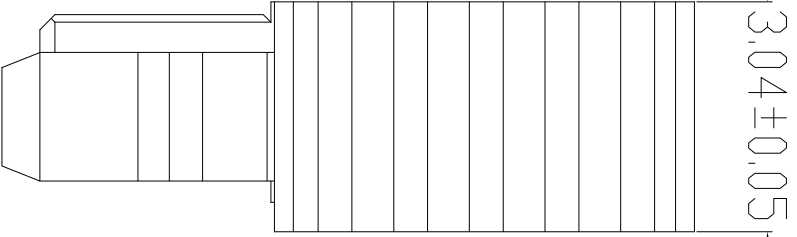

3.04±0.05

PRE-ASSEMBLY
WHILE SHIPPING


WIRE GUIDE PRESSED ON

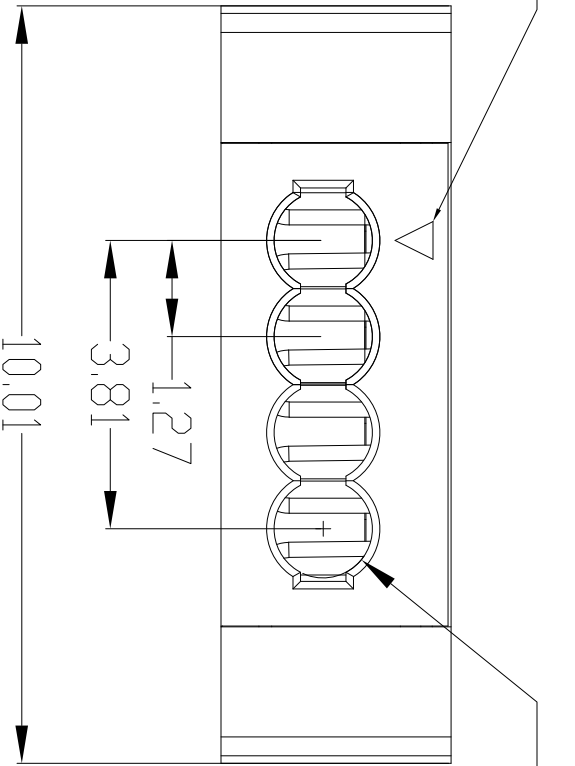

ø1

ø1.30

1.27
3.81
10.01

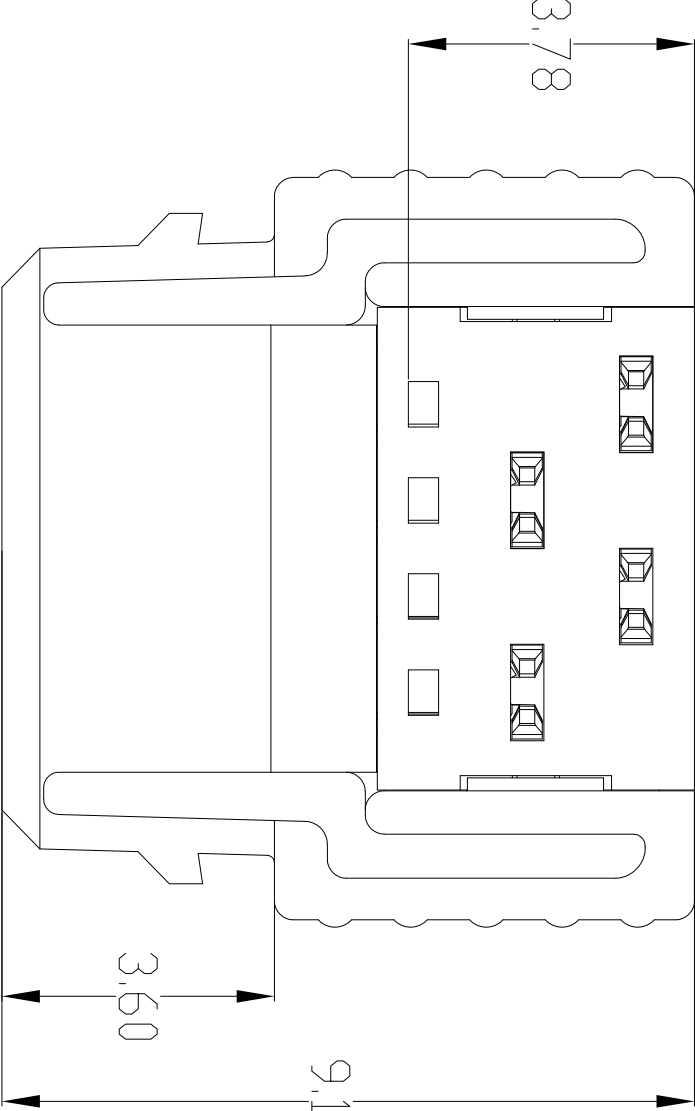


3.78

9.15

3.60

3.81
1.27

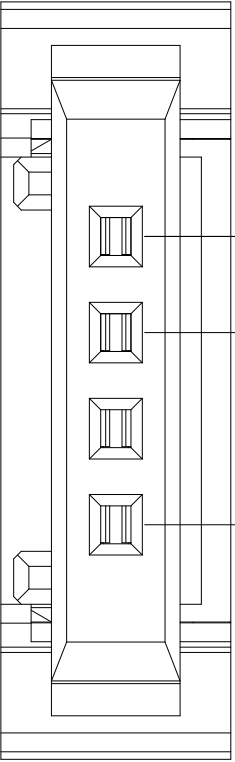


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: PA4T-GF30 THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE					
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				MATERIAL SPEC.		SEE NOTES 2		上海良速电子有限公司 Powerlite 1.27mm Single Row 04pin Female 180° cable outlet U									
				PROCESS SPEC.		--											
				THIRD ANGLE PROJECTION		DESIGN ACTIVITY GROUP								TYLER QIU		Jun-30-20	
				TYLER QIU		ENGINEER IN CHARGE								JUSTIN LI		PREPARED BY	
				APPROVALS		DATE											
SCALE: 2:1		DOCUMENT NO.		C		REF.		SHEET 1 OF 1		REV		A					