
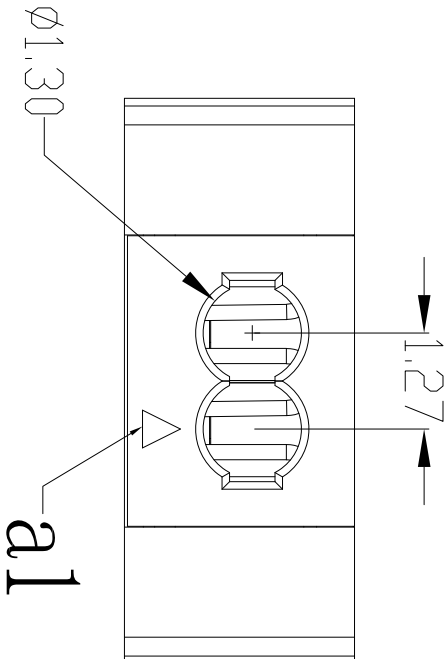
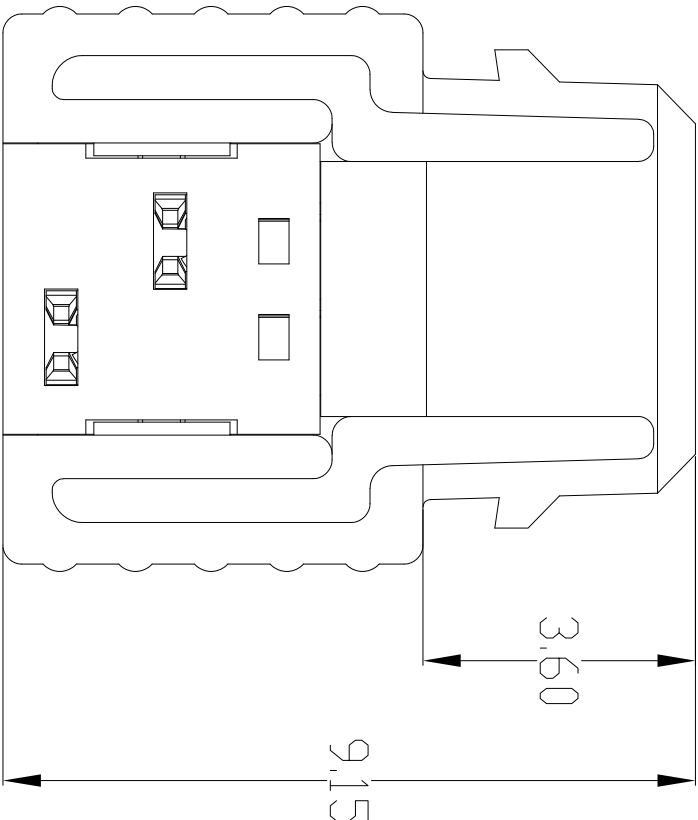
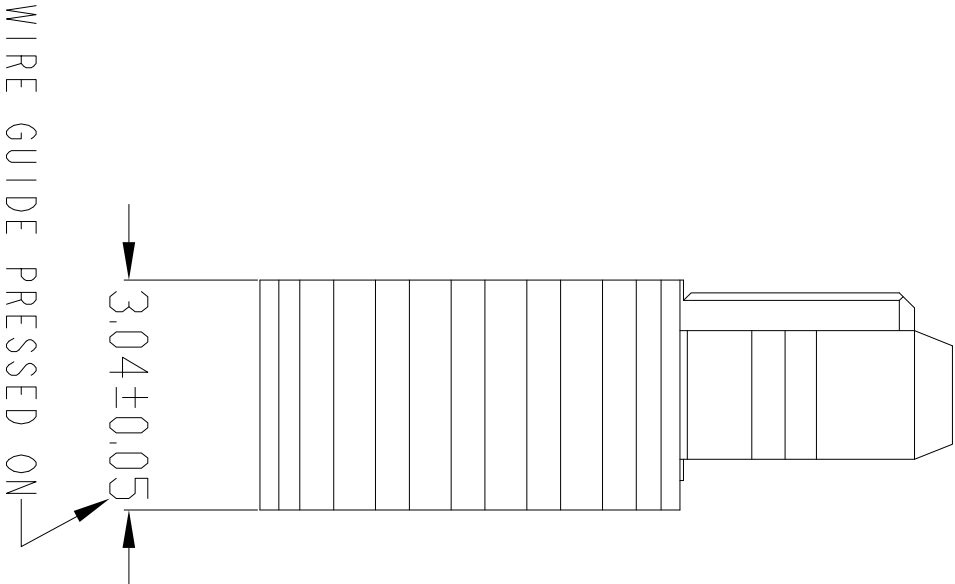
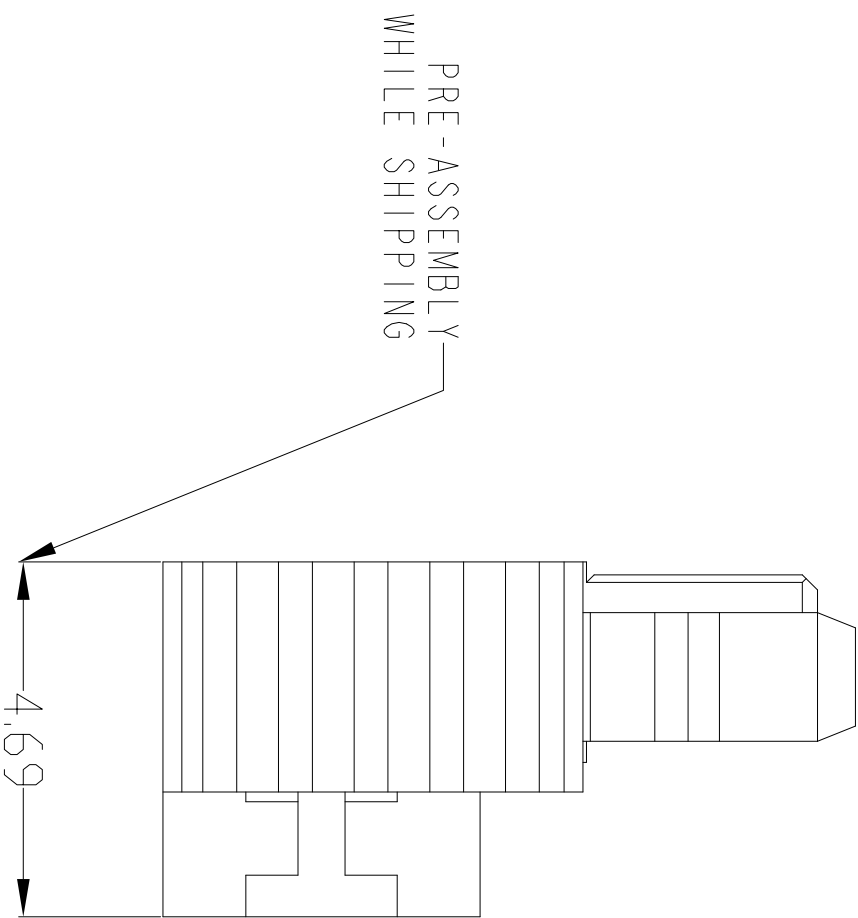
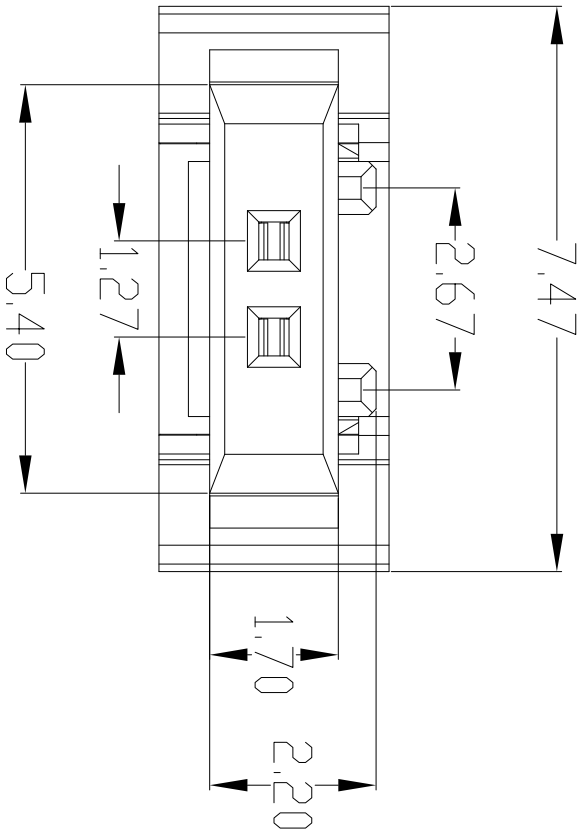


4

3

2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

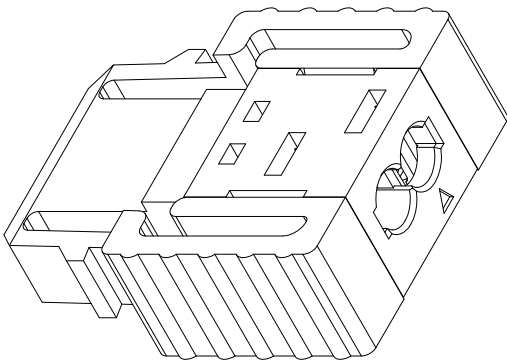

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
----------------------------	--	----------------	--	-----	-----	-------------	-------------	------

LINEAR DIMENSIONS ARE IN: **MILLIMETERS**

TOLERANCES:

ANGLES: ±2°

DEFAULT LINEAR TOLERANCES SEE TABLE

DIM. & TOL. PER ASME Y14.5M-1994;
DRM PER MIL-DTL-31000;

LEGENDS:

=FLAG NOTE CALL OUT
REFERENCE ONLY

MATERIAL SPEC.

SEE NOTES 2

APPROVALS

PREPARED BY JUSTIN LI

ENGINEER IN CHARGE TYLER QIU

DESIGN MANAGER TYLER QIU

DESIGN ACTIVITY GROUP

THIRD ANGLE PROJECTION

上海良速电子有限公司

Powerlite

1.27mm Single Row Female 180° cable outlet

SIZE **C** DOCUMENT NO **PL-FS02101** REV **A**

SCALE: REF. SHEET 1 OF 1

NOTES:

1. THE PRODUCTS ARE ROHS COMPLIANCE.

2. MATERIAL SPEC:

HOUSING: PA THERMOPLASTIC, UL94 V-0, BLACK COLOR.

CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

4

3

2

1