
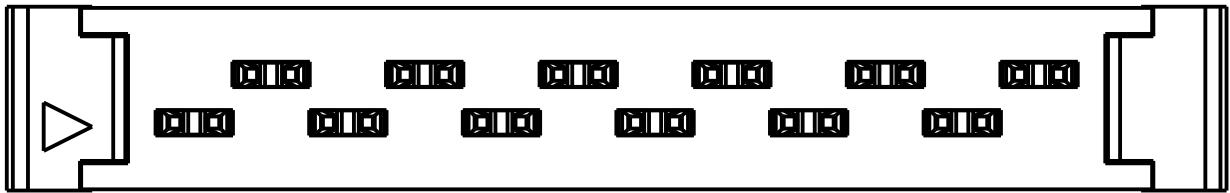
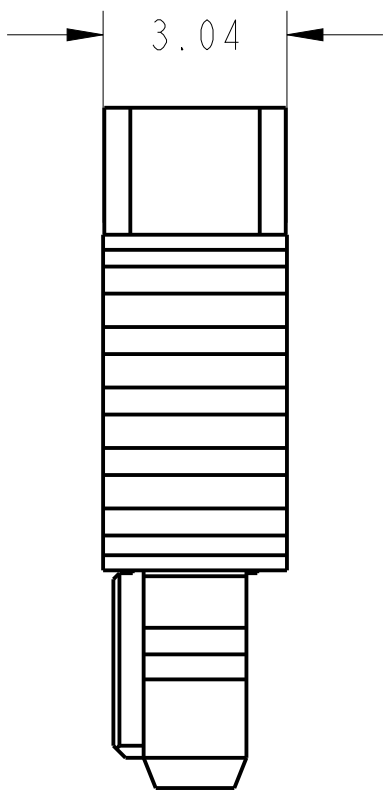



GENERAL TOLERANCE						SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	

CUSTOMER DRAWING


REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-07-13

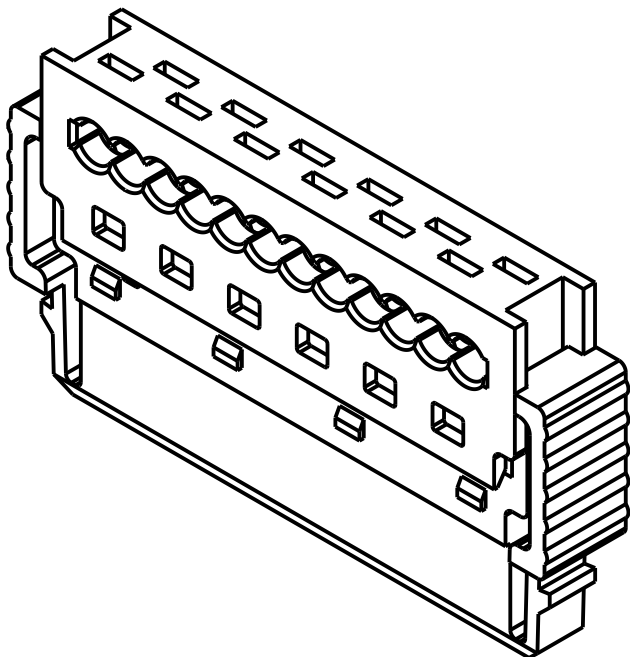

PRE-ASSEMBLY
WHILE SHIPPING

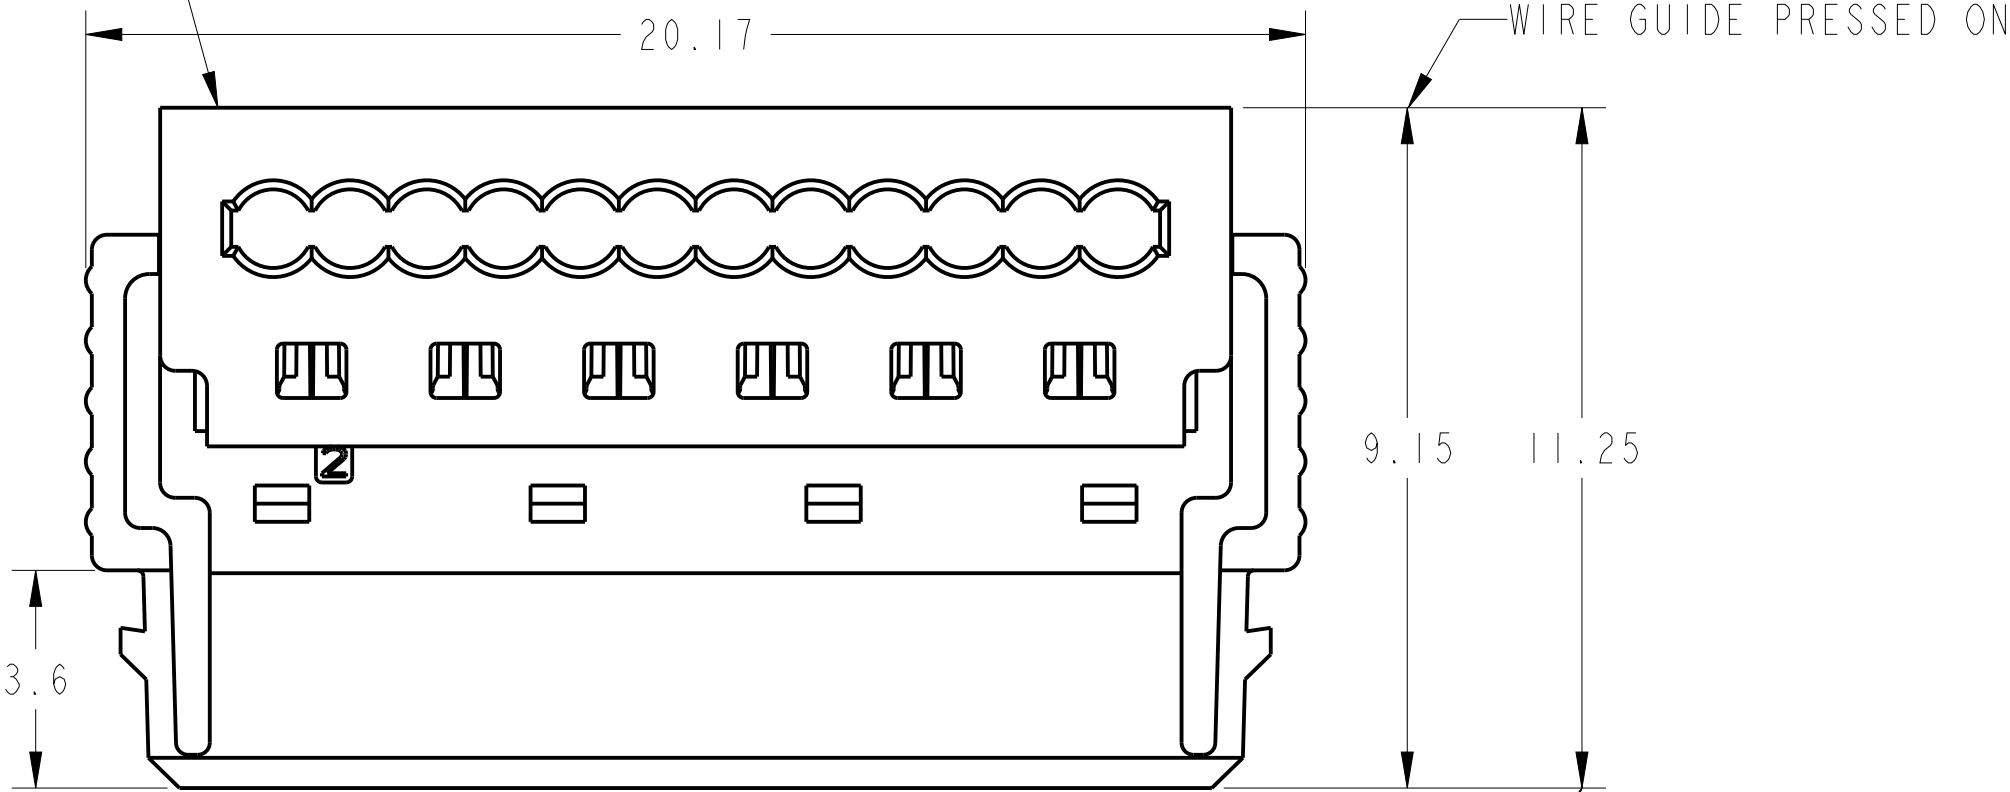


WIRE GUIDE LOSSE MOUNTED (AT TIME OF SUPPLY)

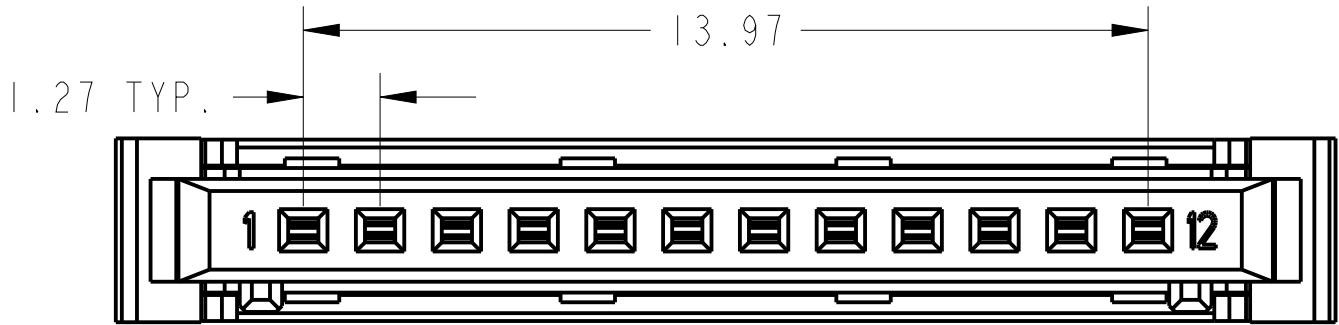

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:PA4TTHREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE		
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE ----- DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		PARTS LIST						
		SEE NOTES 2		APPROVALS		DATE		上海良速电子有限公司 Powerlite 1.27mm Single Row 12pin Female 90 ° cable outlet		
				PREPARED BY JUSTIN LI		Jul-14-20				
				ENGINEER IN CHARGE TYLER QIU						
				DESIGN MANAGER TYLER QIU						
				DESIGN ACTIVITY GROUP						
		PROCESS SPEC.		THIRD ANGLE PROJECTION		SIZE		DOCUMENT NO.		PL-FA12101
				C						A
				SCALE: 8.0		REF.		SHEET 1 OF 1		