




GENERAL TOLERANCE						SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-07-13

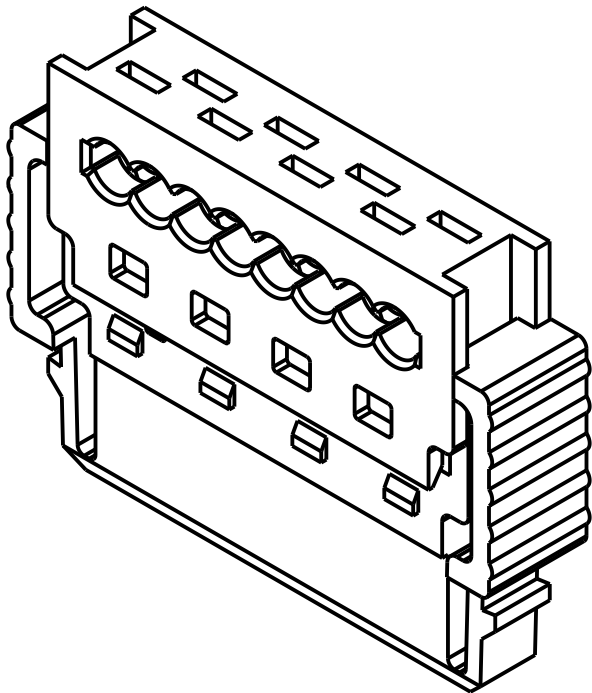


PRE-ASSEMBLY
WHILE SHIPPING

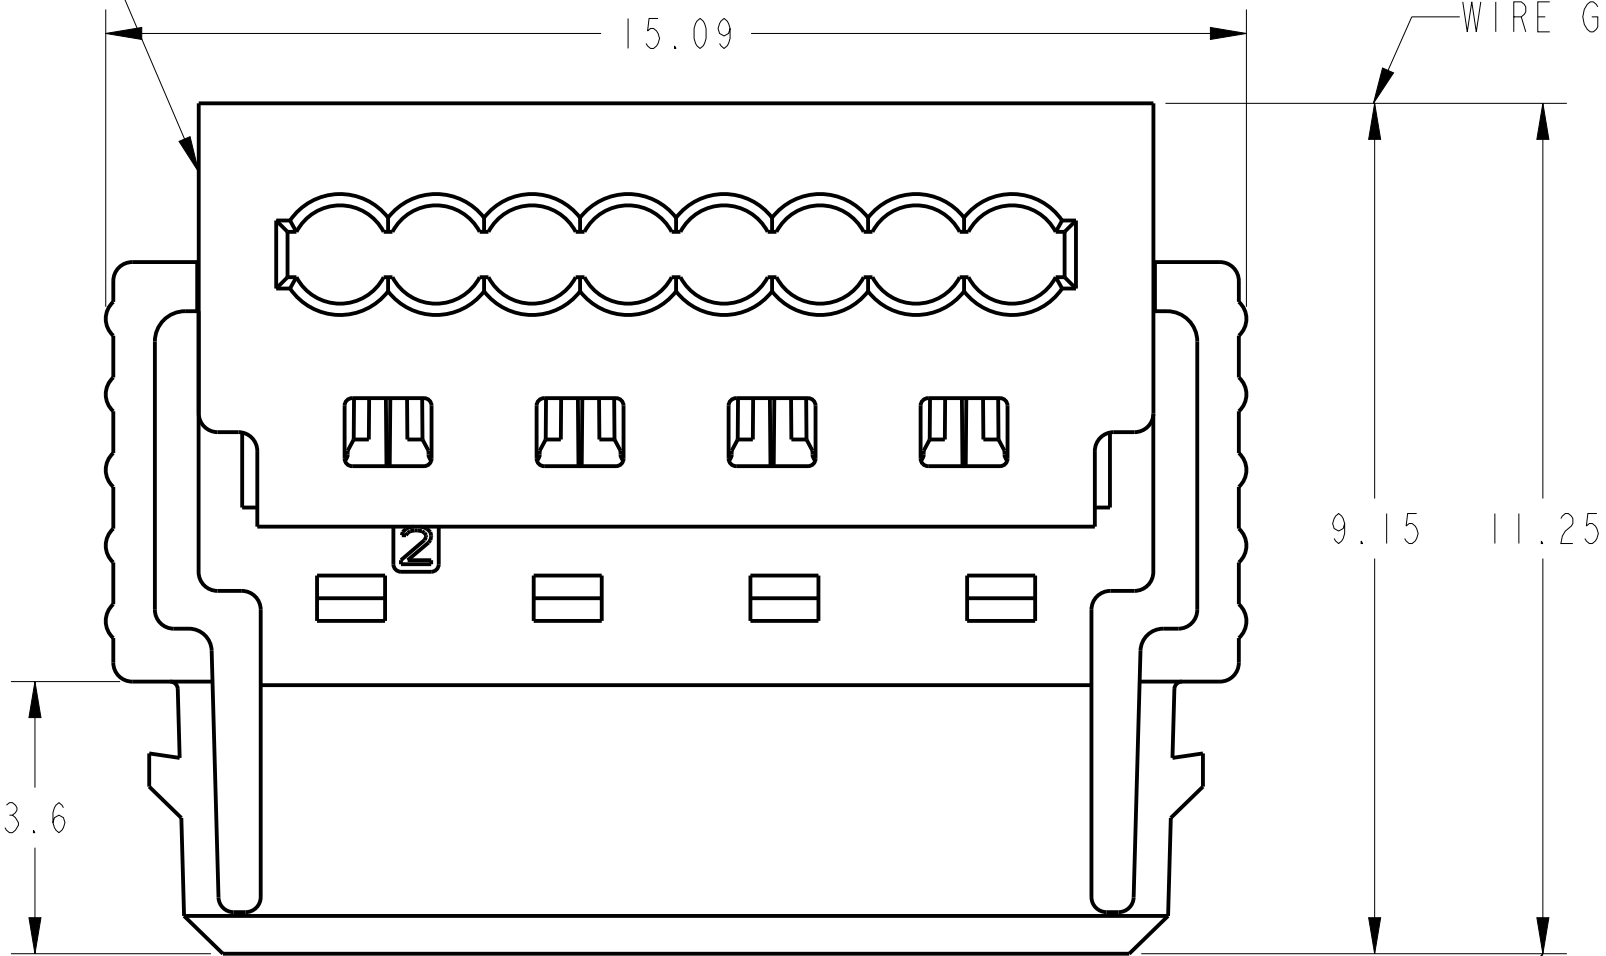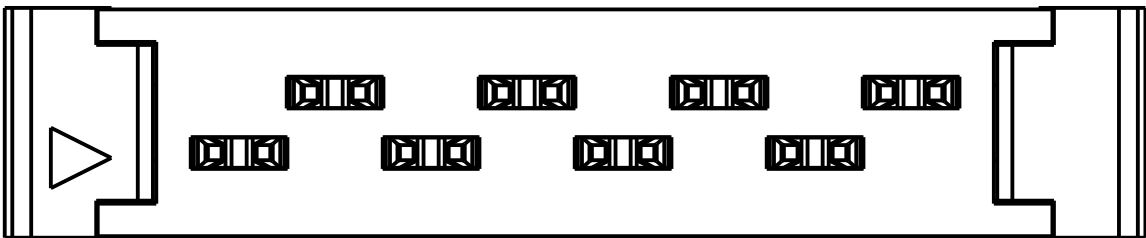

WIRE GUIDE PRESSED ON

WIRE GUIDE LOSSE MOUNTED (AT TIME OF SUPPLY)

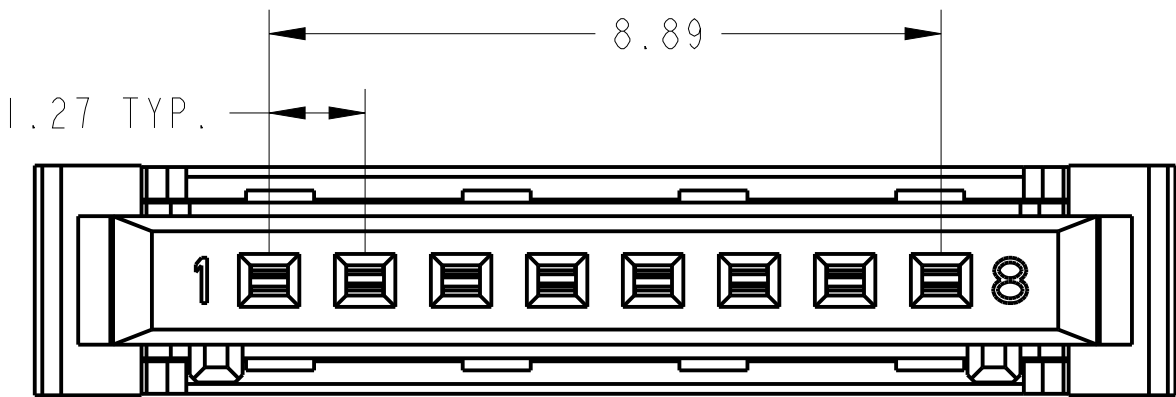

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: PA4TTHREMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM.& TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: △=FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.	PARTS LIST				
		SEE NOTES 2	APPROVALS				
		PROCESS SPEC.	THIRD ANGLE PROJECTION				
			PREPARED BY JUSTIN LI ENGINEER IN CHARGE DESIGN MANAGER TYLER QIU DESIGN ACTIVITY GROUP	DATE Jul-13-20	上海良速电子有限公司 Powerlite 1.27mm Single Row 8pin Female 90° cable outlet		
					SIZE C	DOCUMENT NO. PL-FA08101	REV. A
					SCALE: 10.0	REF.	SHEET 1 OF 1