






GENERAL TOLERANCE

DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING

REVISIONS

REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-07-13

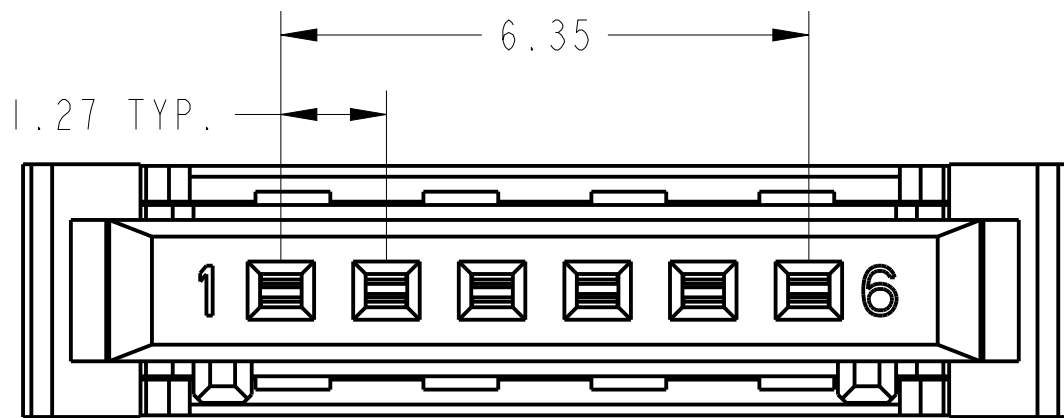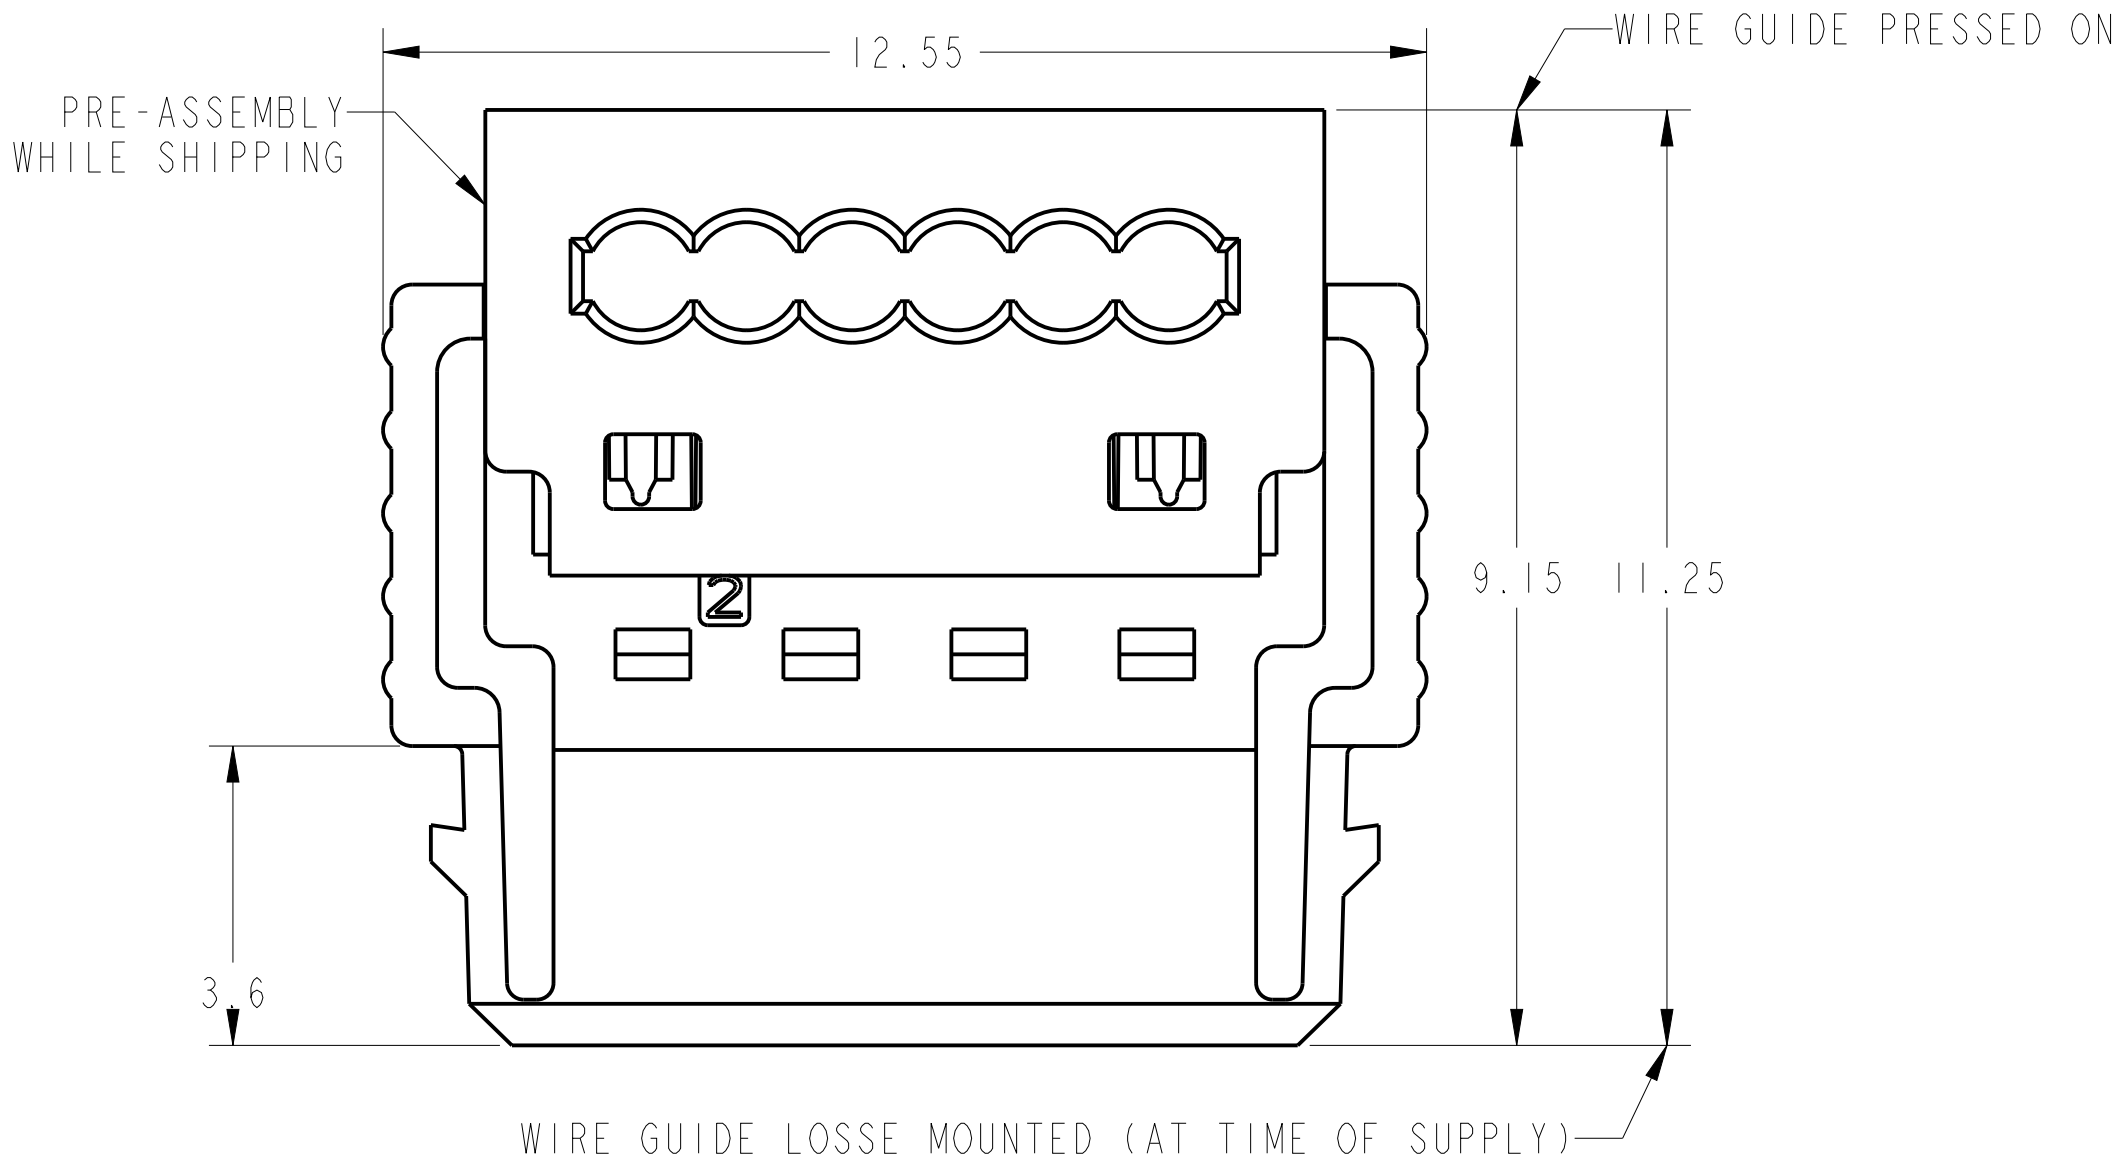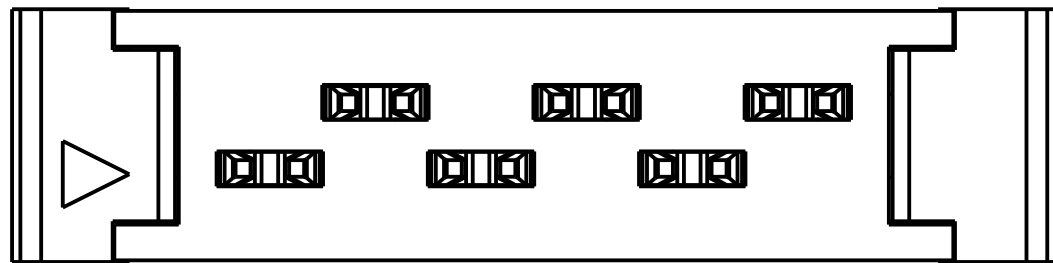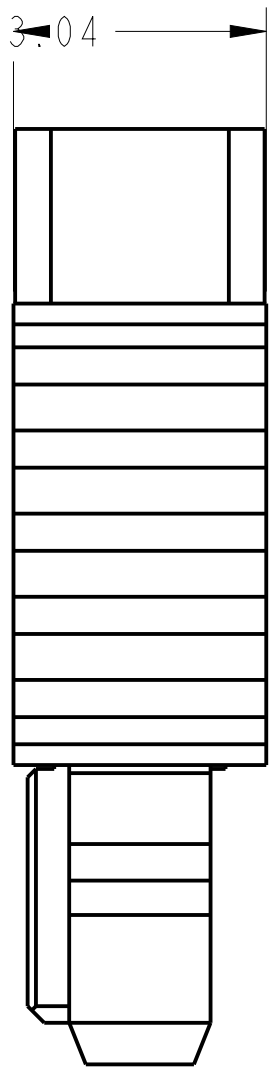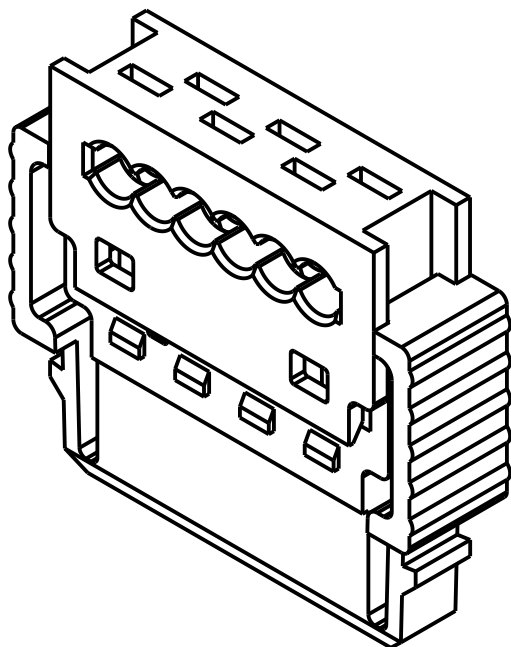

NOTES:

- THE PRODUCTS ARE RoHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: PA4TTHREMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED	SPECIFICATIONS	POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: △ = FLAG NOTE CALL OUT REFERENCE ONLY	MATERIAL SPEC.	APPROVALS				
	SEE NOTES 2	DATE				
	PROCESS SPEC.	THIRD ANGLE PROJECTION				
	--	PAPTS LIST				
		上海良速电子有限公司				
		Powerlite		1.27mm Single Row 6pin Female 90° cable outlet6		
		SIZE	DOCUMENT NO.	PL-FA06101		REV.
		C				A
		SCALE: 1:1.0		SHEET 1 OF 1		