
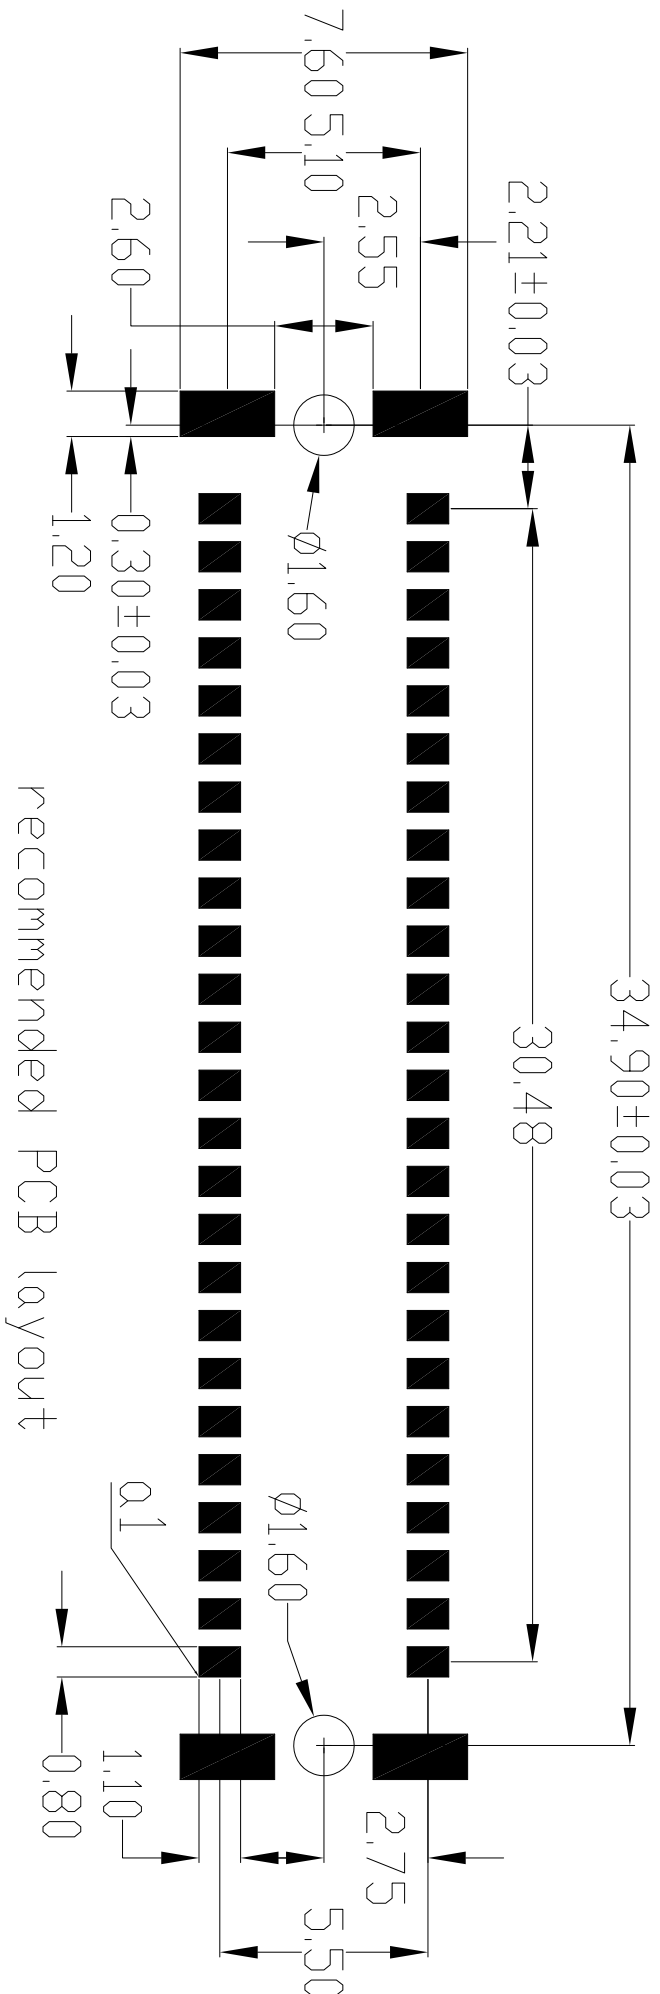
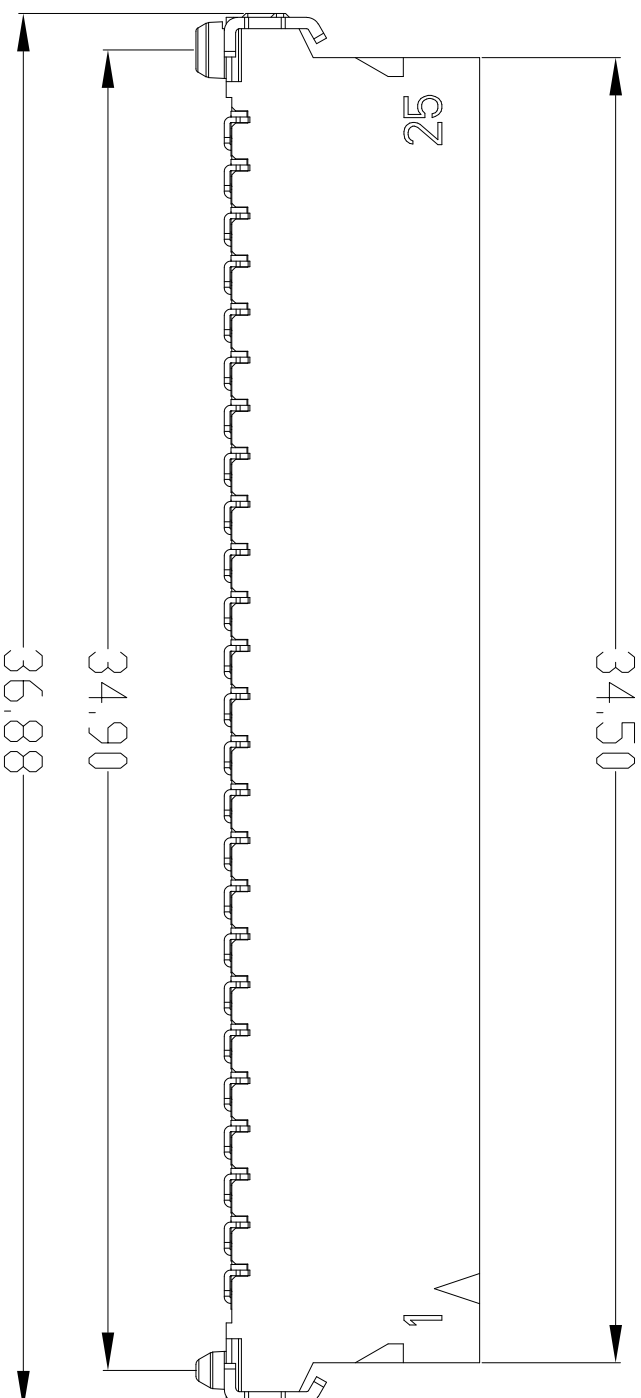
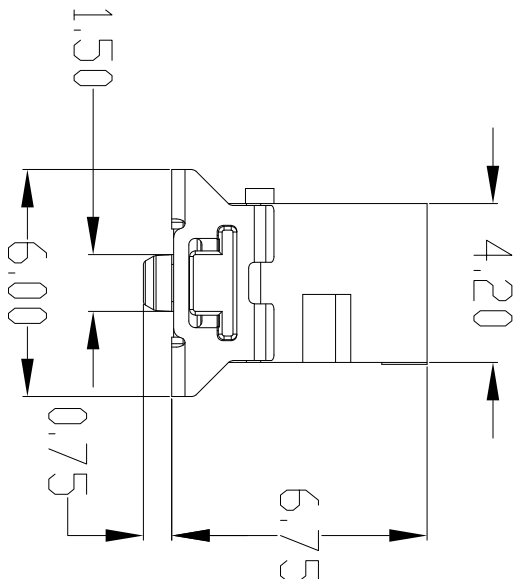
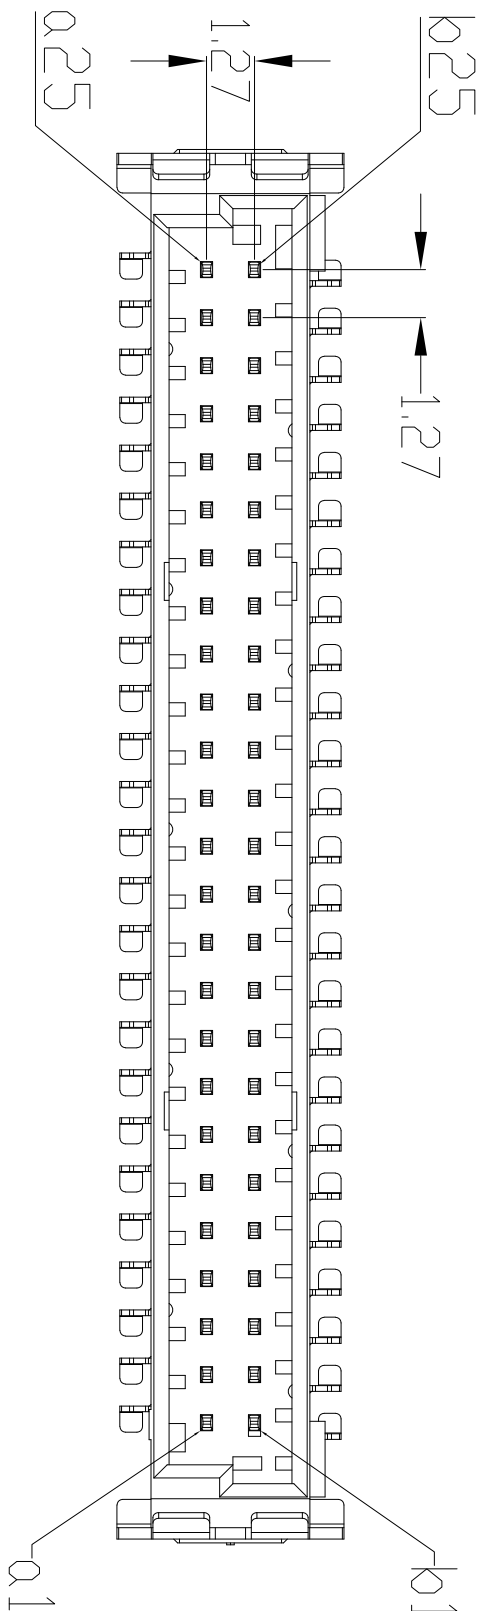


GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

B	Drawing Template update	May 28 2021
---	-------------------------	-------------

CUSTOMER DRAWING

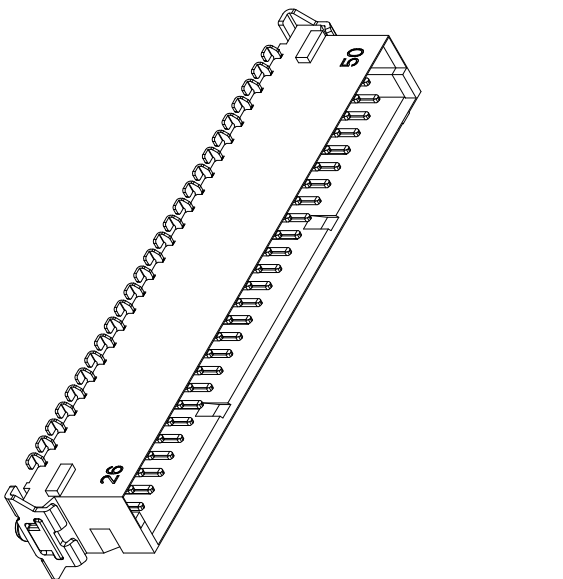

recommended PCB layout

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS				MATERIAL SPEC.		上海良速电子有限公司 Singnalite 1.27mm dual Row 50pin V Male SMT Connector U			
TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE				SEE NOTES 2					
DIN. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				PROCESS SPEC.					
LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY				--					
APPROVALS PREPARED BY JUSTIN LI ENGINEER IN CHARGE TYLER QIU DESIGN MANAGER TYLER QIU DESIGN ACTIVITY GROUP 2021/9/28				THIRD ANGLE PROJECTION		SCALE: 1:1 REF. SHEET 1 OF 1			
				SIZE					
				DOCUMENT NO.					
				REV					
SL-MV50101				B					