
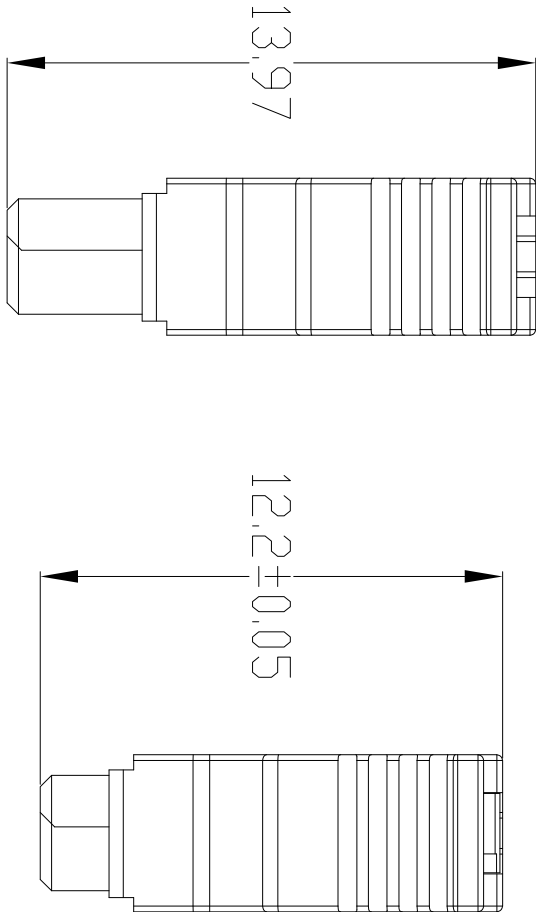
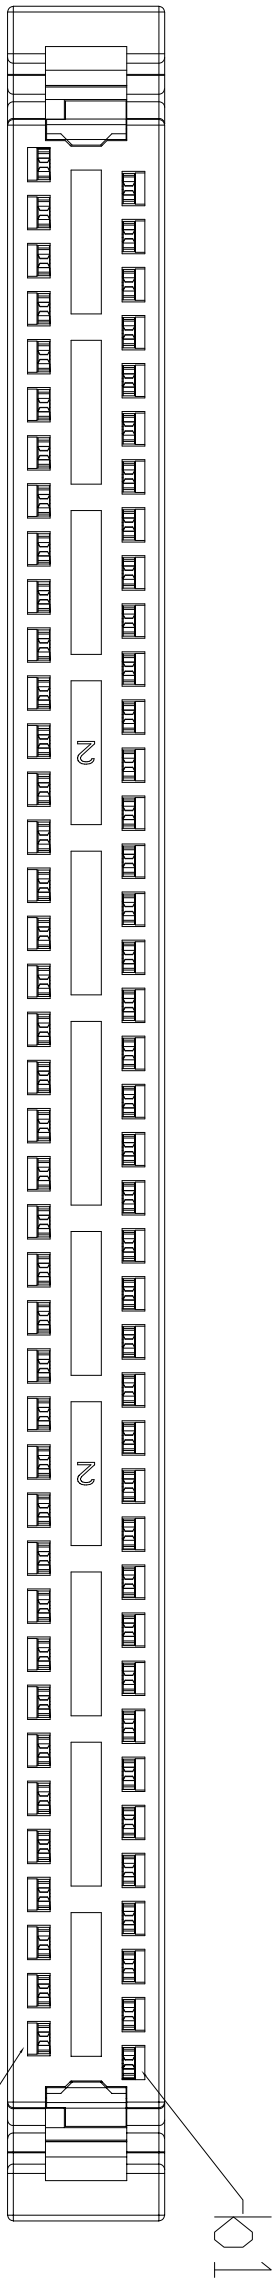


4



3

2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

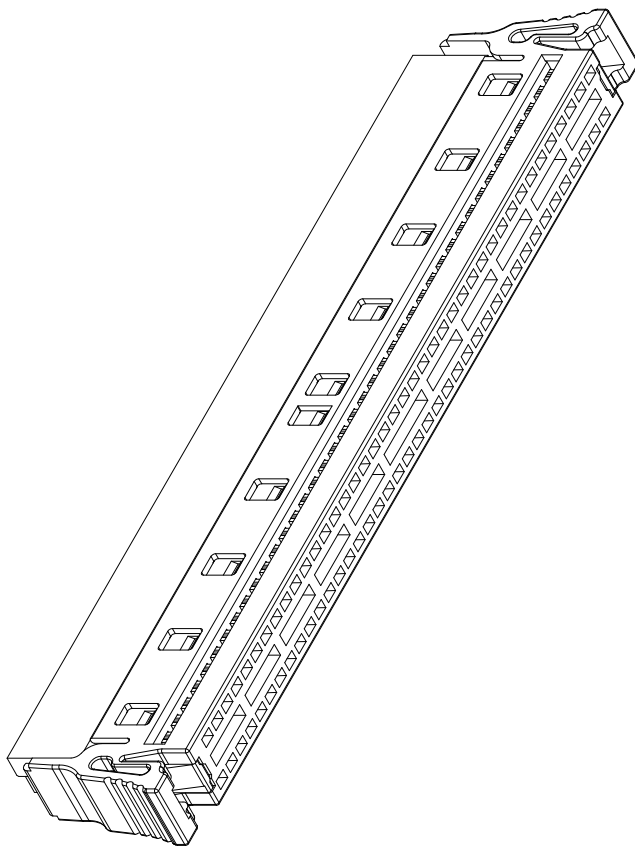


Wire guide initial state Wire guide pressed on

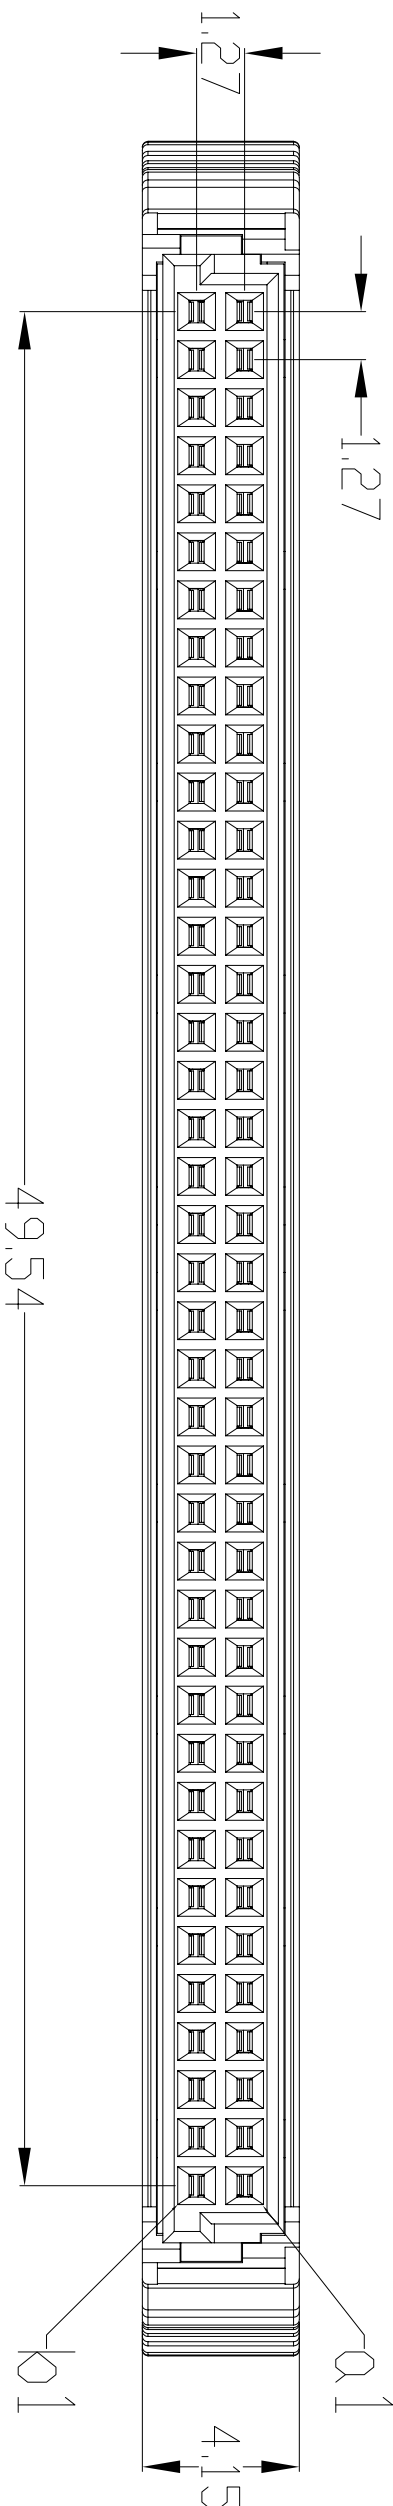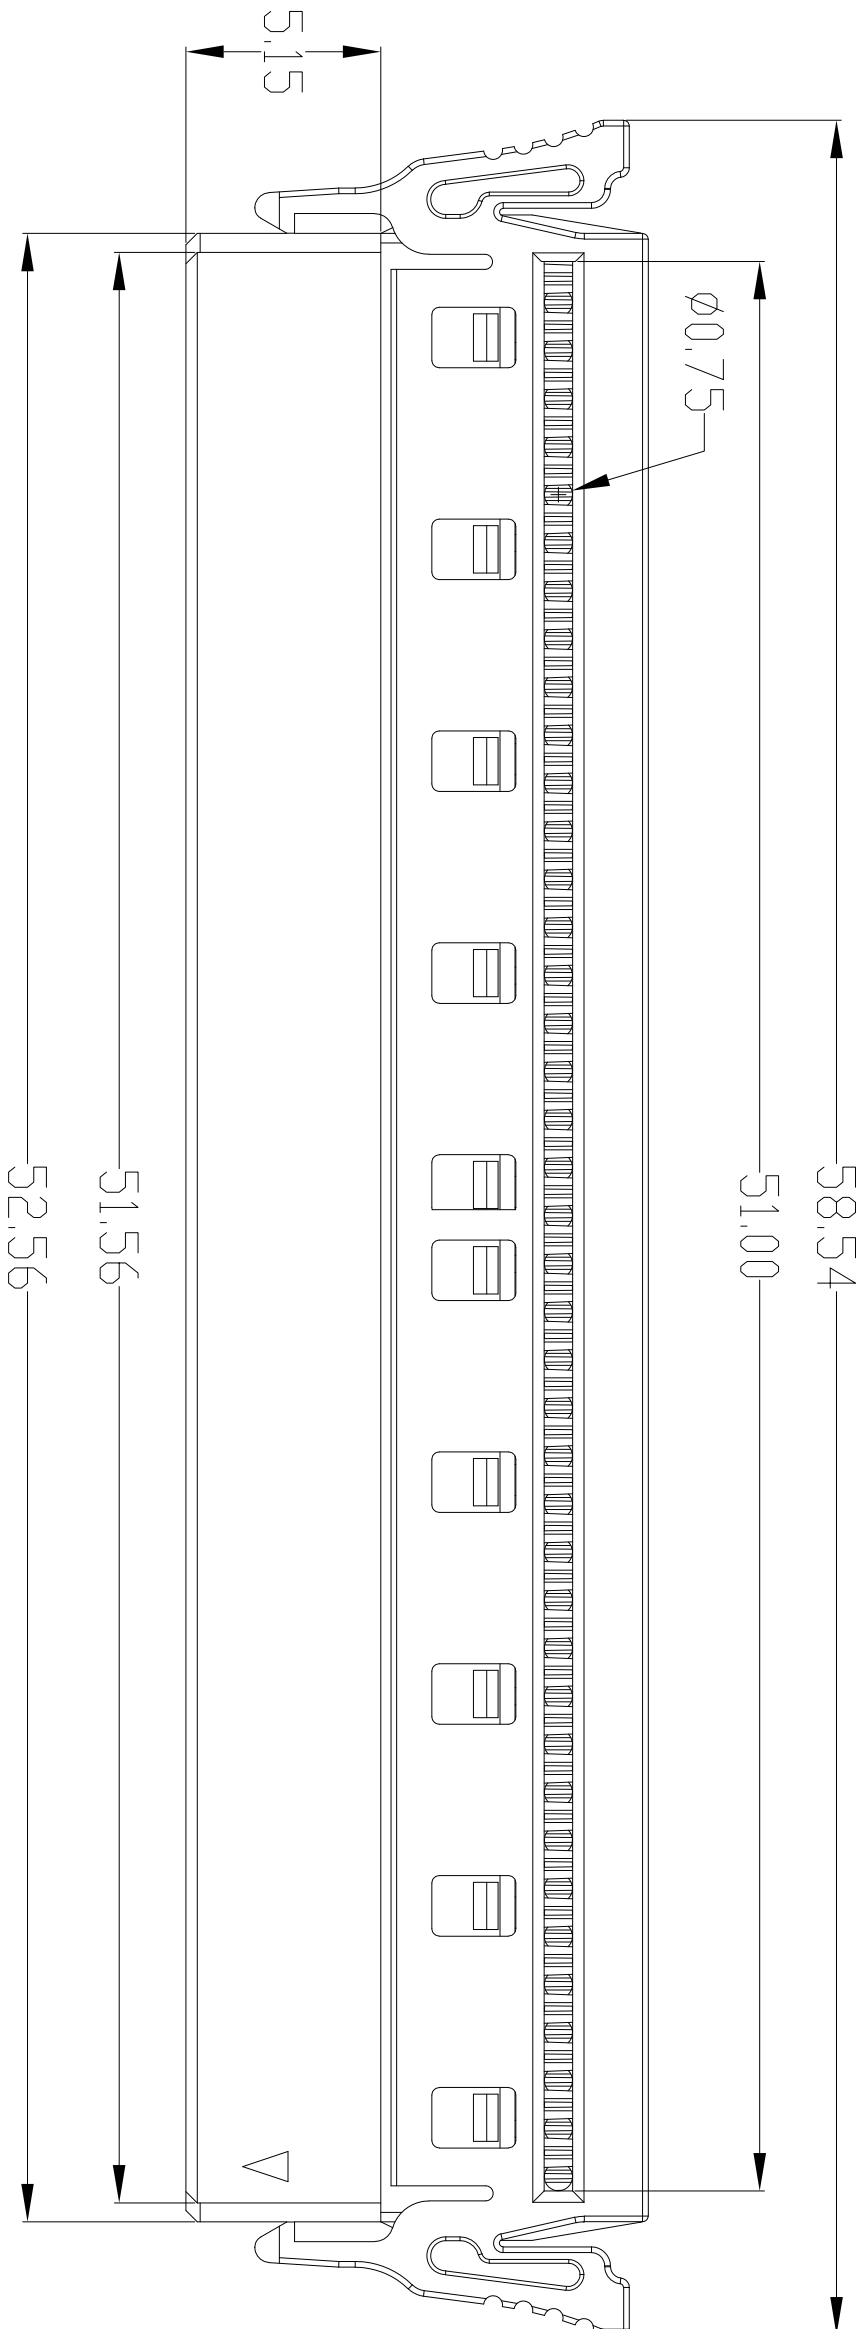

REVISIONS		
REV	DESCRIPTION	DATE
A	First releas	Dec 30 2020
B	Drawing Templet update	May 28 2021

CUSTOMER DRAWING

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		上海良速电子有限公司 Singnalite 1.27mm dual Row 80pin RA Female IDC Connector U						
		SEE NOTES 2								
		PROCESS SPEC.								
		--								
		THIRD ANGLE PROJECTION								
APPROVALS		DATE								
PREPARED BY		JUSTIN LI								
ENGINEER IN CHARGE		TYLER QIU		2020/5/28						
DESIGN MANAGER		TYLER QIU								
DESIGN ACTIVITY GROUP										
										
SIZE	DOCUMENT NO.	REF.								
C	SL-FA80101	B								
SCALE: 1:1	SHEET 1 OF 1									

A

B

C

4

3

2

1