
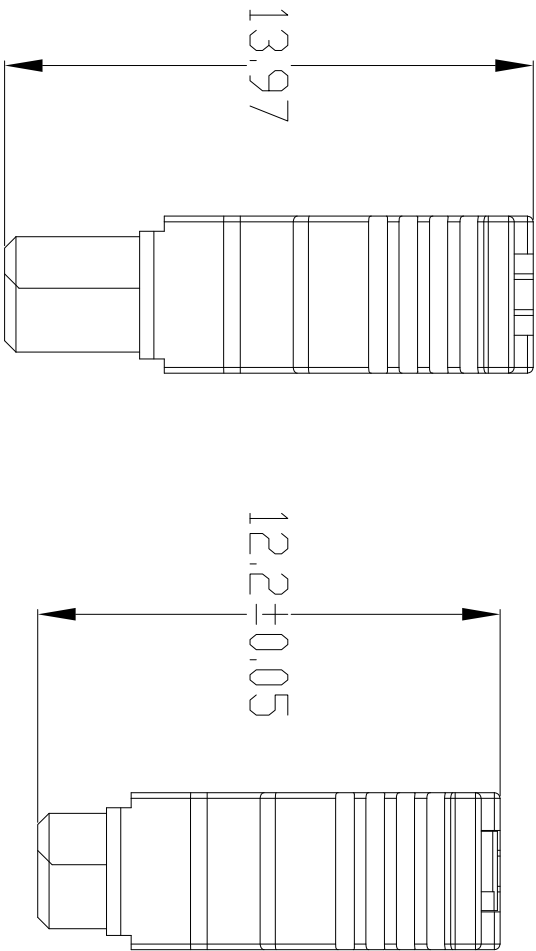


4




3

2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

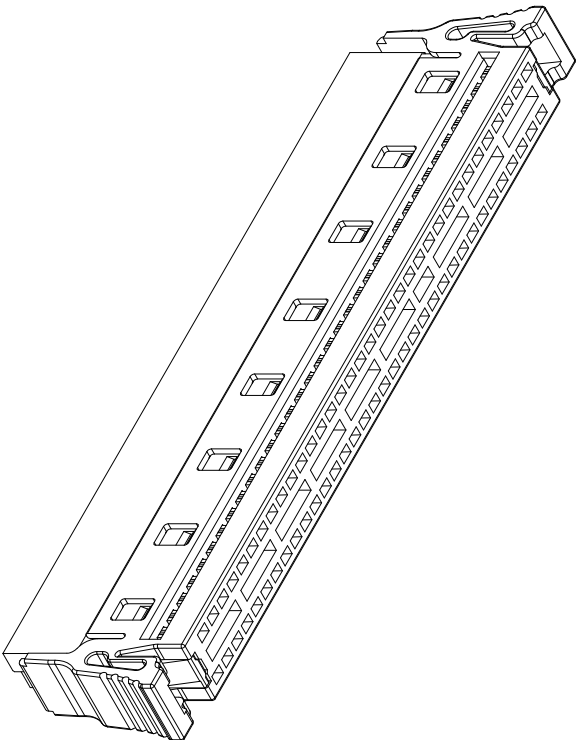

Wire guide initial state Wire guide pressed on

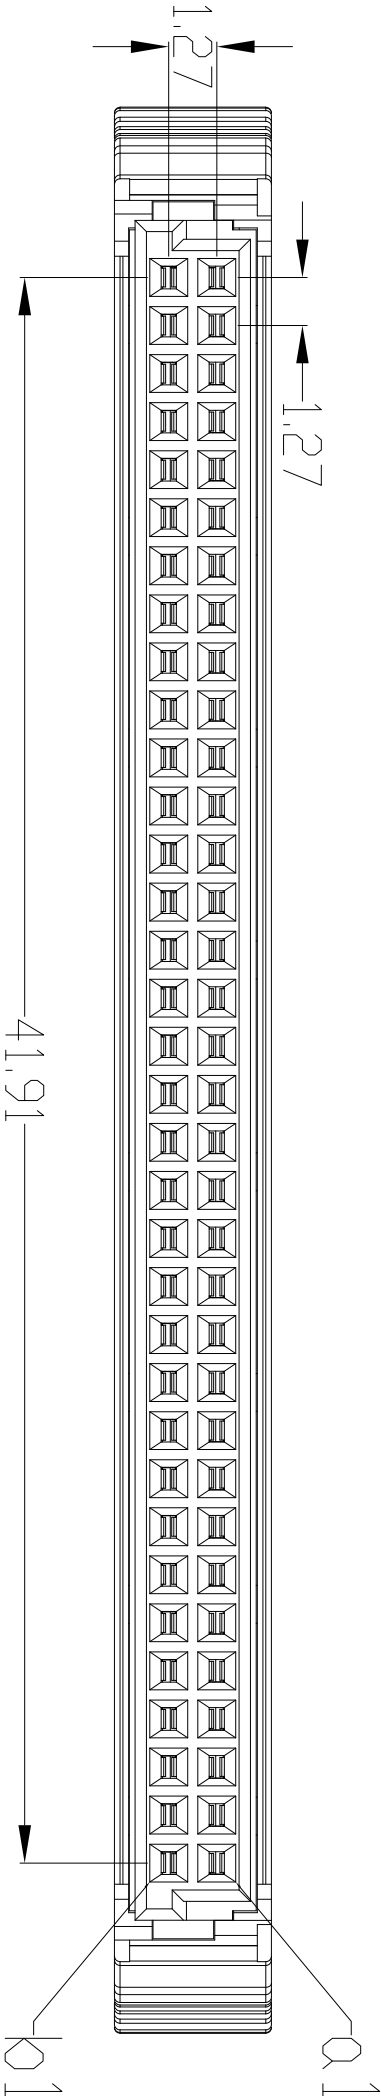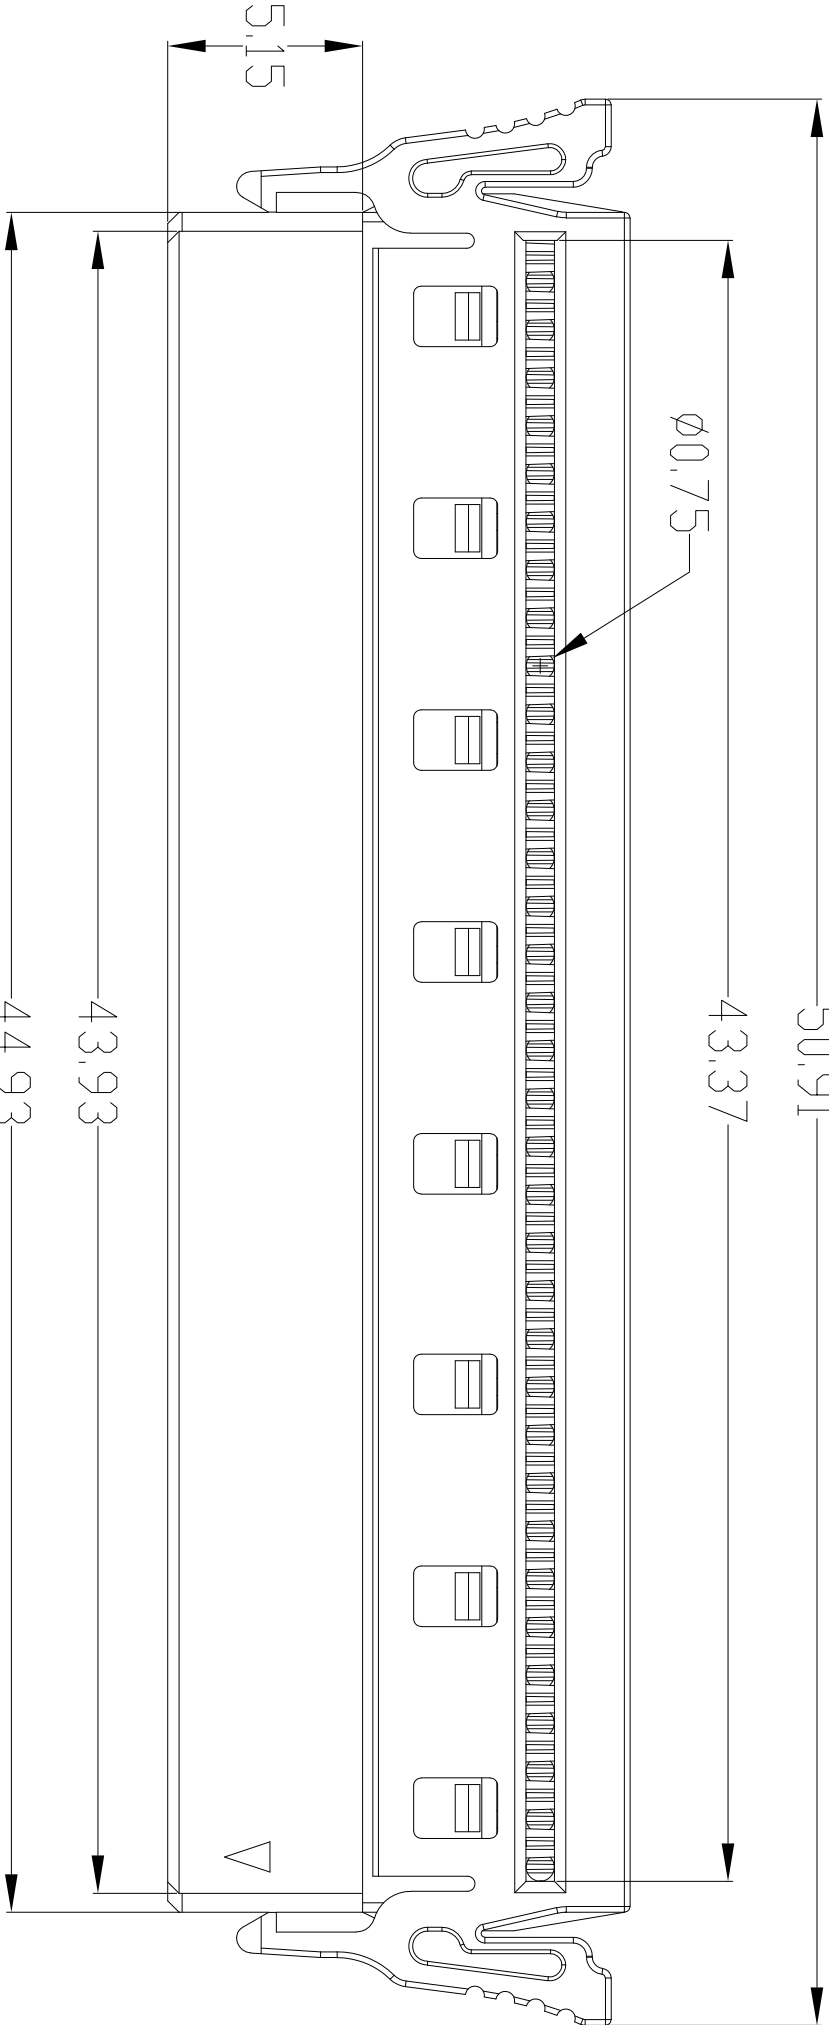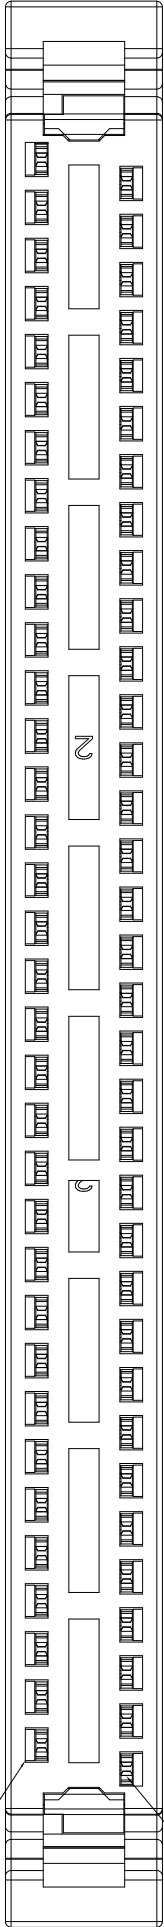

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First releas	Dec 30 2020
B	Drawing Templet update	May 28 2021

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				MATERIAL SPEC.		上海良速电子有限公司 Singnalite 1.27mm dual Row 68pin RA Female IDC Connector U				
				SEE NOTES 2						
				APPROVALS						
				PREPARED BY						
				ENGINEER IN CHARGE						
		TYLER LI		DATE						
		TYLER QIU		2020/5/28						
		DESIGN MANAGER		TYLER QIU						
		DESIGN ACTIVITY GROUP								
PROCESS SPEC.				THIRD ANGLE PROJECTION						
--										

A

B

C

D

4

3

2

1