
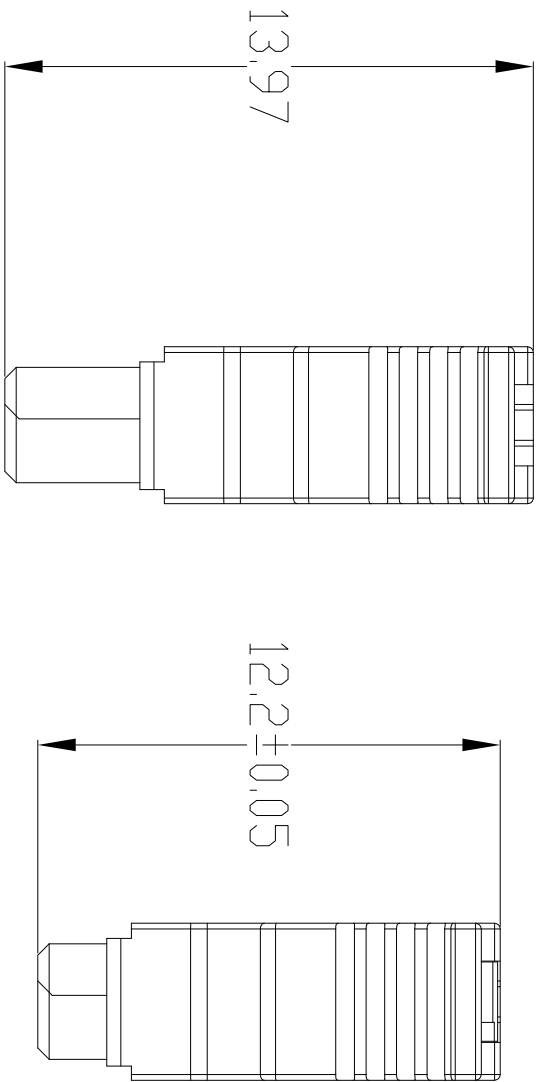





GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

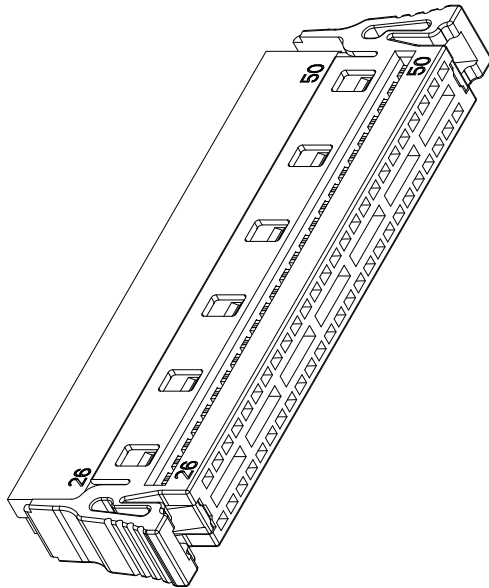

Wire guide initial state Wire guide pressed on

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First releas	Dec 30 2020
B	Drawing Templet update	May 28 2021

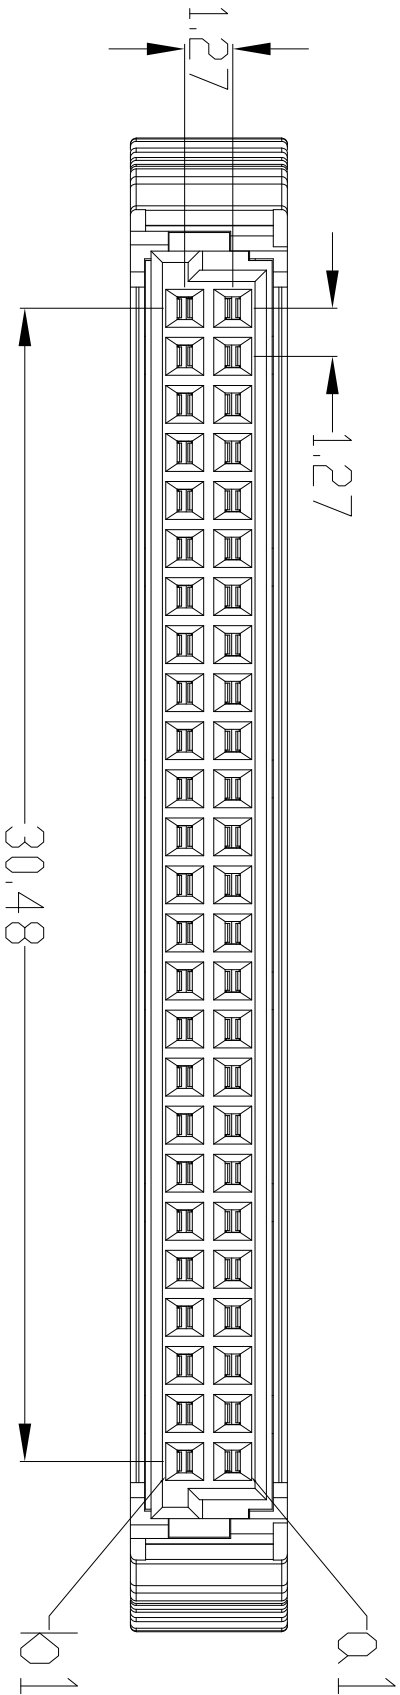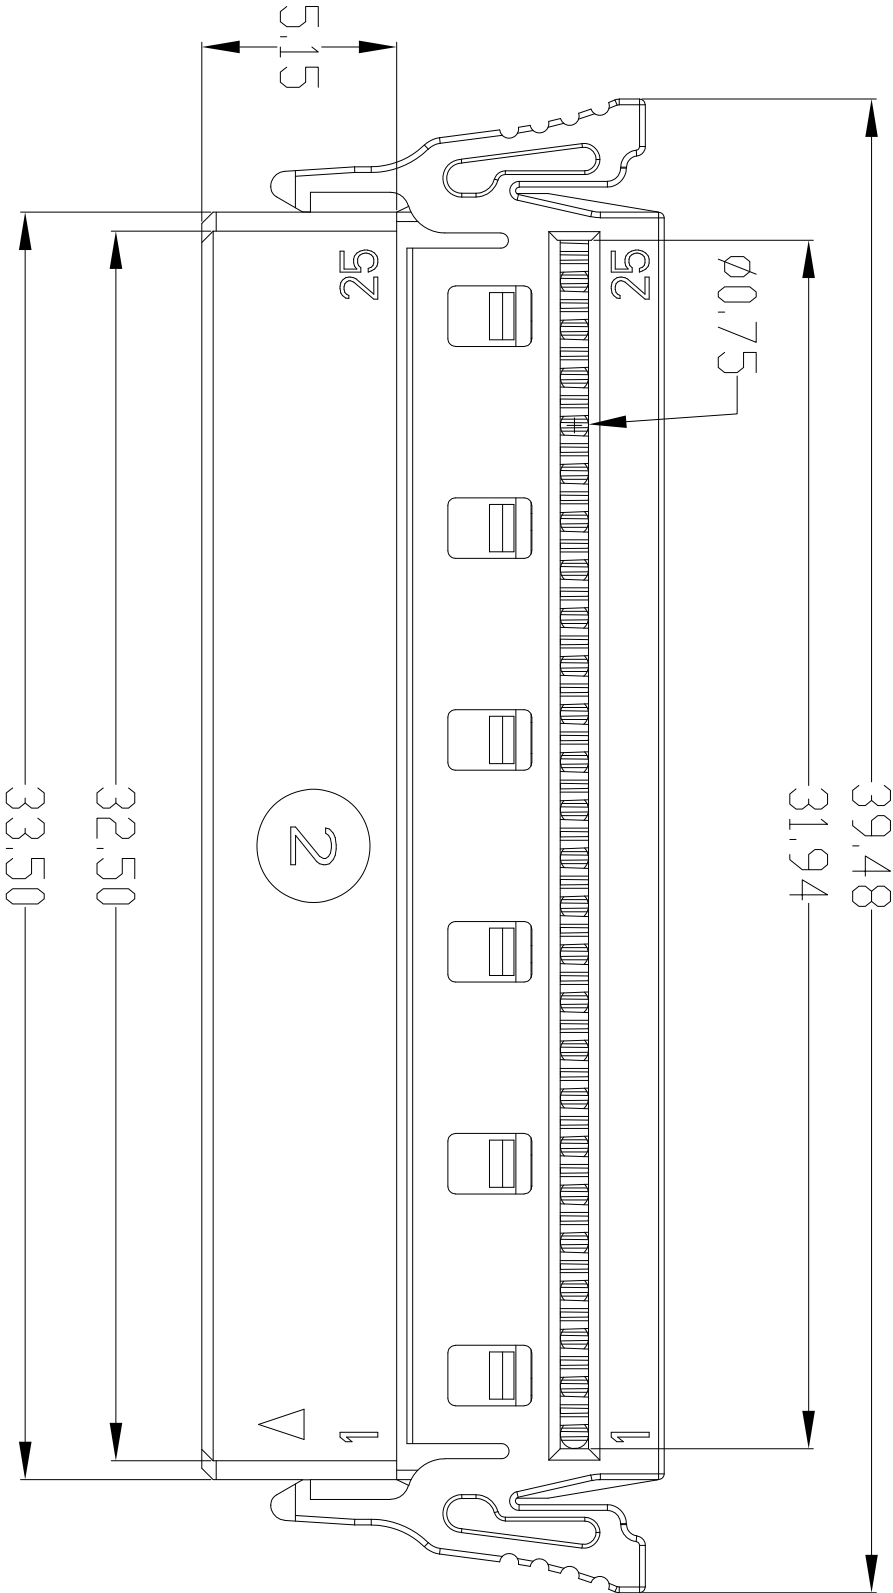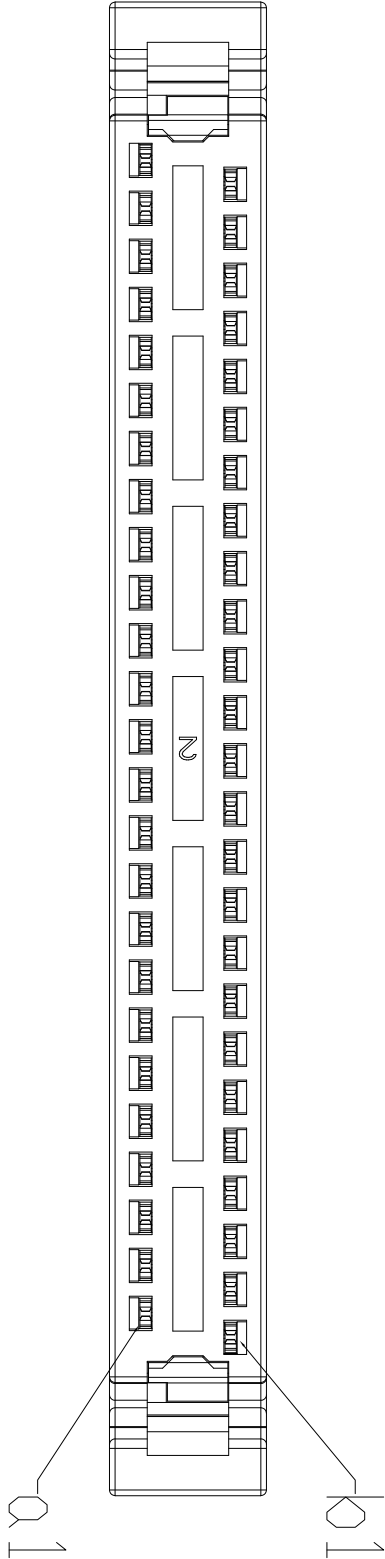

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE							
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				MATERIAL SPEC.		上海良速电子有限公司 Singnalite 1.27mm dual Row 50pin RA Female IDC Connector U													
				SEE NOTES 2															
				PROCESS SPEC.															
				--															
				THIRD ANGLE PROJECTION															
APPROVALS				DATE															
PREPARED BY				JUSTIN LI															
ENGINEER IN CHARGE				TYLER QIU															
DESIGN MANAGER				TYLER QIU															
DESIGN ACTIVITY GROUP				2020/5/28															
THIRD ANGLE PROJECTION				THIRD ANGLE PROJECTION		SCALE: 1:1 REF. SHEET 1 OF 1													
SIZE		DOCUMENT NO.		SL-FA50101															
C																			
				REV		B													