
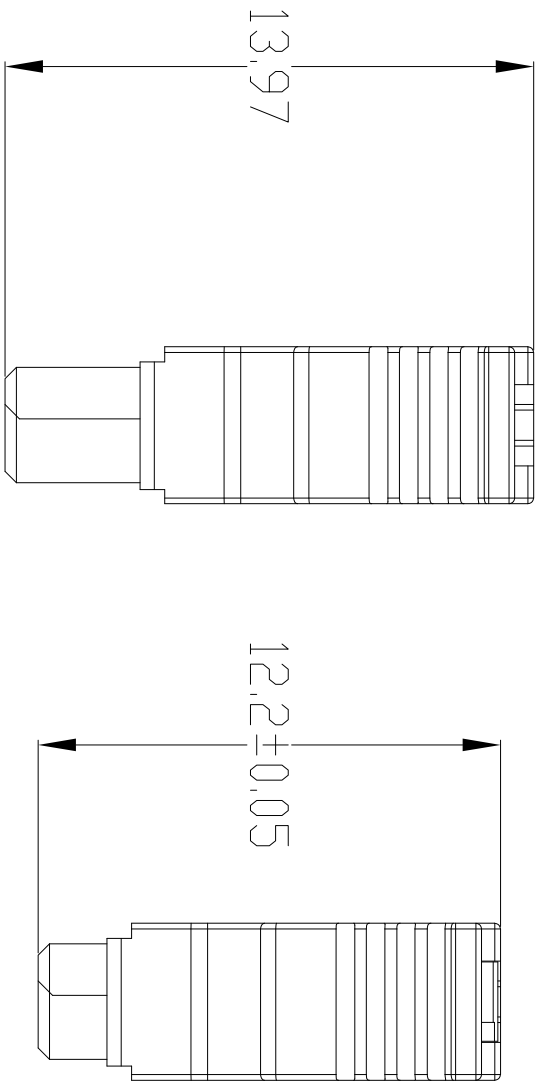


4

3

2




GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

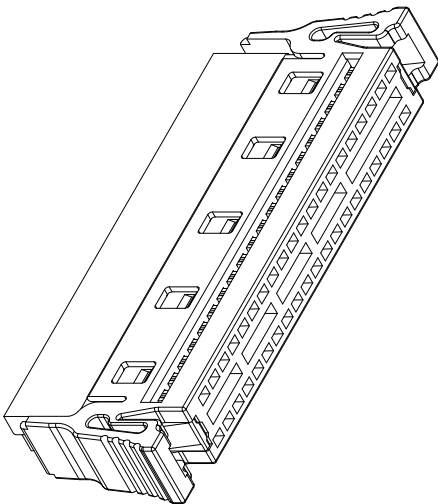

Wire guide initial state Wire guide pressed on

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First releas	Dec 30 2020
B	Drawing Templet update	May 28 2021

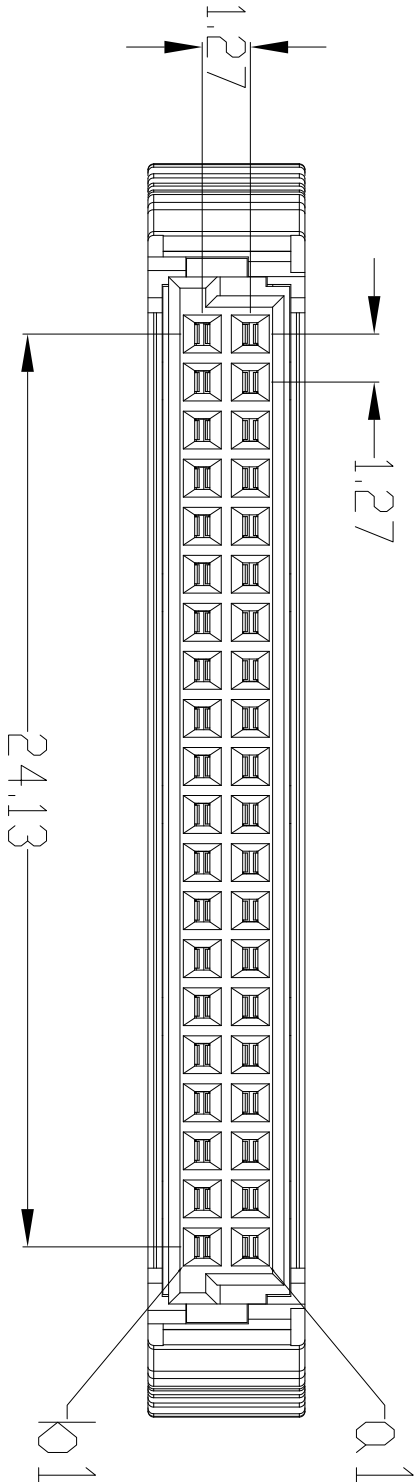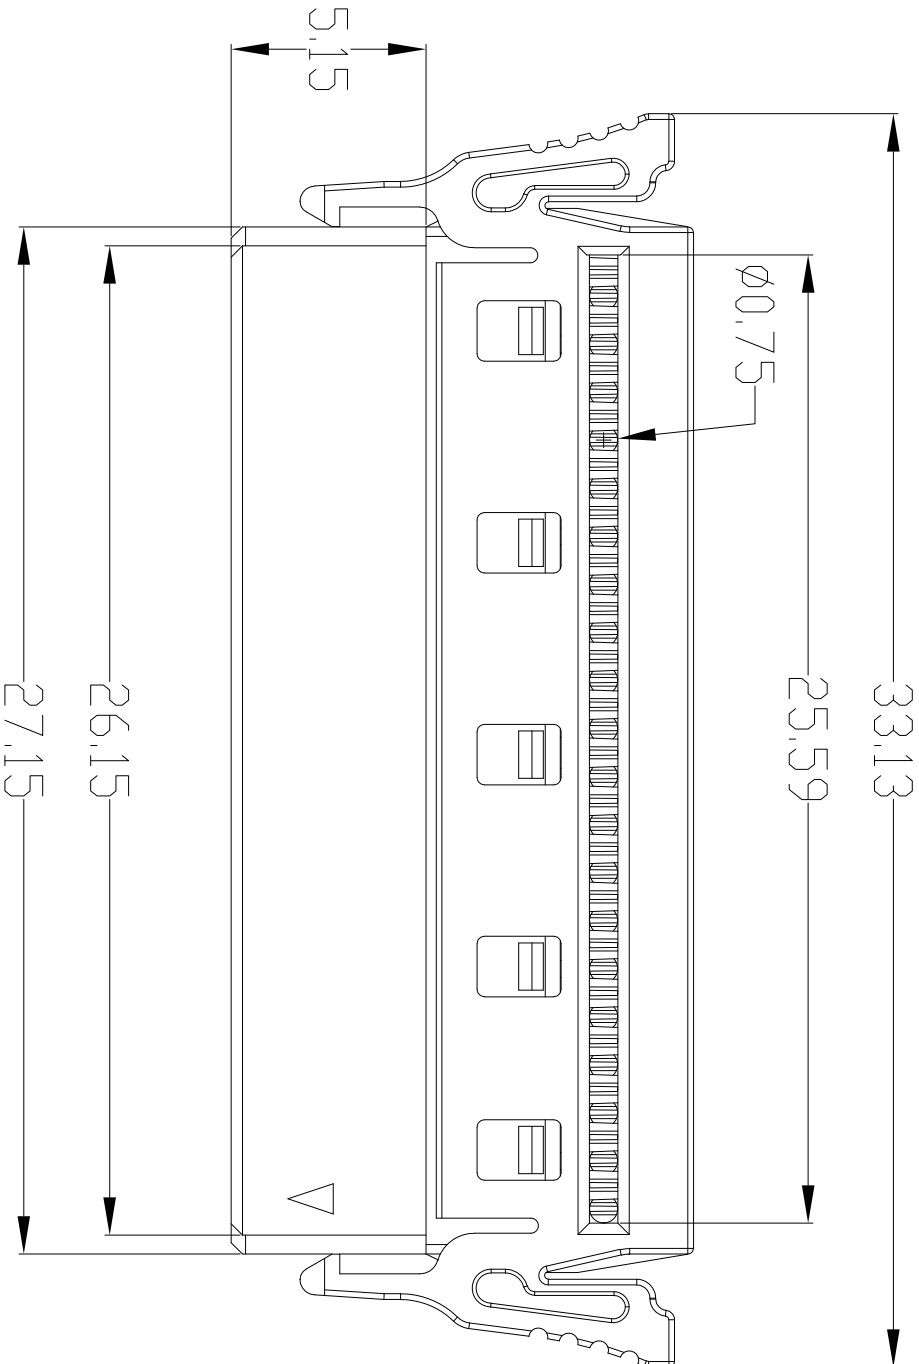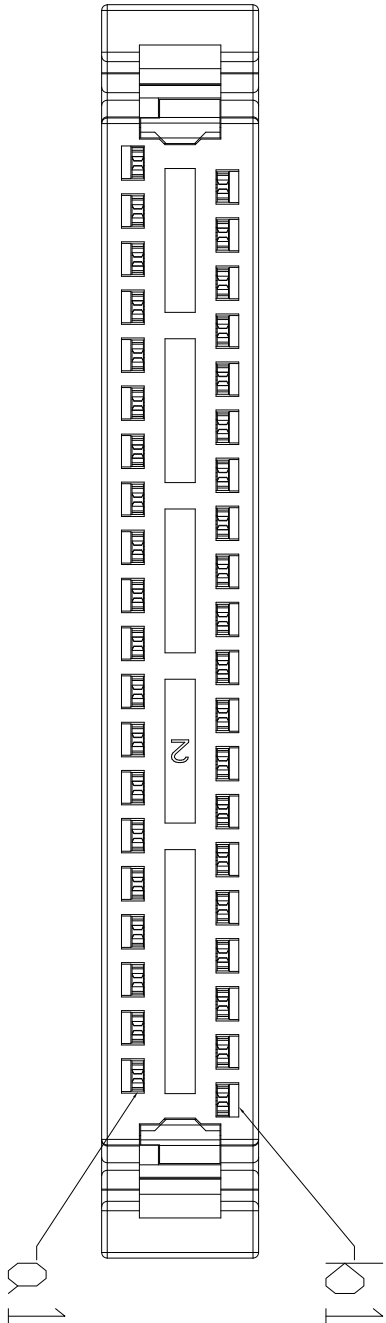

UNLESS OTHERWISE SPECIFIED		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
----------------------------	--	-----	-----	-------------	-------------	------

LINEAR DIMENSIONS ARE IN:
MILLIMETERS

MATERIAL SPEC.
SEE NOTES 2

APPROVALS
PREPARED BY JUSTIN LI
ENGINEER IN CHARGE TYLER QIU
DESIGN MANAGER TYLER QIU

DATE
2020/5/28

THIRD ANGLE PROJECTION

SIZE
C

DOCUMENT NO
SL-FA40101

REV
B

SCALE: 1:1

SHEET 1 OF 1

上海良速电子有限公司

Singnalite

1.27mm dual Row 40pin RA Female IDC Connector

U

NOTES:

1. THE PRODUCTS ARE ROHS COMPLIANCE.

2. MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

A

B

C

D

C

2

3

4

1