
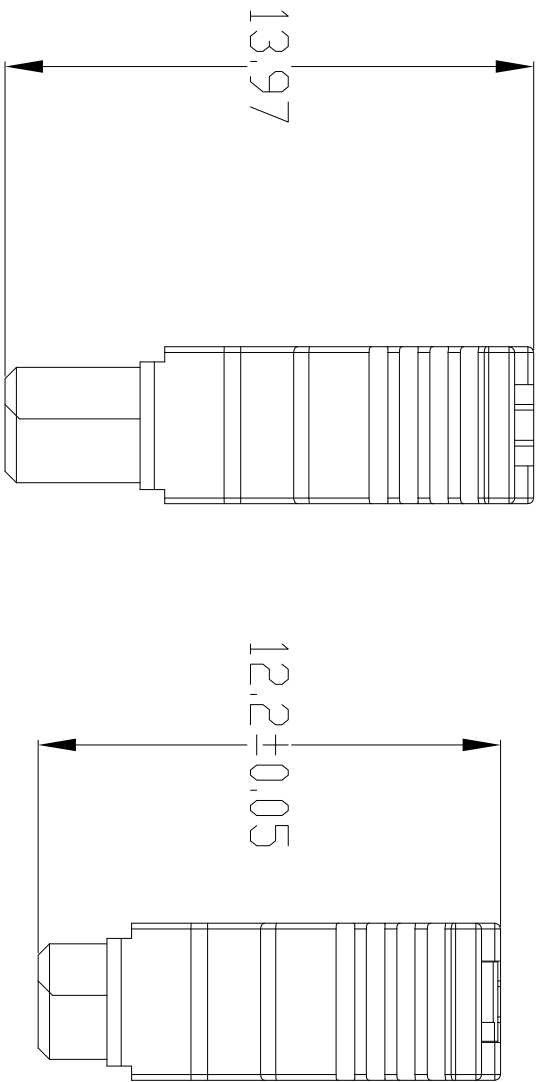


4

3

2




GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

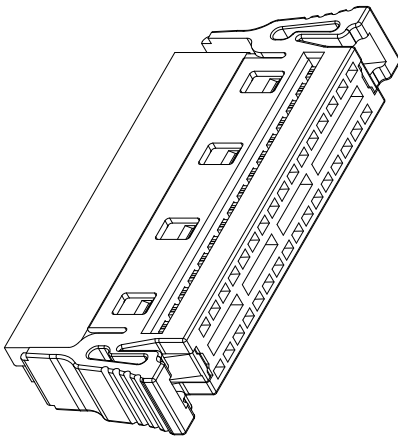

Wire guide initial state Wire guide pressed on


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First releas	Dec 30 2020
B	Drawing Templet update	May 28 2021

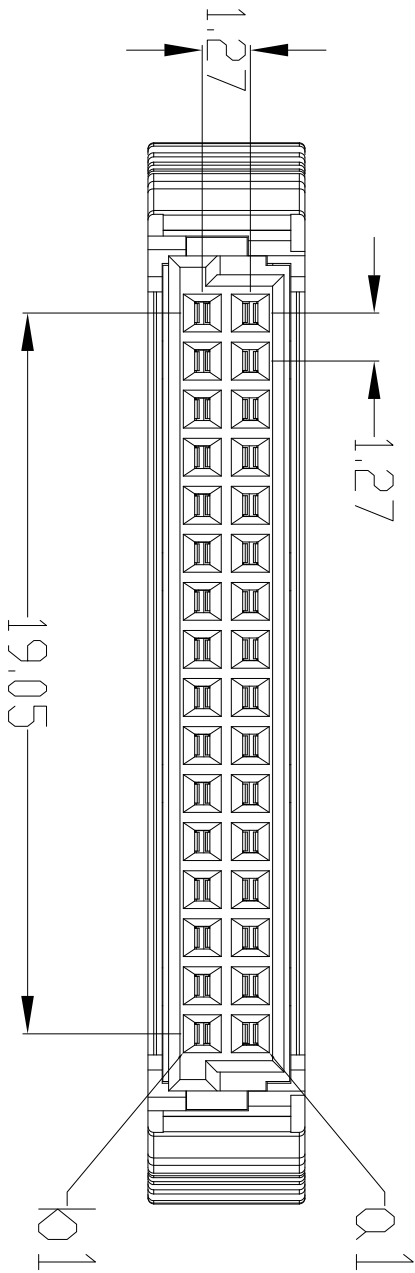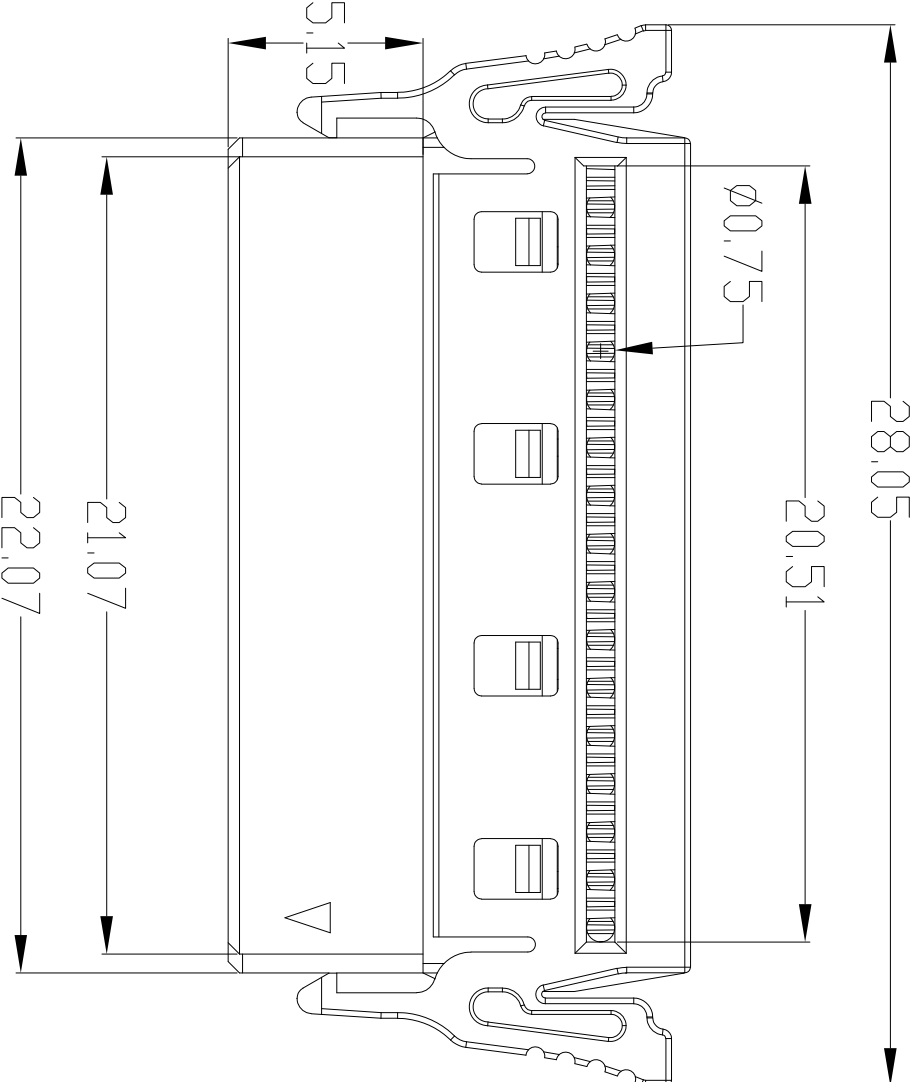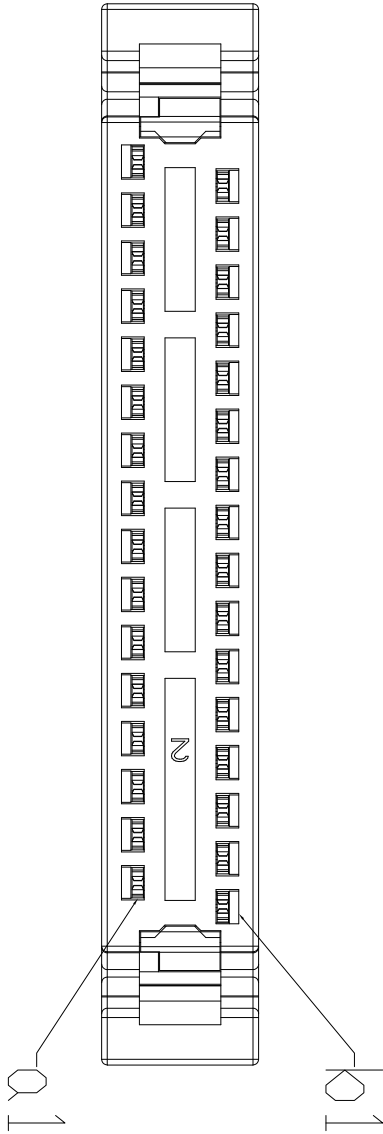

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING:LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT:COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Singnalite 1.27mm dual Row 32pin RA Female IDC Connector U					
				SEE NOTES 2							
				PROCESS SPEC.							
				--							
				THIRD ANGLE PROJECTION							
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		APPROVALS		DATE							
		PREPARED BY ENGINEER IN CHARGE DESIGN MANAGER DESIGN ACTIVITY GROUP		JUSTIN LI TYLER QIU TYLER QIU 2023/5/28							
											

4

3

2

1