


4

3





2

GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

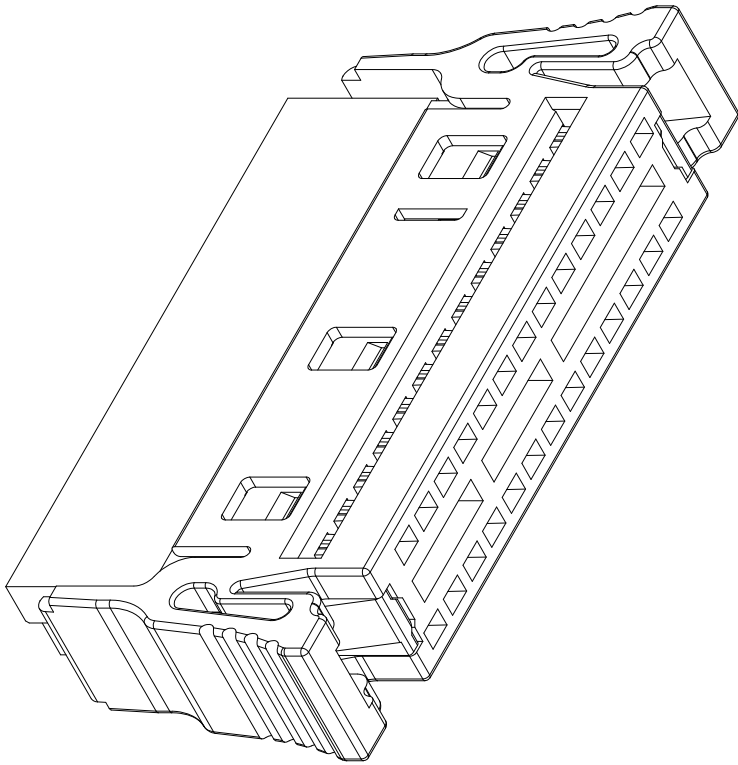


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE

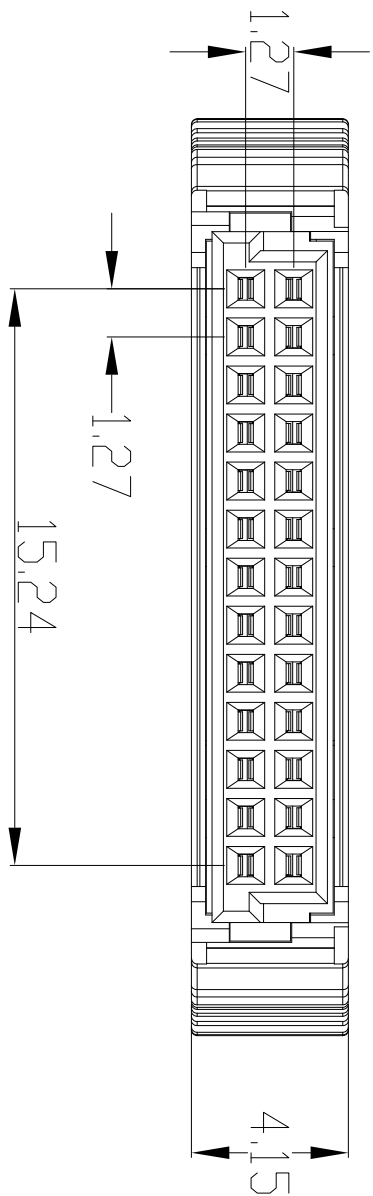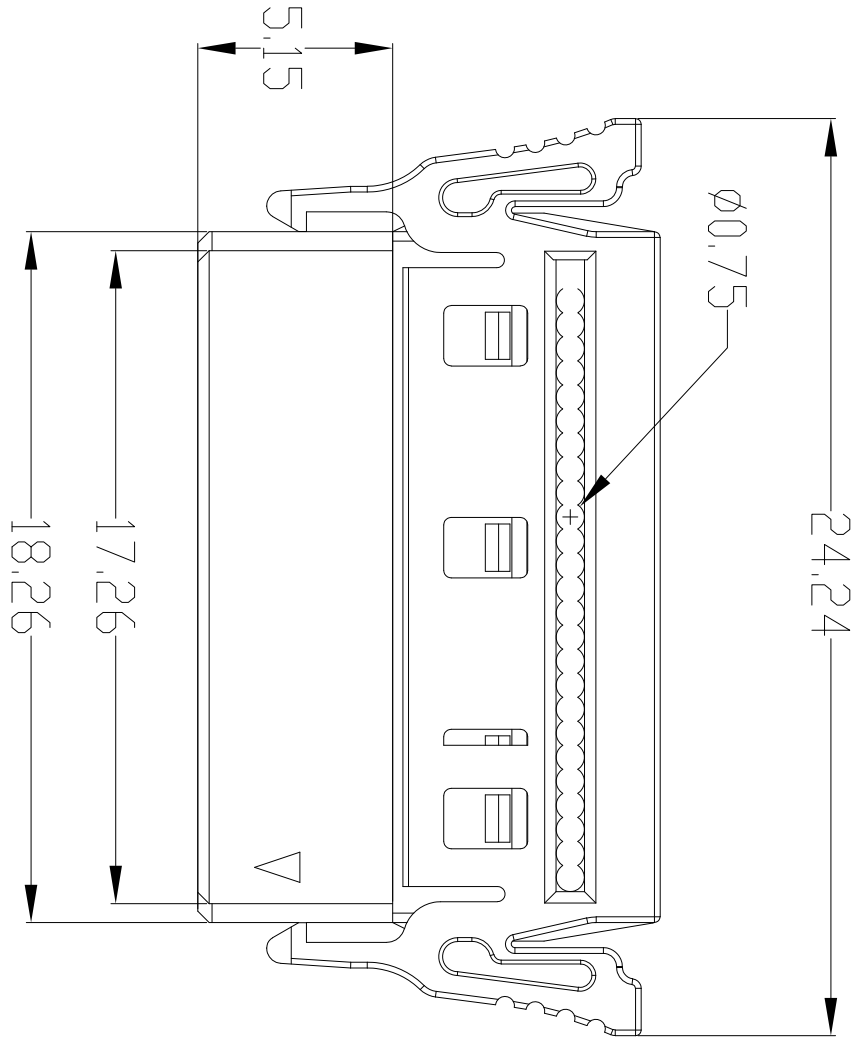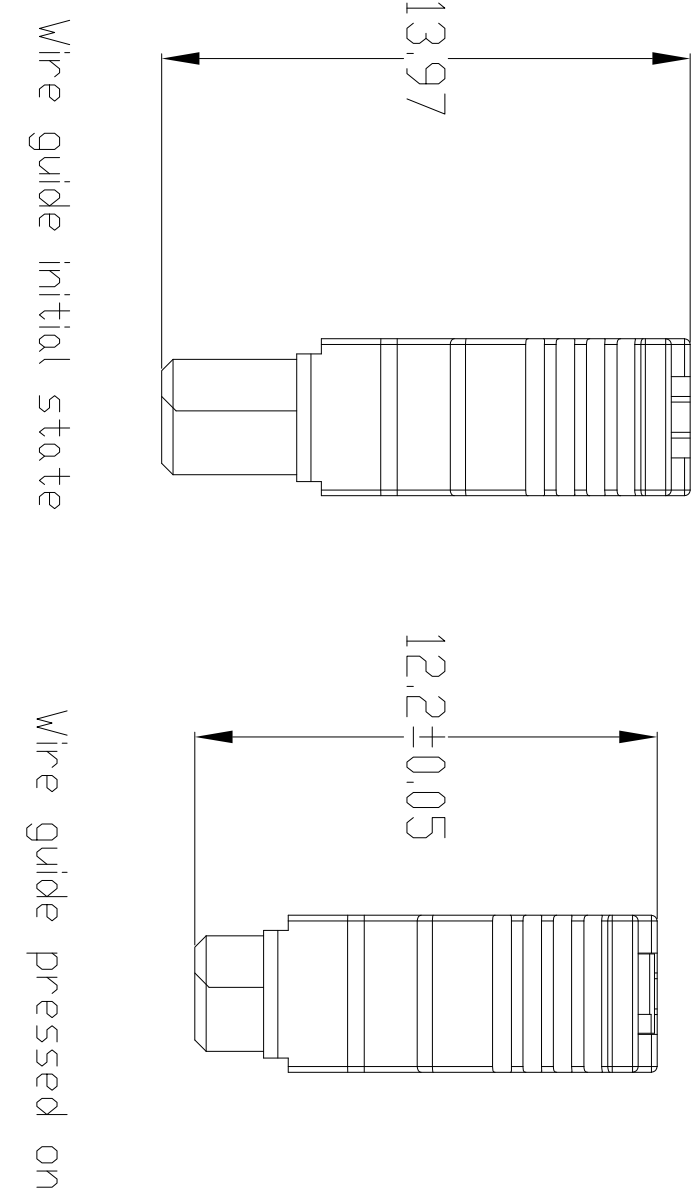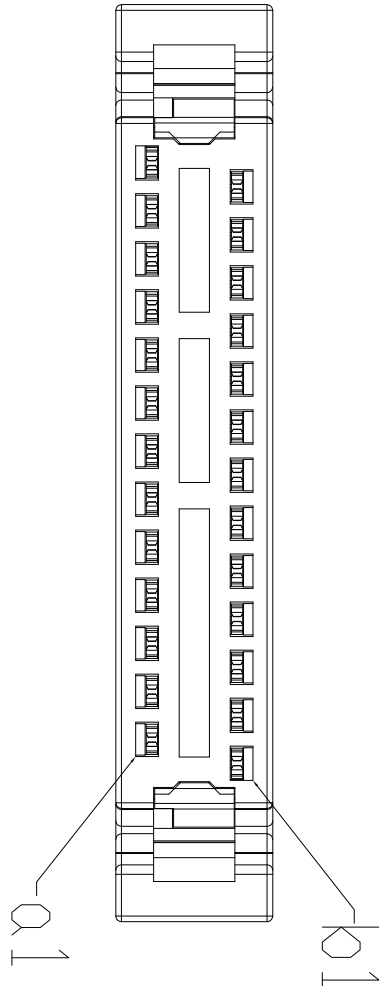

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE						
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		SEE NOTES 2		APPROVALS		DATE		上海良速电子有限公司 Singnalite 1.27mm dual Row 26pin RA Female SMT Connector U						
		PROCESS SPEC.														
		--				THIRD ANGLE PROJECTION		SIZE			DOCUMENT NO.		SL-FA26101		REV.	
						DESIGN ACTIVITY GROUP		2020/5/28			SCALE:		REF.		SHEET 1 OF 1	
																

A

B

C

4

3

2

1