

4







3

2

GENERAL TOLERANCE							SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400		
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	



CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE

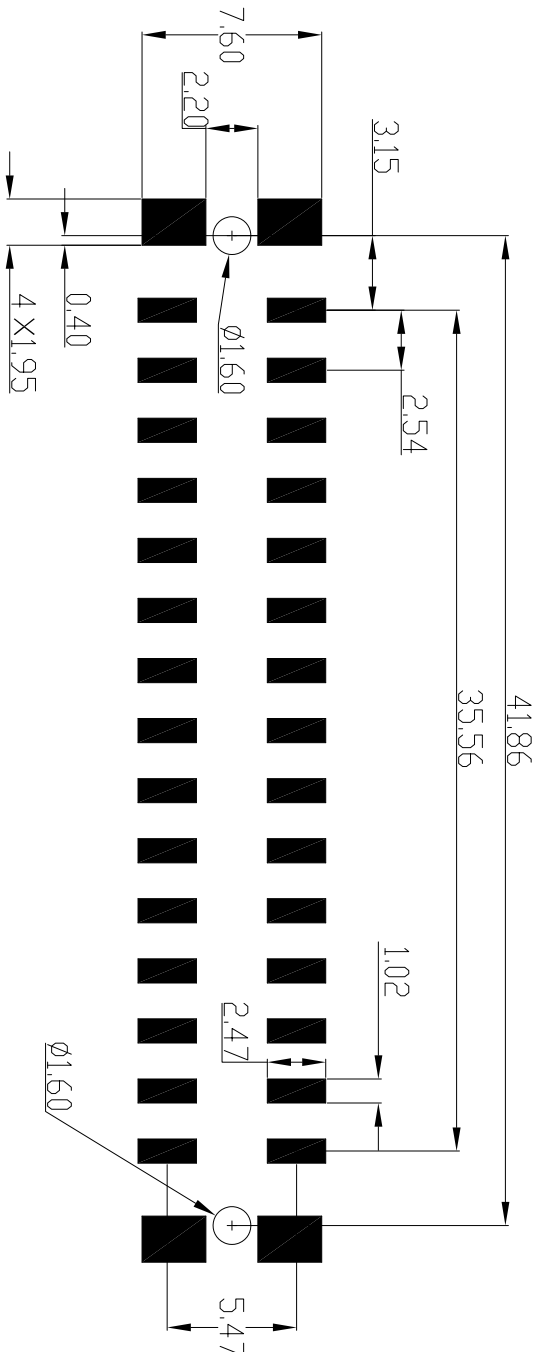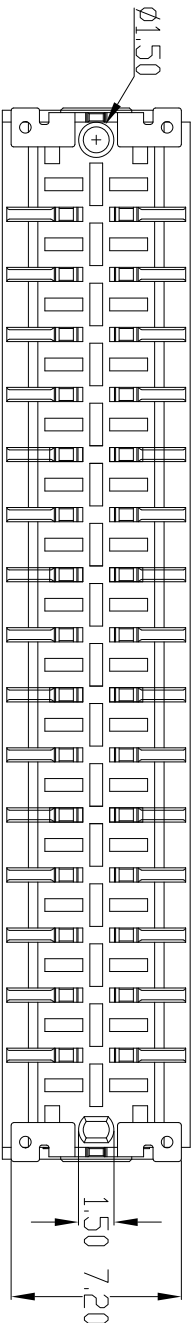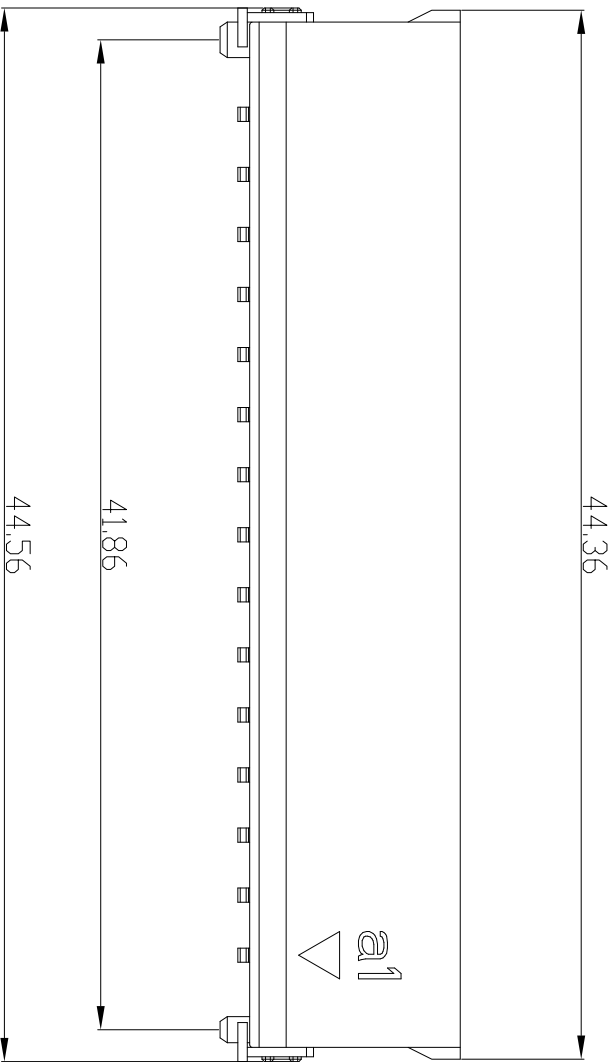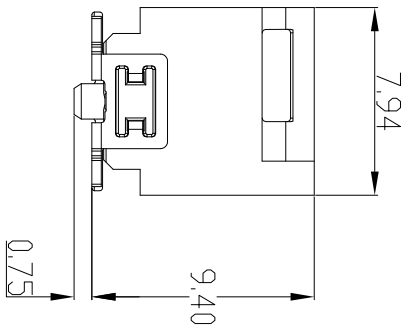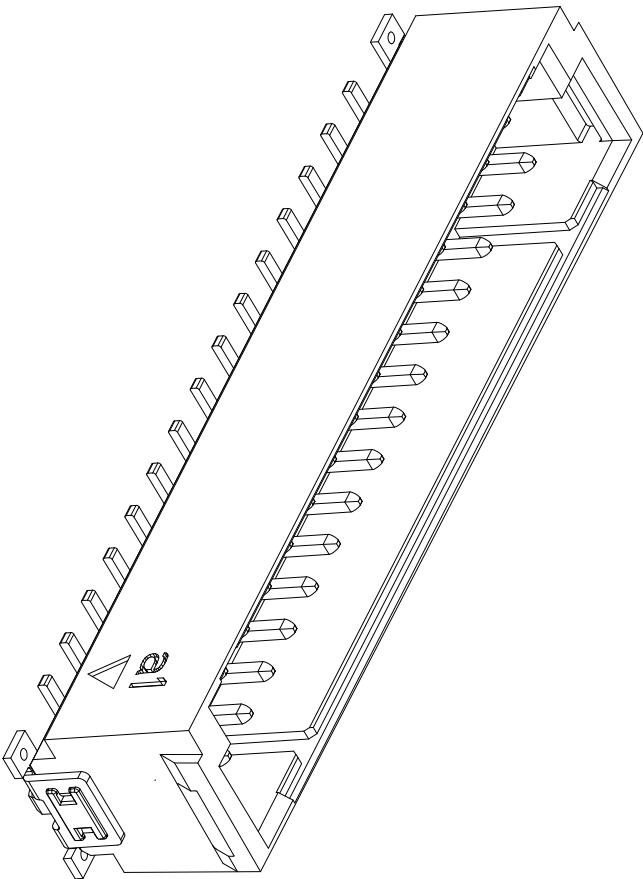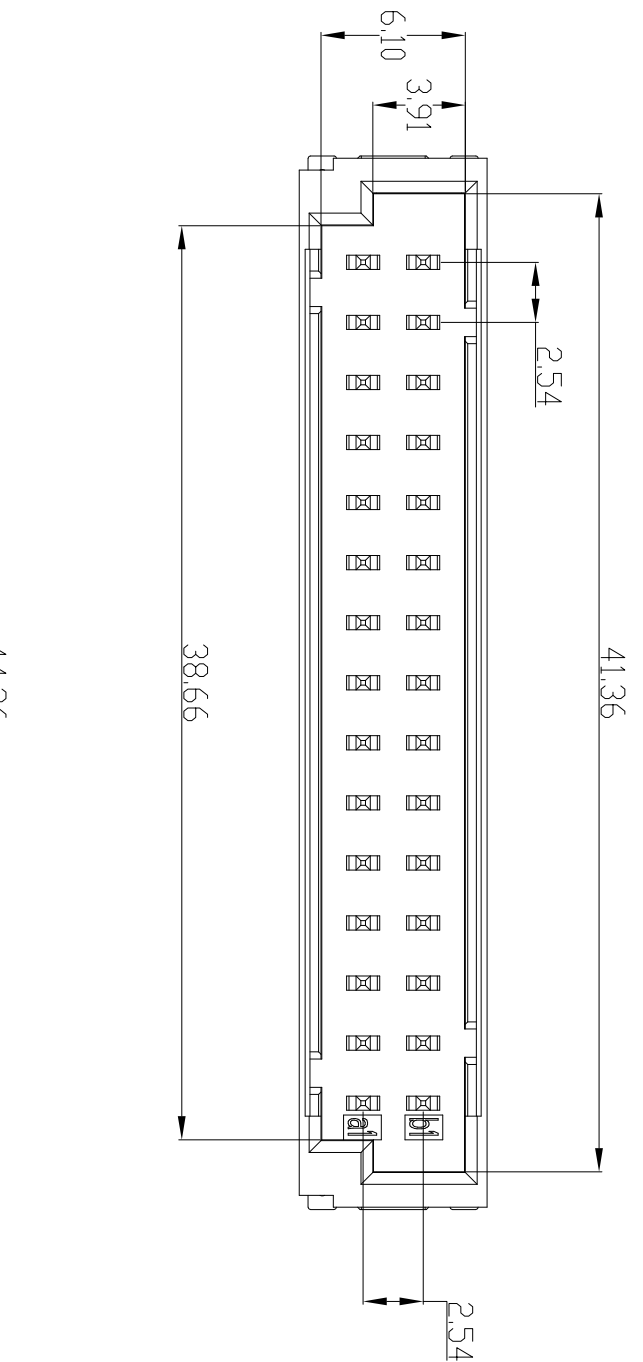

RECOMMENDED PCB-LAYOUT

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DPM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Powermax 30pin dual vertical male SMT U					
				SEE NOTES 2							
				PROCESS SPEC.							
				--							
LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY				APPROVALS		DATE		SIZE C DOCUMENT NO PM-MV30201 REV B			
				PREPARED BY JUSTIN LI		2021/4/14					
				ENGINEER IN CHARGE TYLER QIU							
				DESIGN MANAGER TYLER QIU							
				DESIGN ACTIVITY GROUP							
				THIRD ANGLE PROJECTION							
 								SCALE:			