

4

3

2



GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

D




CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE

D

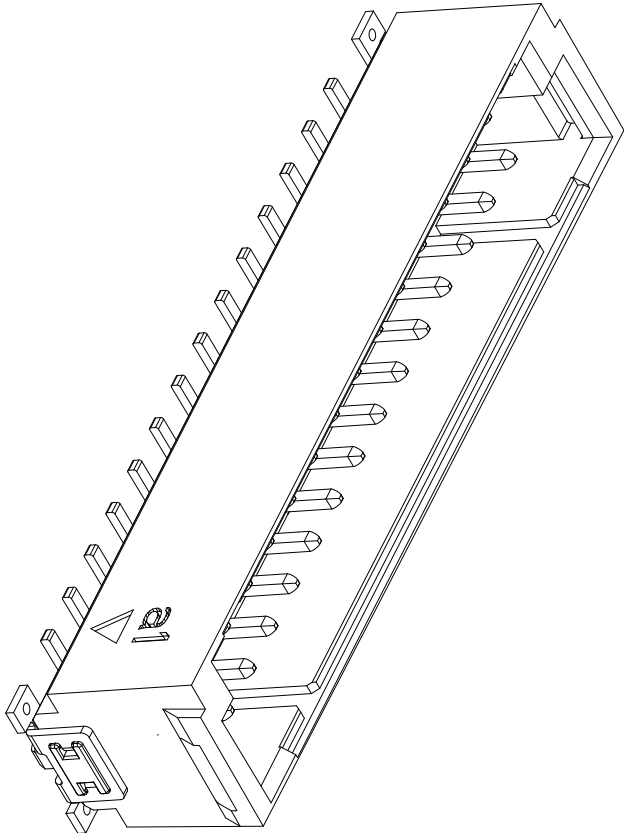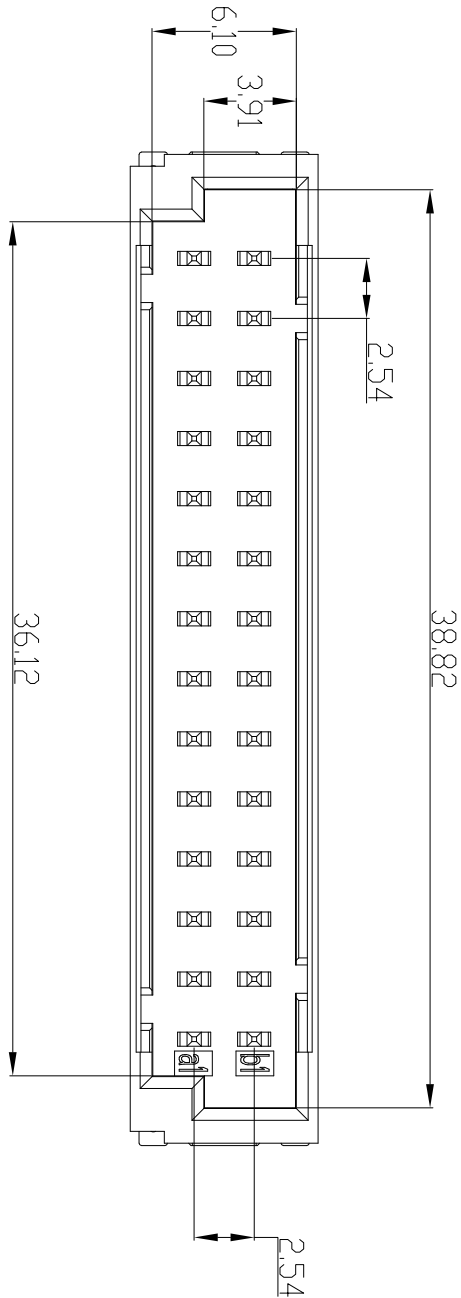


C

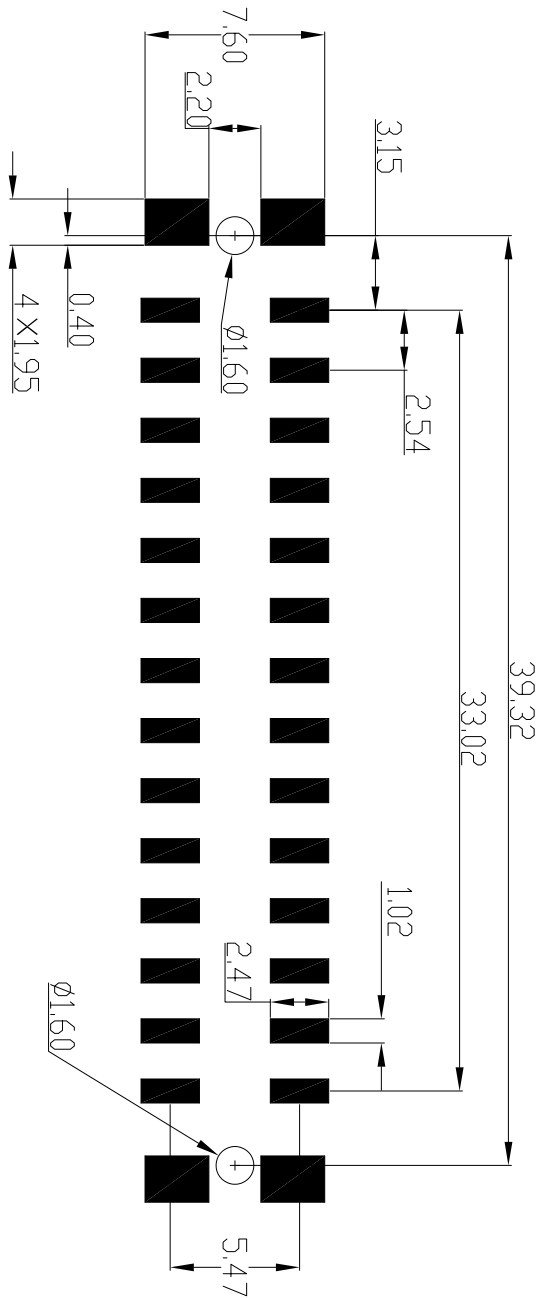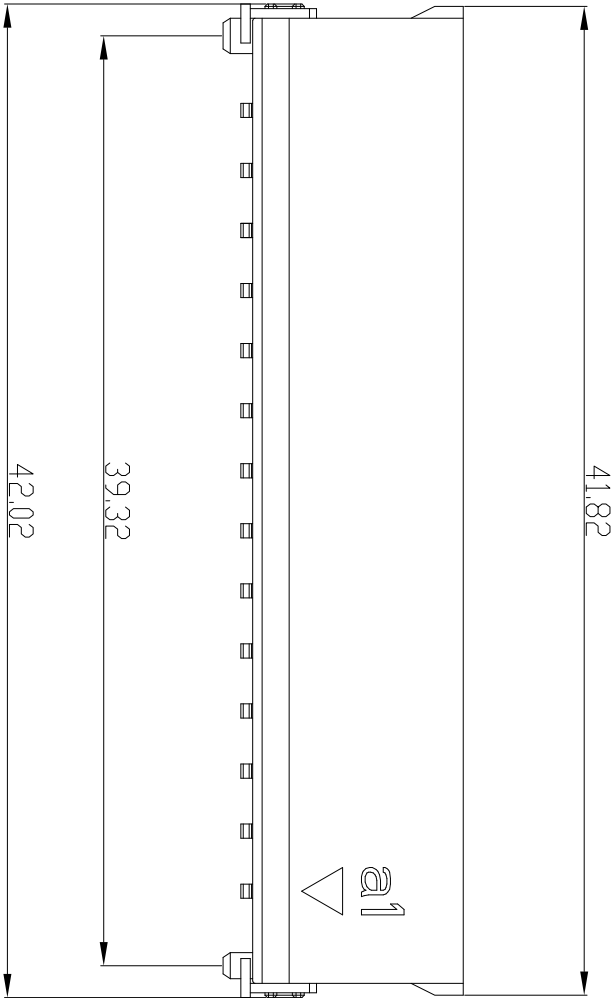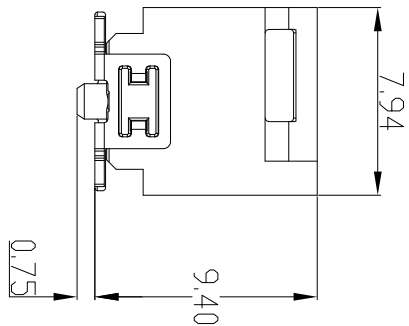

RECOMMENDED PCB-LAYOUT

B

B

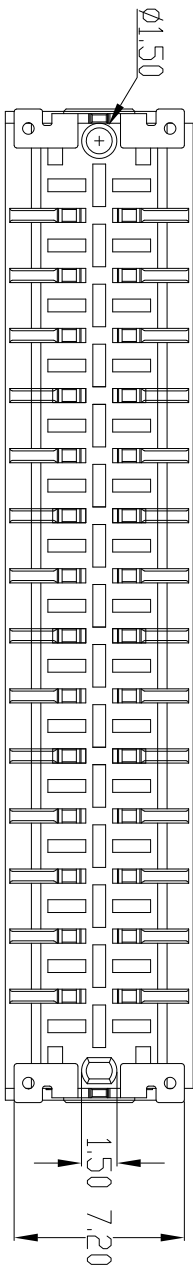

A

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
- COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
----------------------------	--	-----	-----	-------------	-------------	------

LINEAR DIMENSIONS ARE IN:
MILLIMETERS

TOLERANCES:
ANGLES: ±2°
DEFAULT LINEAR TOLERANCES SEE TABLE

DIM. & TOL. PER ASME Y14.5M-1994;
DPM PER MIL-DTL-31000;

LEGENDS:
=FLAG NOTE CALL OUT
REFERENCE ONLY

MATERIAL SPEC.
SEE NOTES 2


PROCESS SPEC.
--

APPROVALS
PREPARED BY JUSTIN LI
ENGINEER IN CHARGE
DESIGN MANAGER TYLER QIU
DESIGN ACTIVITY GROUP
2021/4/14

上海良速电子有限公司

Powermax

28pin dual vertical male SMT



SIZE	DOCUMENT NO	REF.	SHEET 1 OF 1
C	PM-MV28201		

4

3

2

1