

4

3

2



GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

D




CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE


D

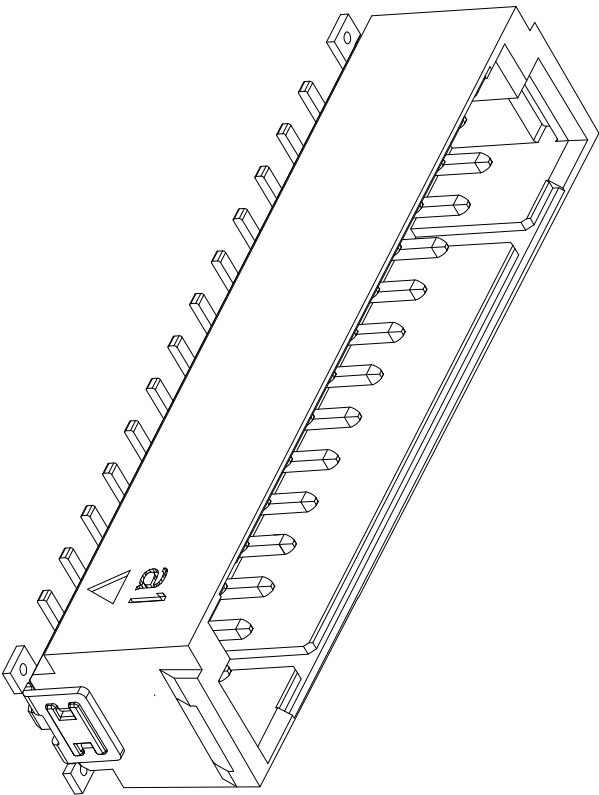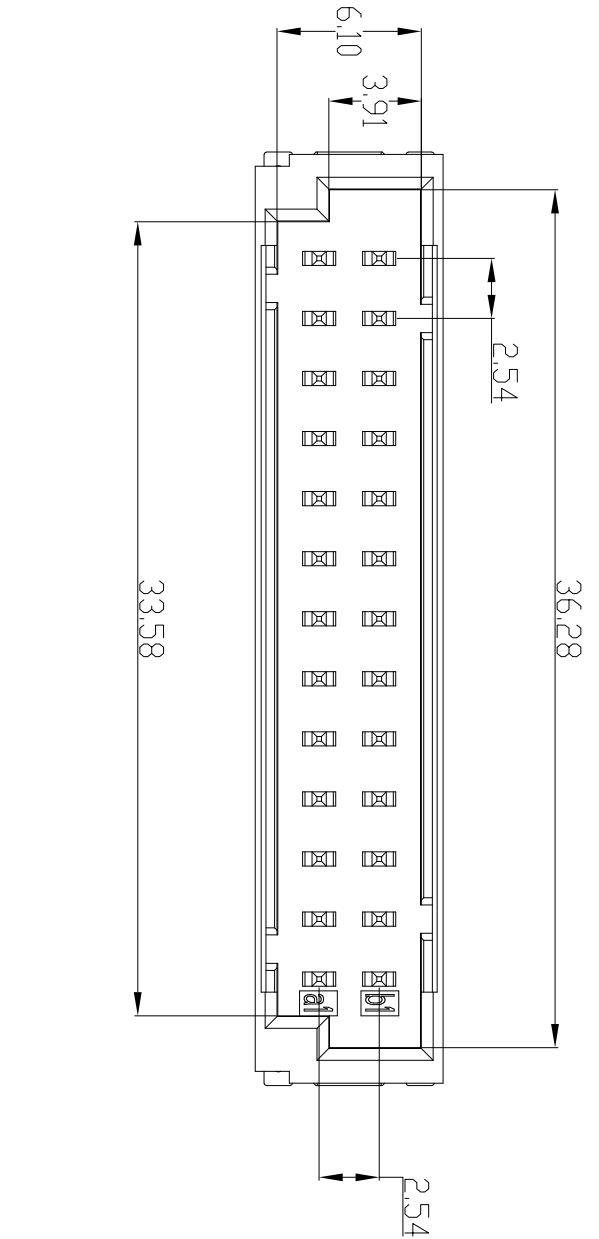

C

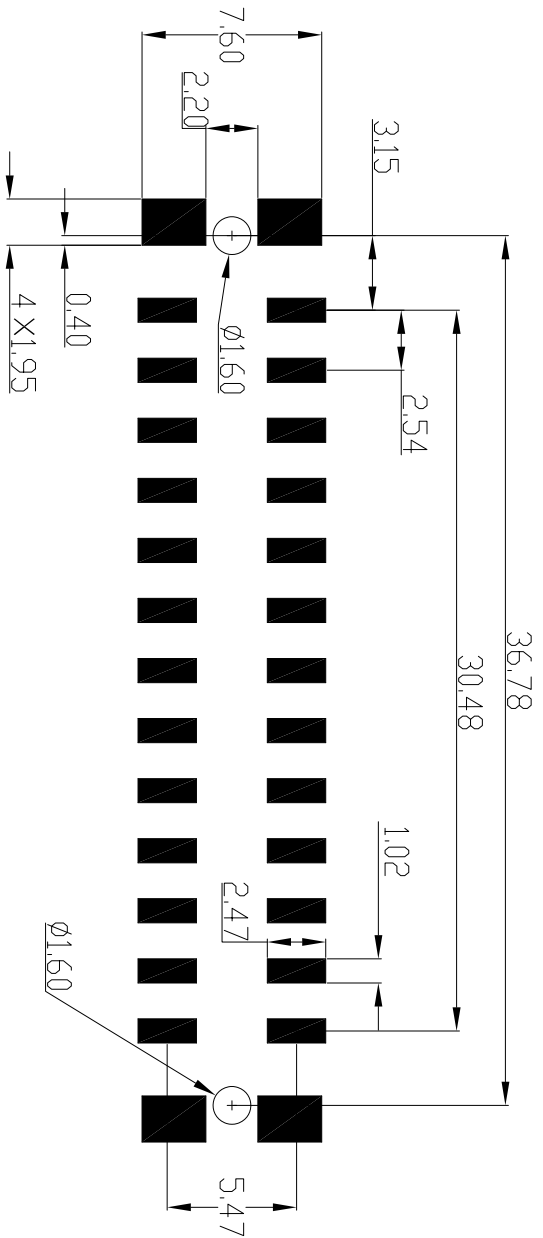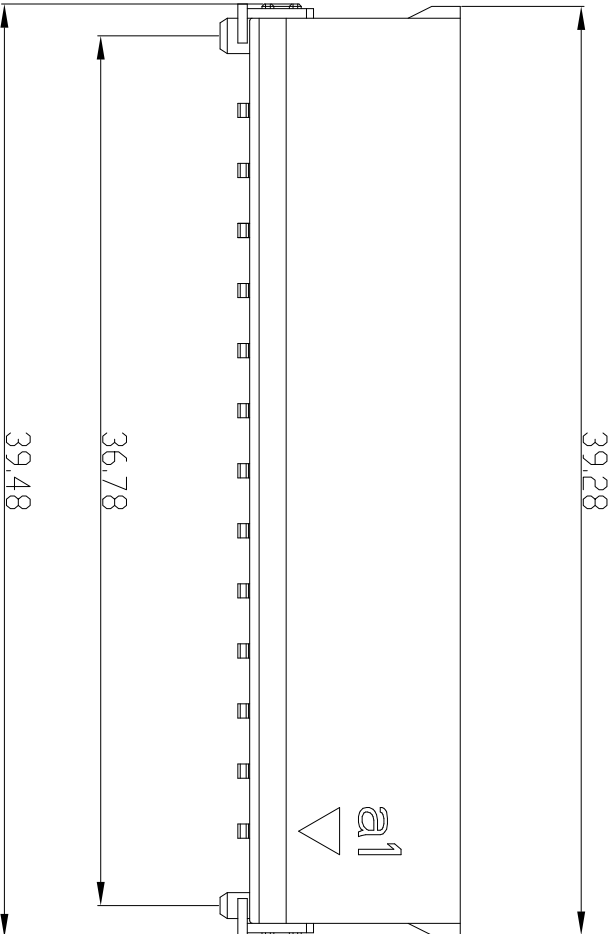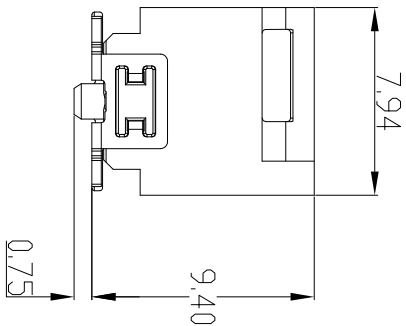

B

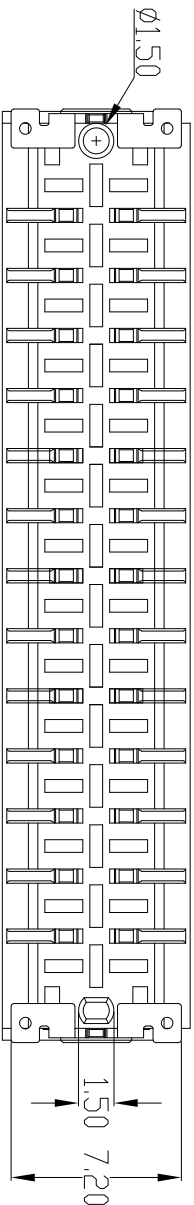

B

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

A

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Powermax 26pin dual vertical male SMT U			
				SEE NOTES 2					
				PROCESS SPEC.					
				--					
				THIRD ANGLE PROJECTION					
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				APPROVALS		DATE			
				PREPARED BY ENGINEER IN CHARGE		JUSTIN LI		2021/4/14	
				DESIGN MANAGER		TYLER QIU			
				DESIGN ACTIVITY GROUP		TYLER QIU			