

4

3

2



GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

D




CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020/6/1

D

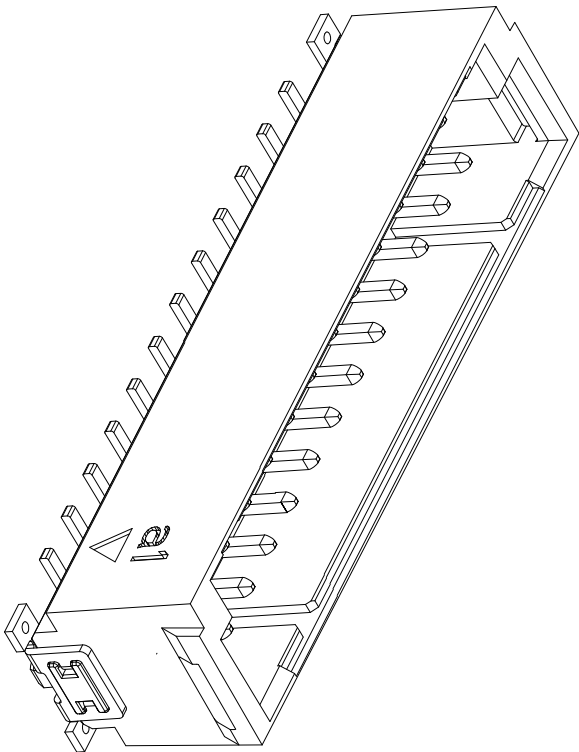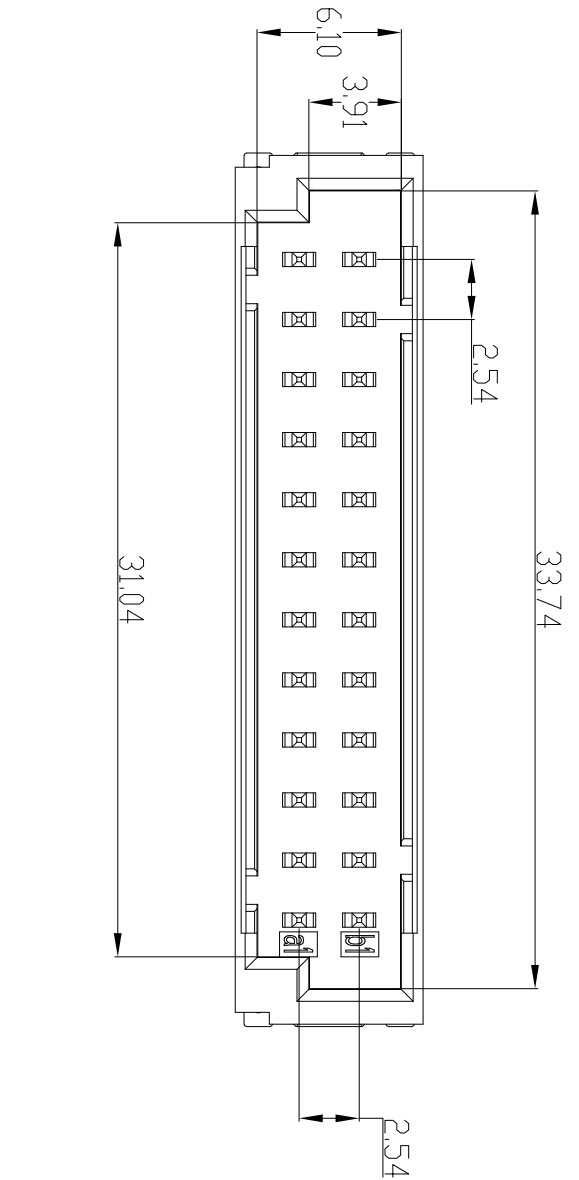


C

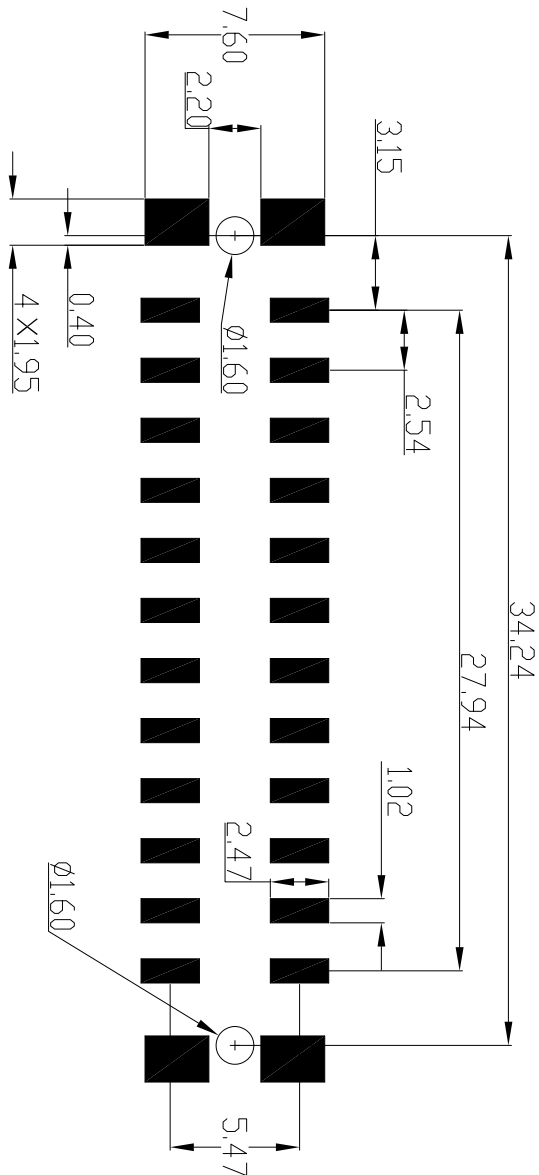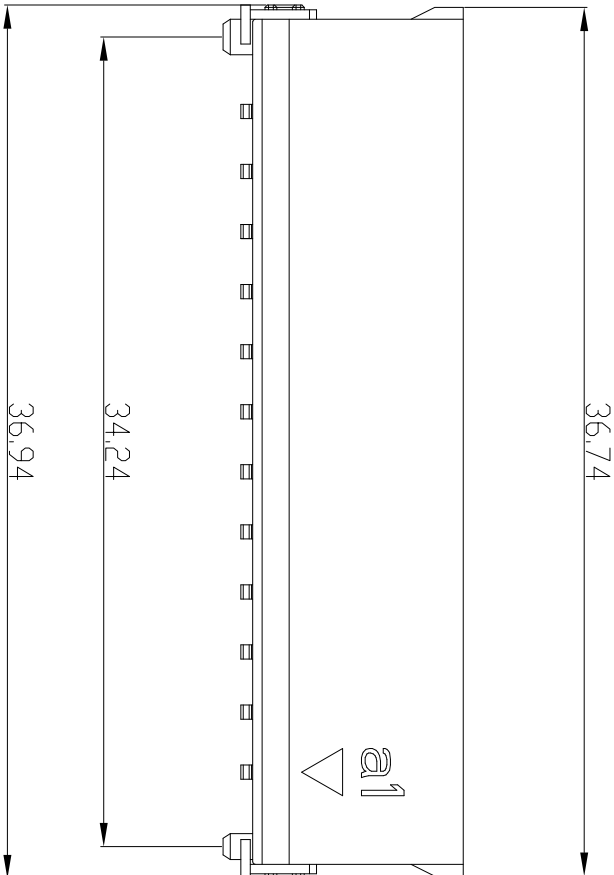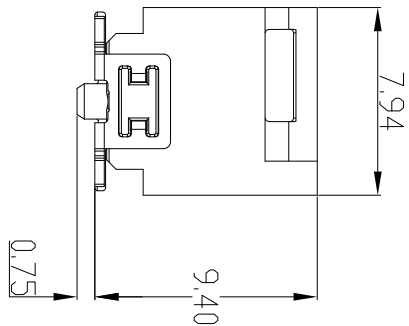

B

B

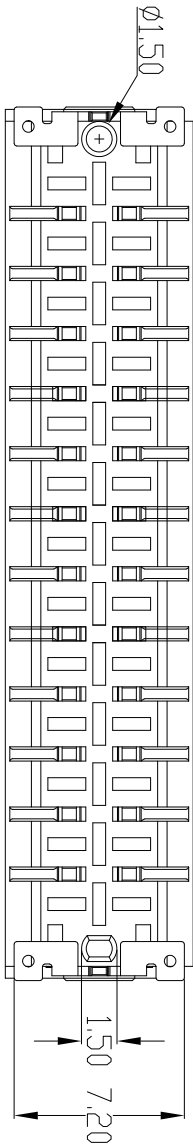

A

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:

- HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
- CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
- COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powermax 24pin dual vertical male SMT	U	
		SEE NOTES 2		PREPARED BY	JUSTIN LI				
				ENGINEER IN CHARGE	TYLER QIU	2020/6/1			
				DESIGN MANAGER	TYLER QIU				
		PROCESS SPEC.		THIRD ANGLE PROJECTION					
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		--				SIZE	DOCUMENT NO.	REF.	SHEET 1 OF 1