

4

3

2



GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

D




CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE


D

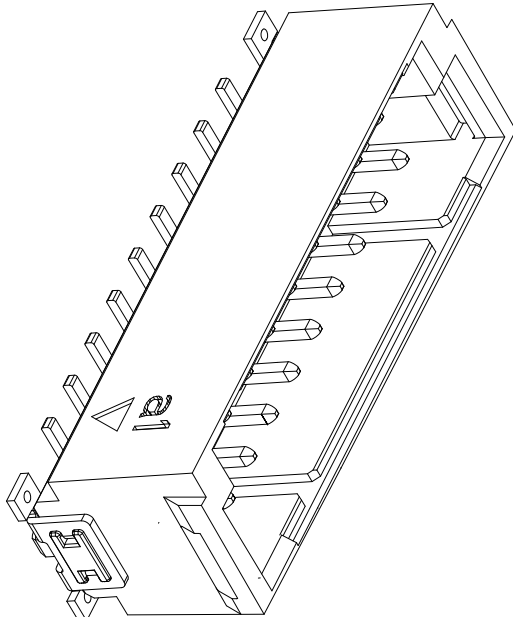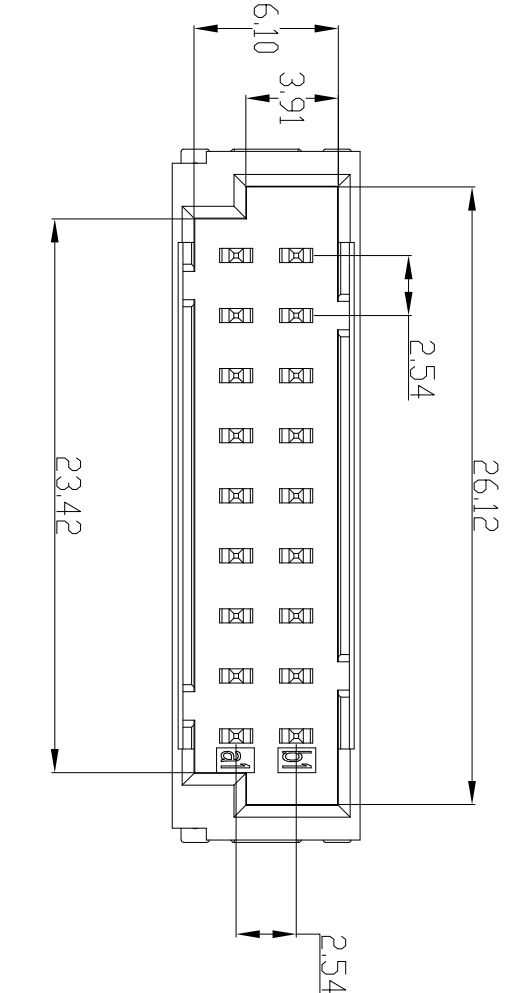

C

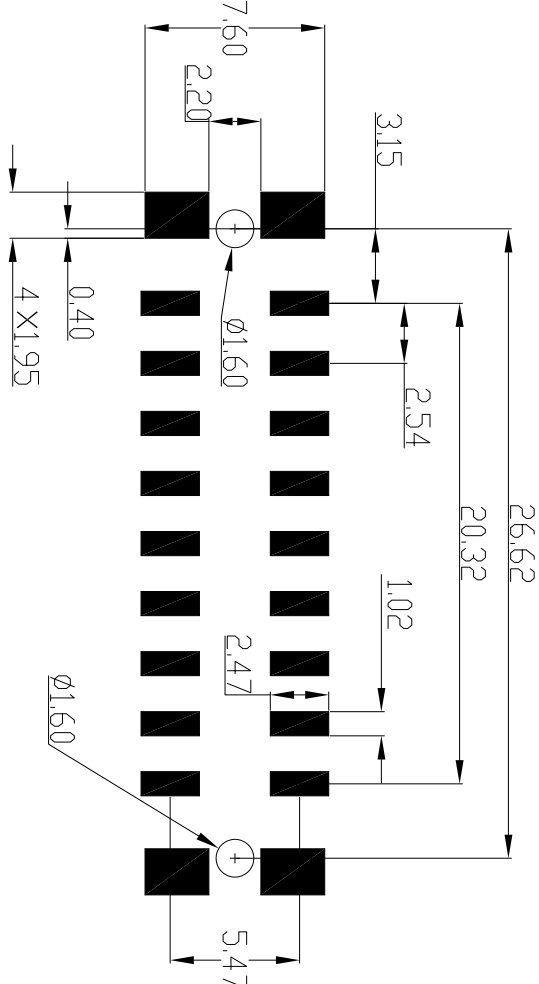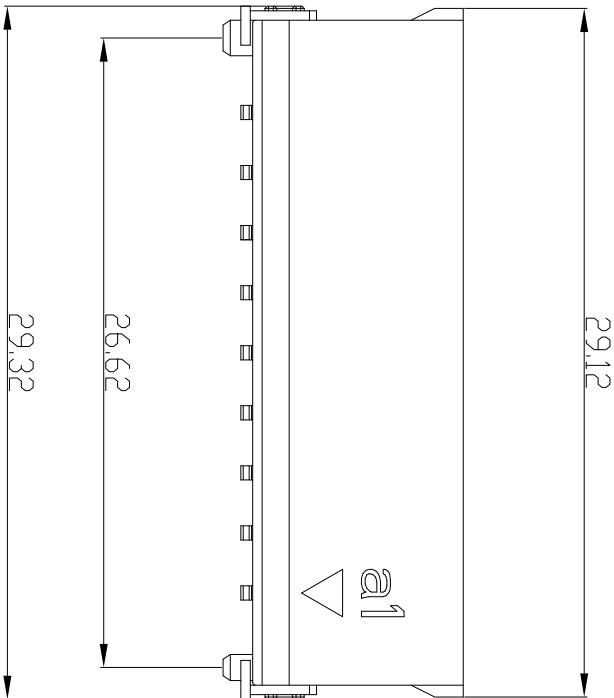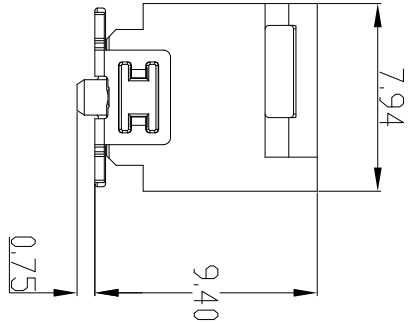

B

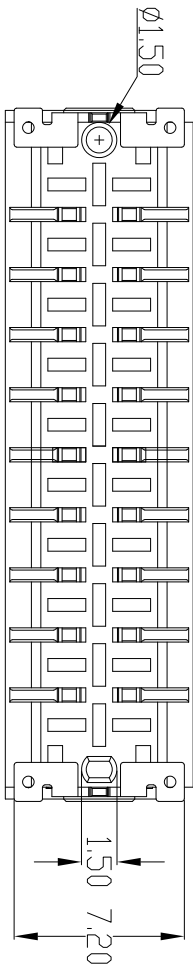

B

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
 - HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
 - CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

A

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		APPROVALS		DATE		上海良速电子有限公司 Powermax 18pin dual vertical male SMT U			
				SEE NOTES 2				TYLER QIU					
				2020/6/1				TYLER QIU					
				2020/6/1				TYLER QIU					
				PROCESS SPEC.		THIRD ANGLE PROJECTION		DESIGN ACTIVITY GROUP					
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				--				SCALE:		SHEET 1 OF 1			
				--				SCALE:					

2

3

4

A