

4







3

2

GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE

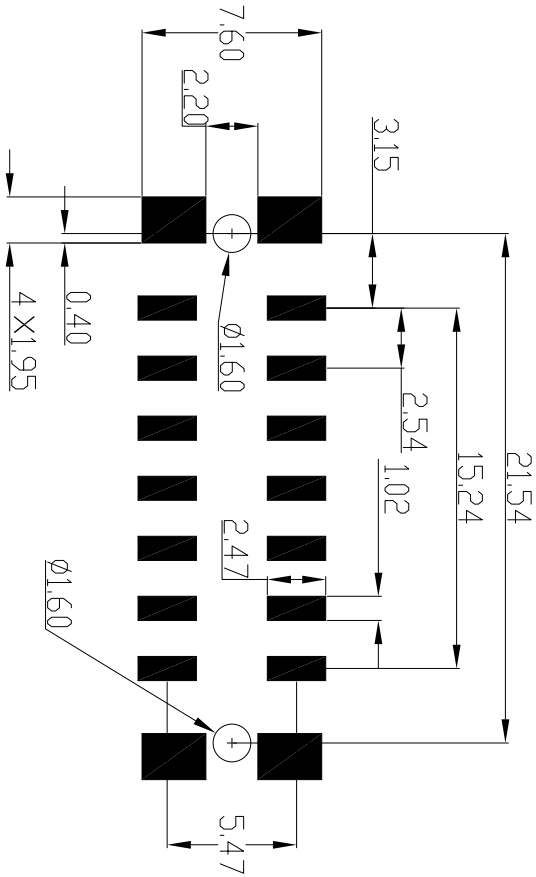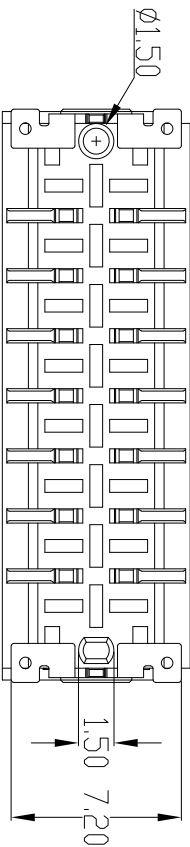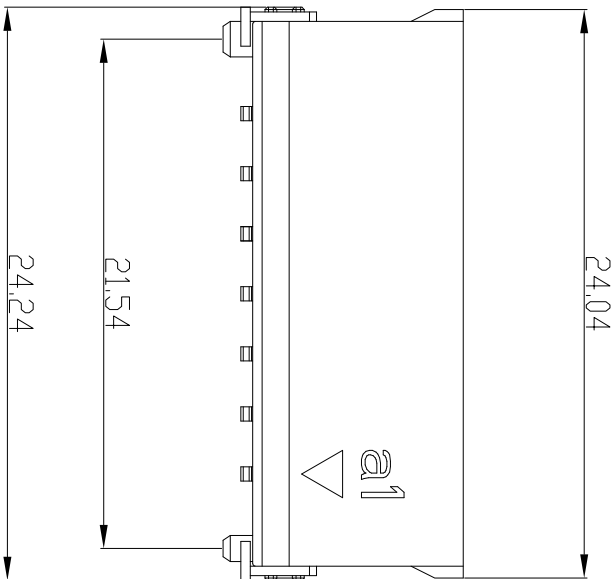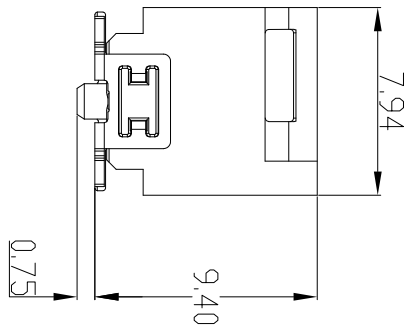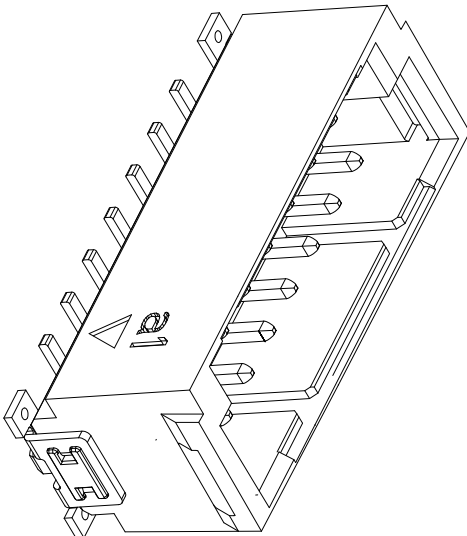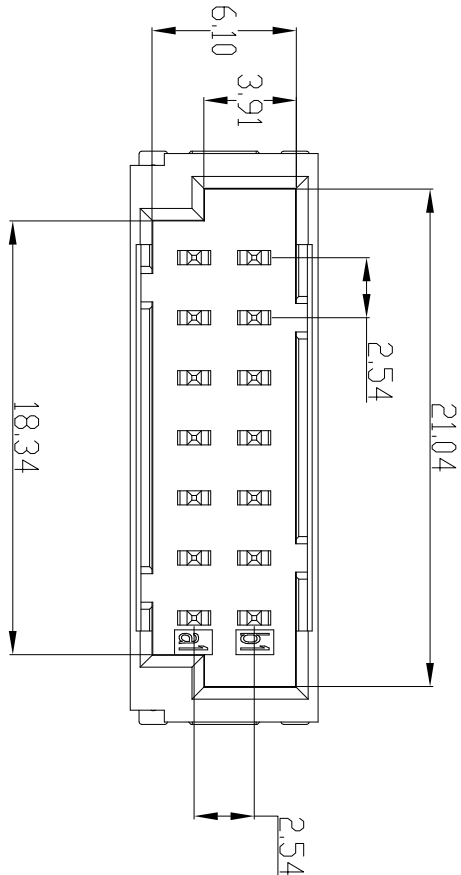

RECOMMENDED PCB-LAYOUT

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE		
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		APPROVALS		DATE		上海良速电子有限公司 Powermax 14pin dual vertical male SMT U		
				SEE NOTES 2								
				PROCESS SPEC.		ENGINEER IN CHARGE TYLER QIU		2020/6/1				
				--		DESIGN MANAGER TYLER QIU		THIRD ANGLE PROJECTION				
LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY						THIRD ANGLE PROJECTION		SCALE:				
						SIZE		C		REF.		
						DOCUMENT NO.		PM-MV14201		SHEET 1 OF 1		

A

B

C

D

4

3

2

1