

4

3

2



GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

D

CUSTOMER DRAWING



REVISIONS			
REV	DESCRIPTION	DATE	

D

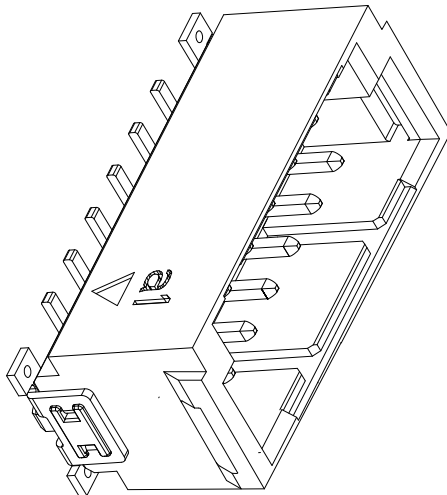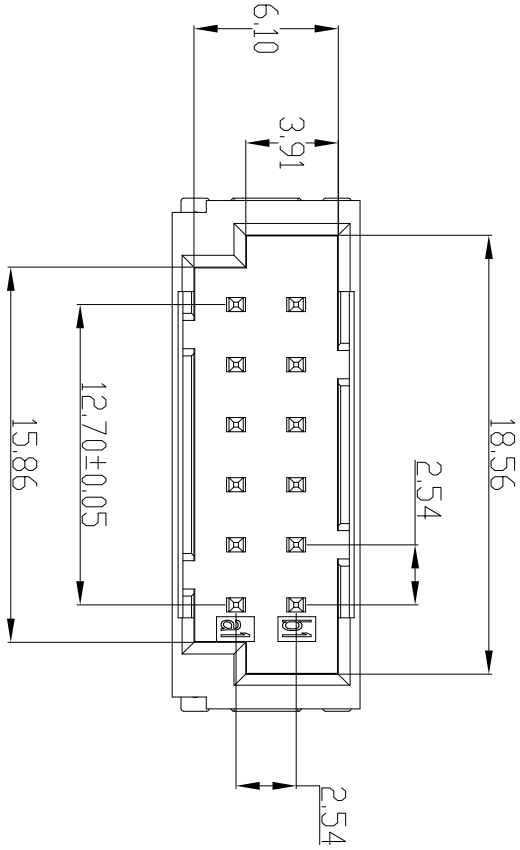


C

B

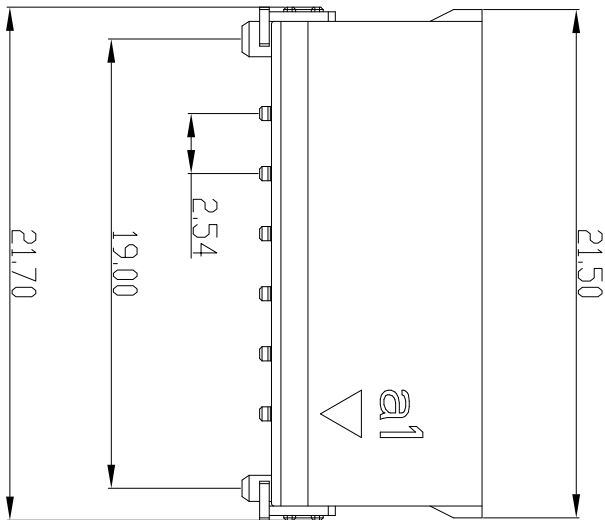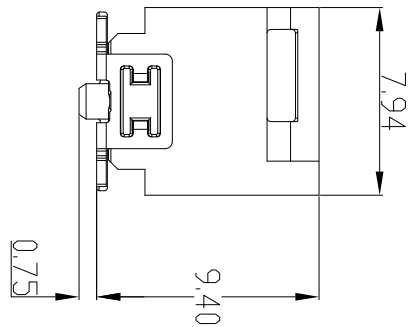

B

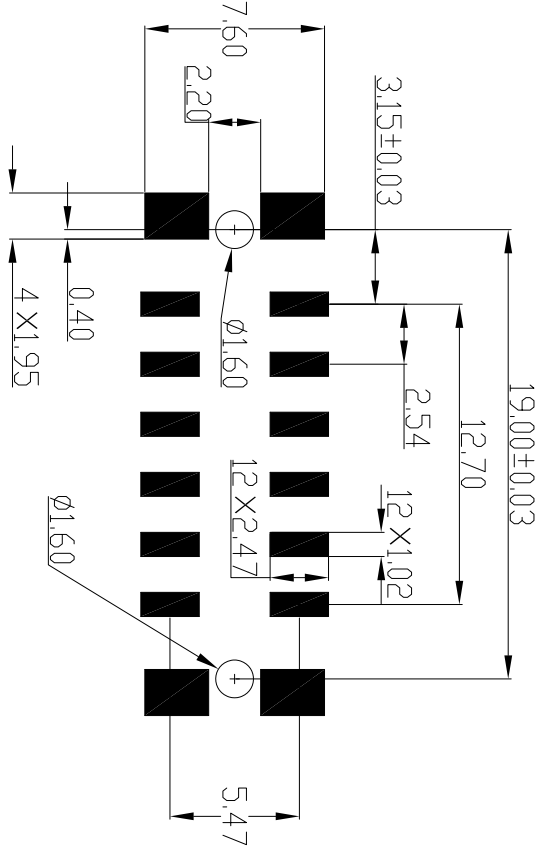

A

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED

LINEAR DIMENSIONS ARE IN:

MILLIMETERS

TOLERANCES:

ANGLES: ±2°

DEFAULT LINEAR TOLERANCES SEE TABLE

DIM. & TOL. PER ASME Y14.5M-1994;

DRM PER MIL-DTL-31000;

LEGENDS:

=FLAG NOTE CALL OUT

REFERENCE ONLY

SPECIFICATIONS

MATERIAL SPEC.

SEE NOTES 2

PROCESS SPEC.

--

POS

QTY

PART NUMBER

DESCRIPTION

NOTE

APPROVALS

DATE


PREPARED BY JUSTIN LI

ENGINEER IN CHARGE TYLER QIU

DESIGN MANAGER TYLER QIU

DESIGN ACTIVITY GROUP

THIRD ANGLE PROJECTION



上海良速电子有限公司

Powermax

12pin dual vertical male SMT

DOCUMENT NO. PM-MV12201

SCALE:

SHEET 1 OF 1