
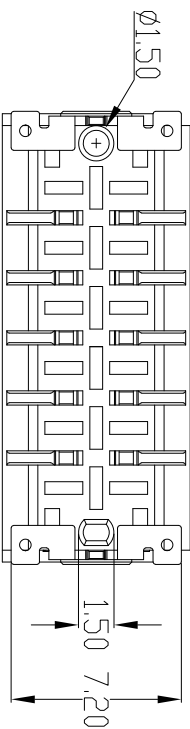
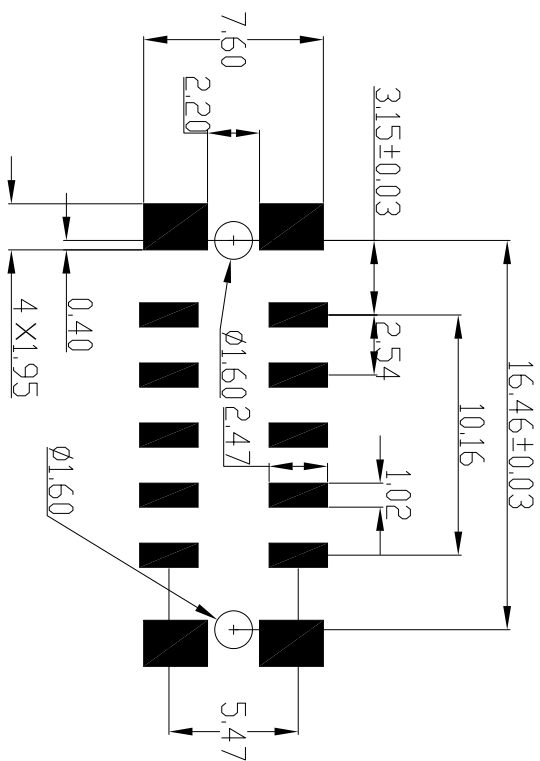
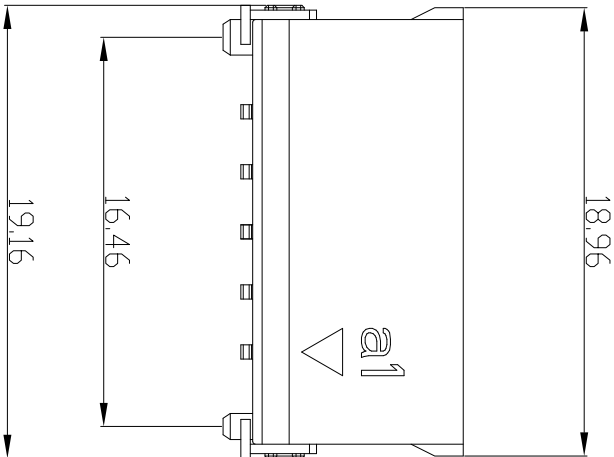
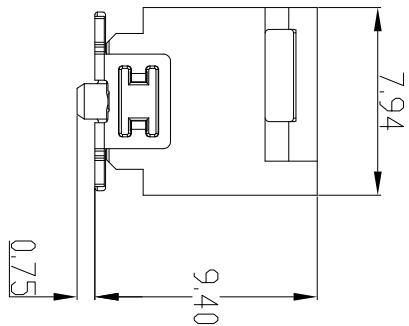
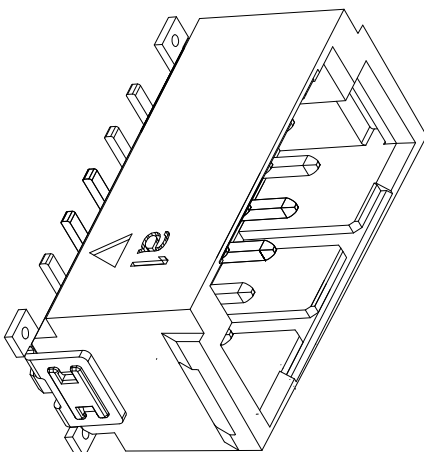


GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE

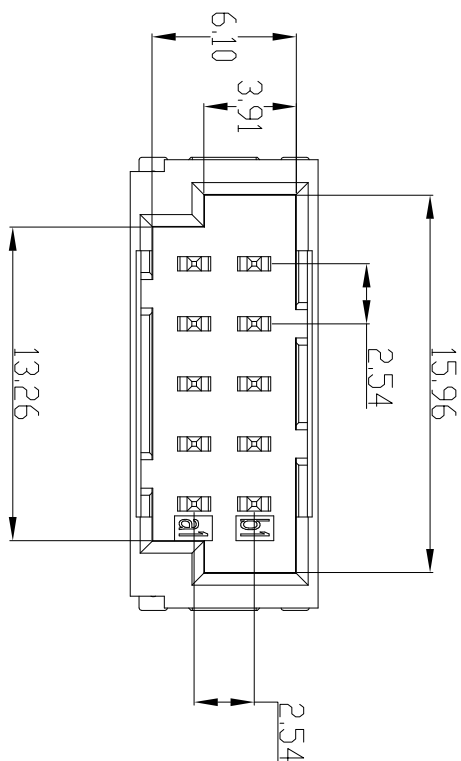

RECOMMENDED PCB-LAYOUT

- NOTES:
1. THE PRODUCTS ARE ROHS COMPLIANCE.
 2. MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MAING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 3. COPPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE					
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Powermax 10pin dual vertical male SMT U											
				SEE NOTES 2													
				APPROVALS										DATE			
				PREPARED BY ENGINEER IN CHARGE TYLER QIU										2020/6/1			
				DESIGN MANAGER TYLER QIU													
				PROCESS SPEC.		THIRD ANGLE PROJECTION											
LEGENDS: △=FLAG NOTE CALL OUT REFERENCE ONLY				--						SIZE c				DOCUMENT NO. PM-MV10201		REV/ B	
						SCALE:				REF.		SHEET 1 OF 1					