
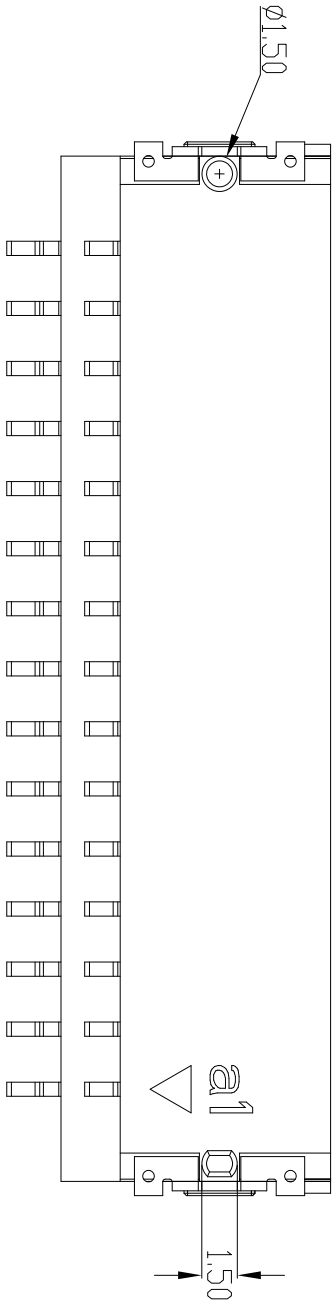
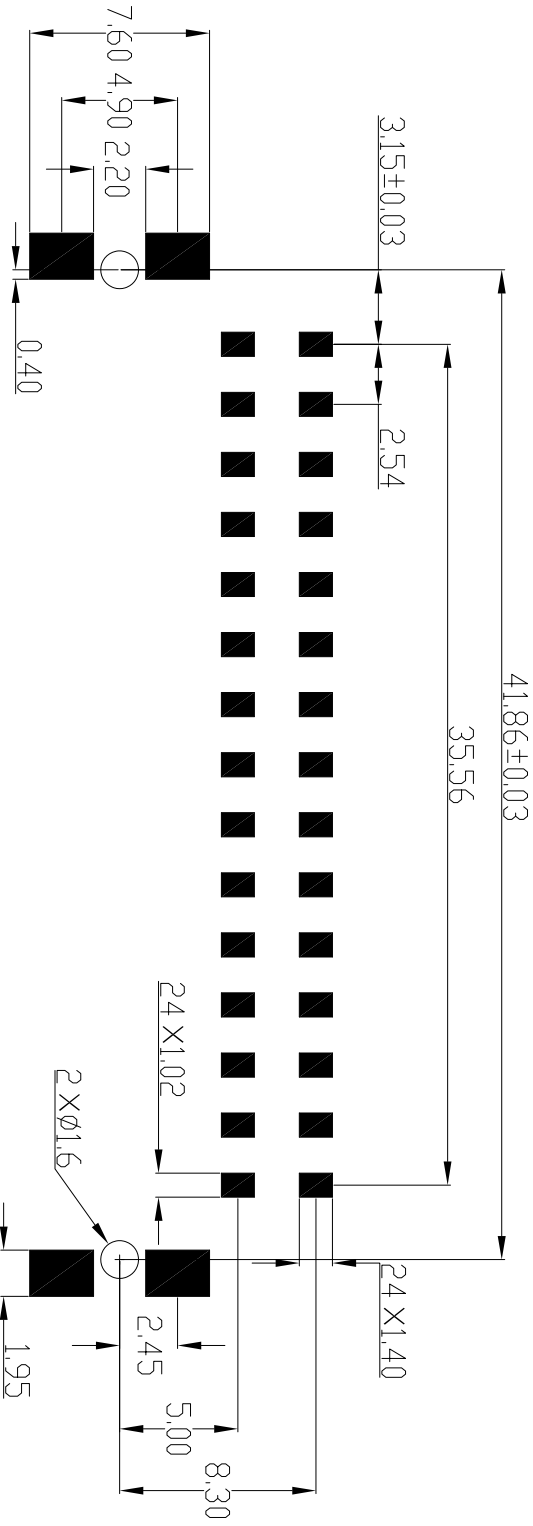
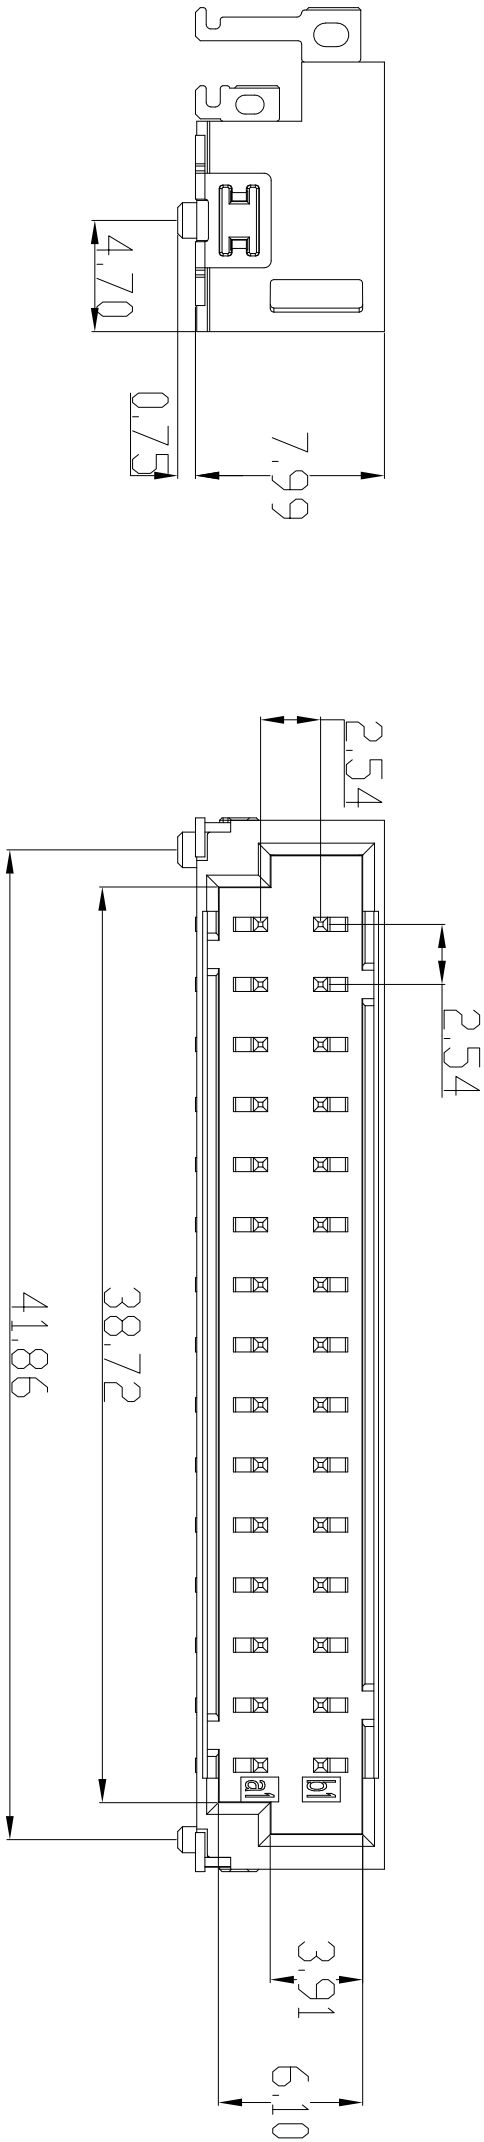



GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE

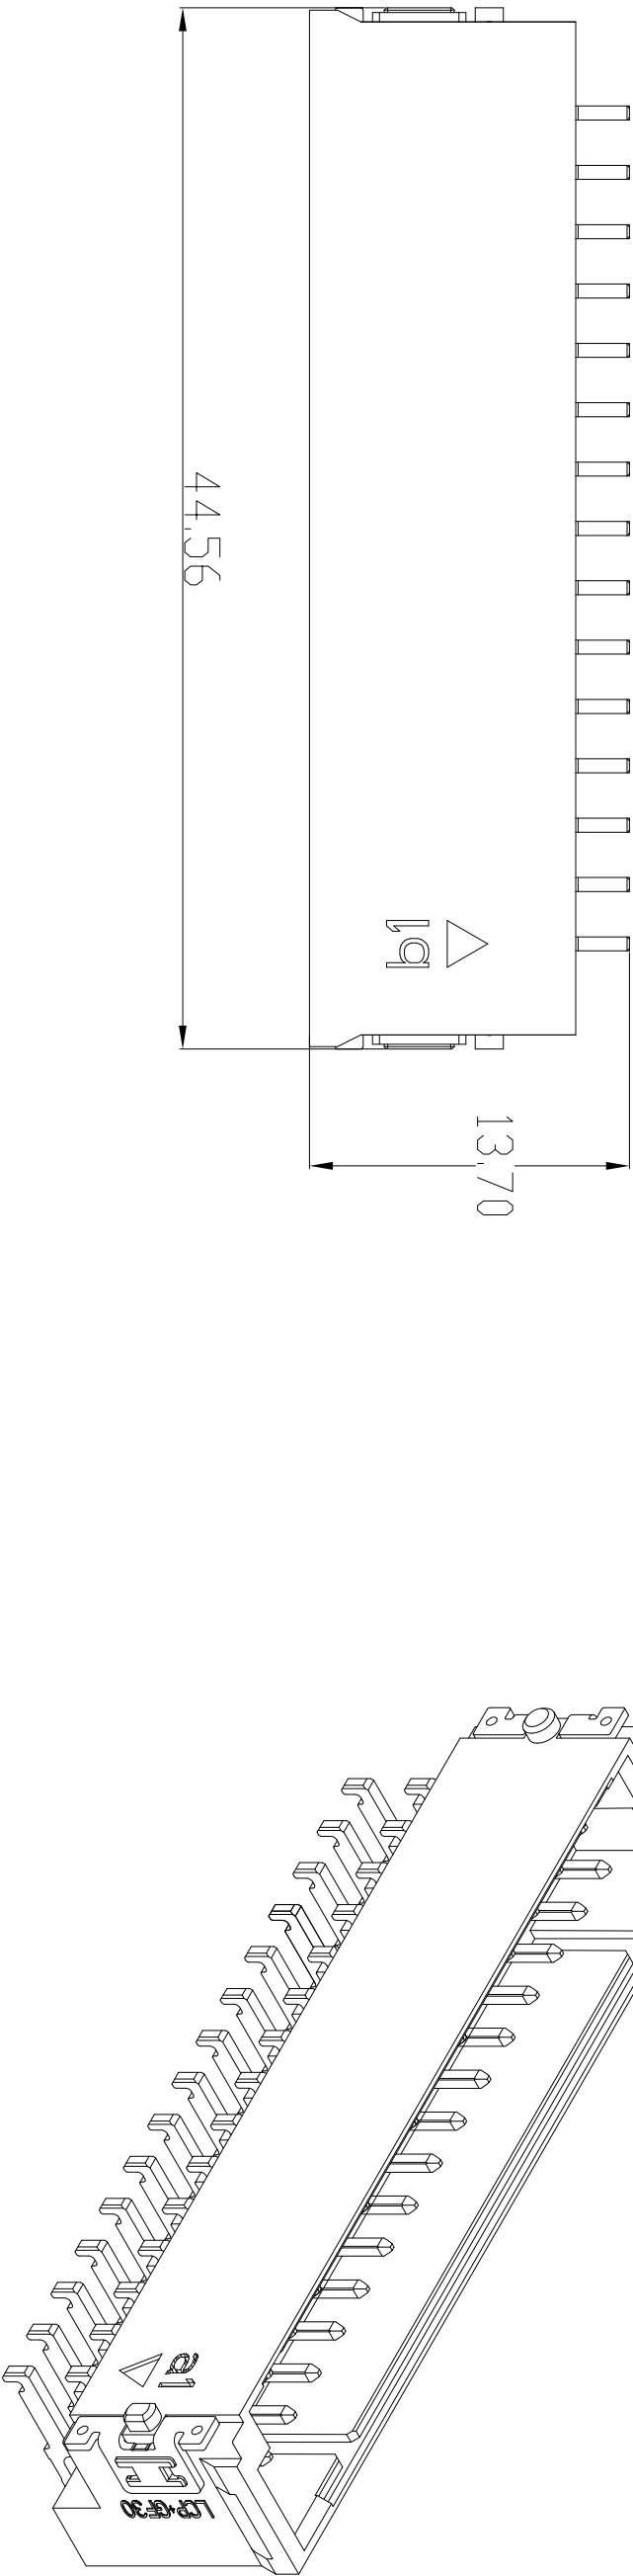

RECOMMENDED PCB-LAYOUT

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY	PART NUMBER	DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		MATERIAL SPEC. SEE NOTES 2		APPROVALS		DATE		上海良速电子有限公司 Powermax 30pin dual row RA male SMT connector U		
				PREPARED BY ENGINEER IN CHARGE TYLER QIU		28/05/6				
				DESIGN MANAGER TYLER QIU						
		PROCESS SPEC.		DESIGN ACTIVITY GROUP						
LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY		--		THIRD ANGLE PROJECTION		SIZE c		DOCUMENT NO. PM-MA30201		REV/ A
						SCALE:		REF.		SHEET 1 OF 1

- NOTES:
1. THE PRODUCTS ARE ROHS COMPLIANCE.
 2. MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MAING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 3. COPPLANARITY AREA OF TERMINATION ≤0.1mm.