

4






3

2


GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING


REVISIONS		
REV	DESCRIPTION	DATE

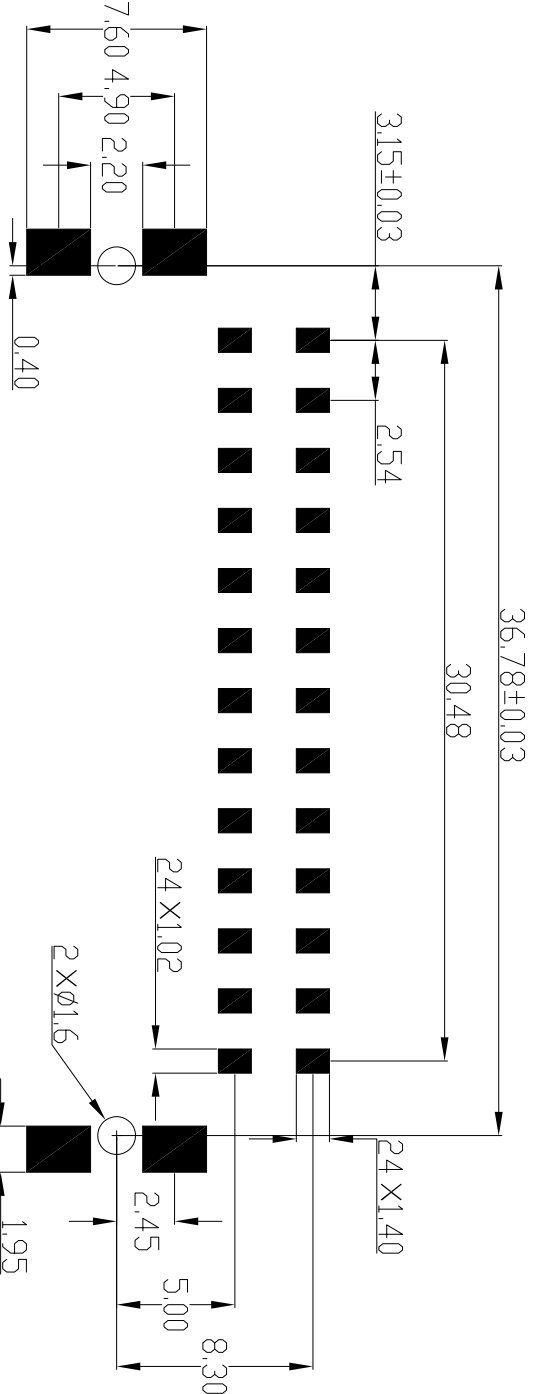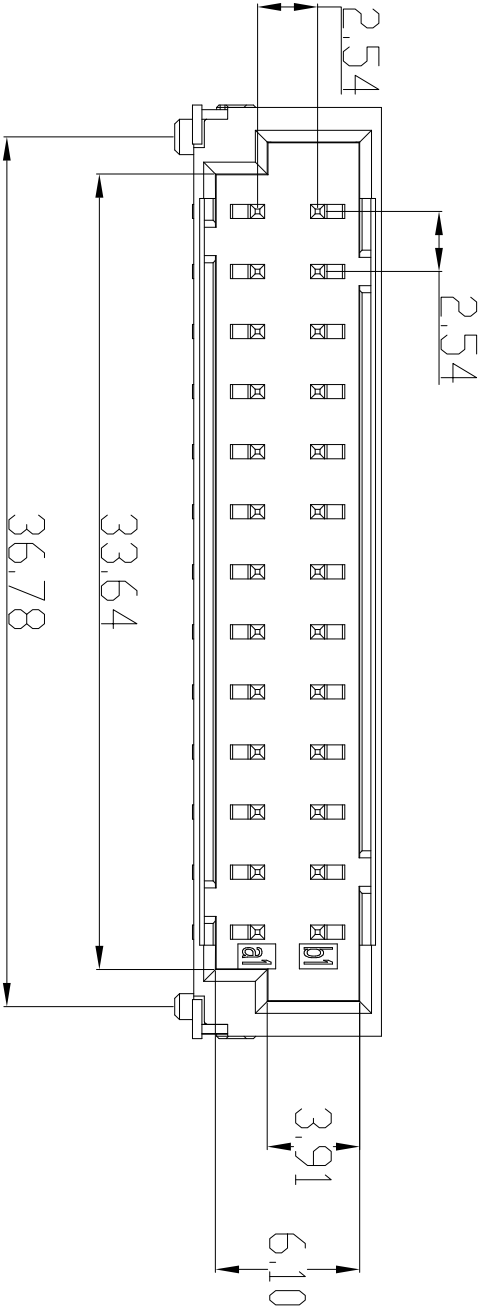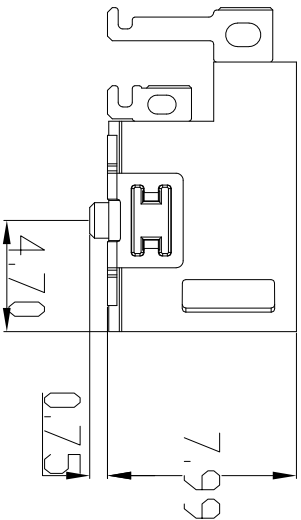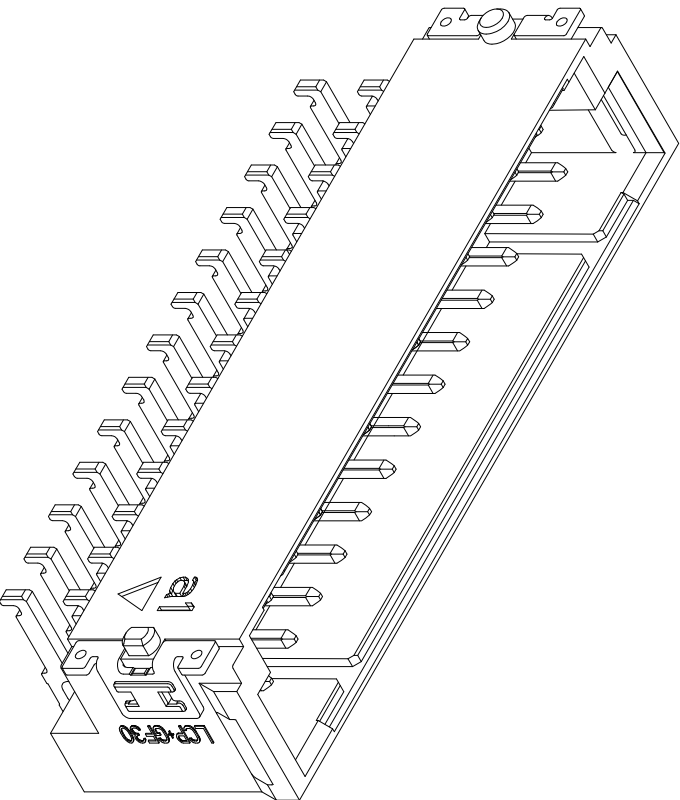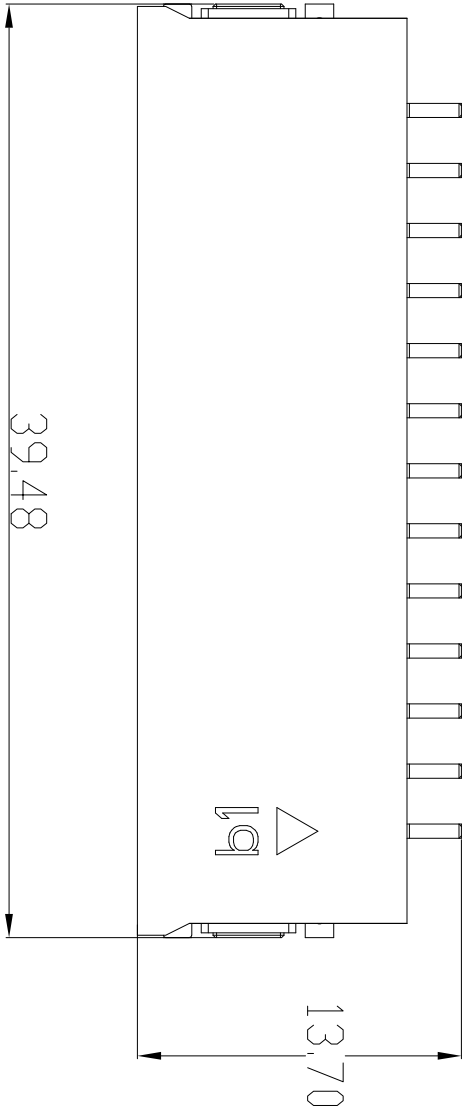

RECOMMENDED PCB-LAYOUT

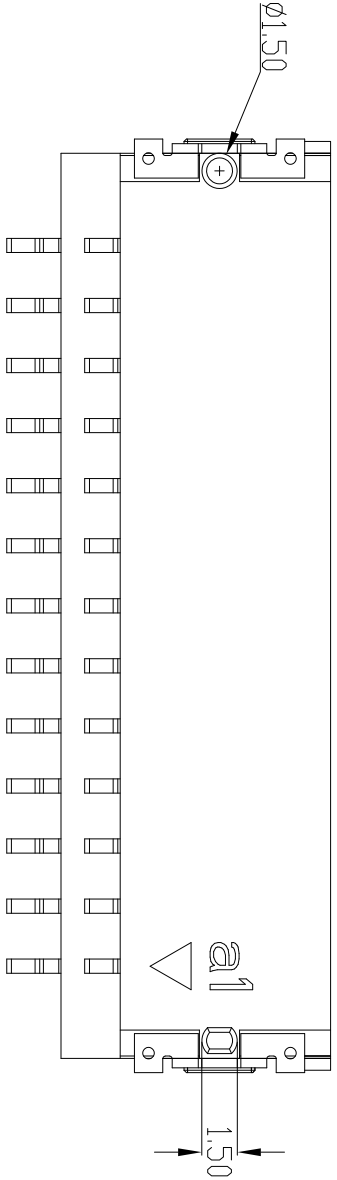

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DPM PER MIL-DTL-31000;		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powermax 26pin dual row RA male SMT connector	U
		SEE NOTES 2		PREPARED BY	JUSTIN LI			
		PROCESS SPEC.		ENGINEER IN CHARGE	TYLER QIU	2020/5/6		
				DESIGN MANAGER	TYLER QIU			
LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY		--		THIRD ANGLE PROJECTION				
		SIZE		DOCUMENT NO.		REF.	PM-MA26201	REV
		C						A
		SCALE:						SHEET 1 OF 1

2

3

4

1