

4






3

2


GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING


REVISIONS			
REV	DESCRIPTION	DATE	

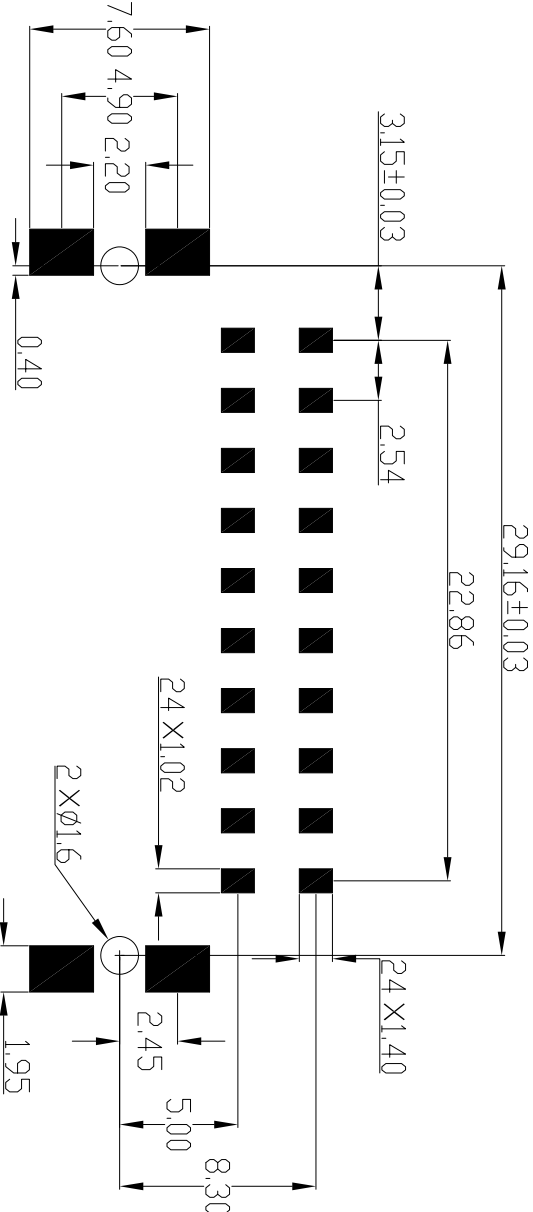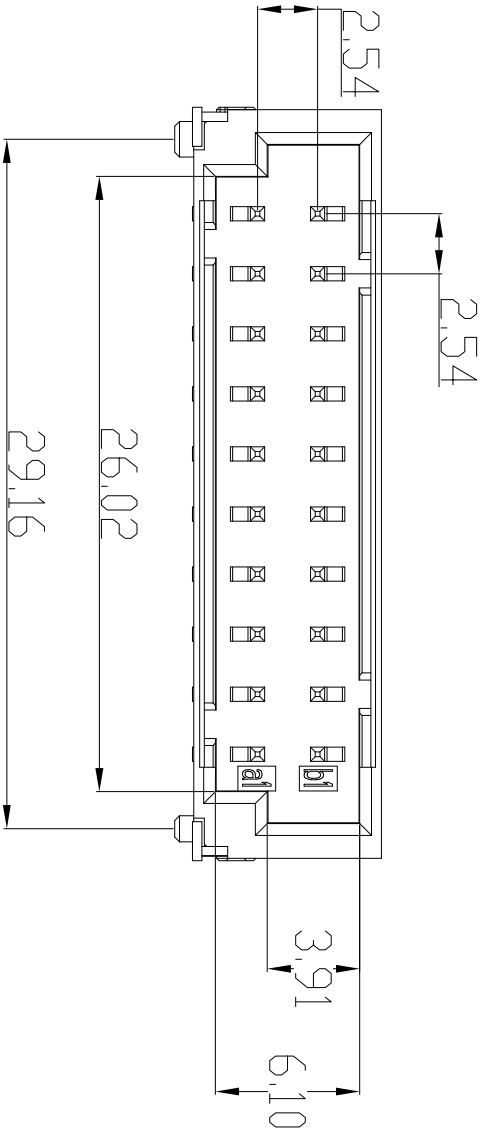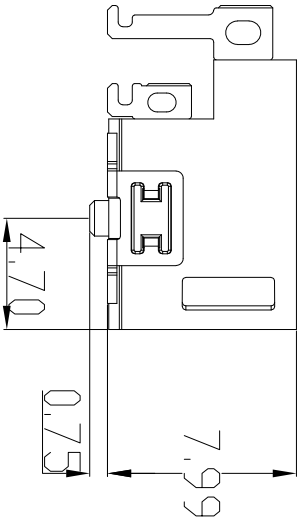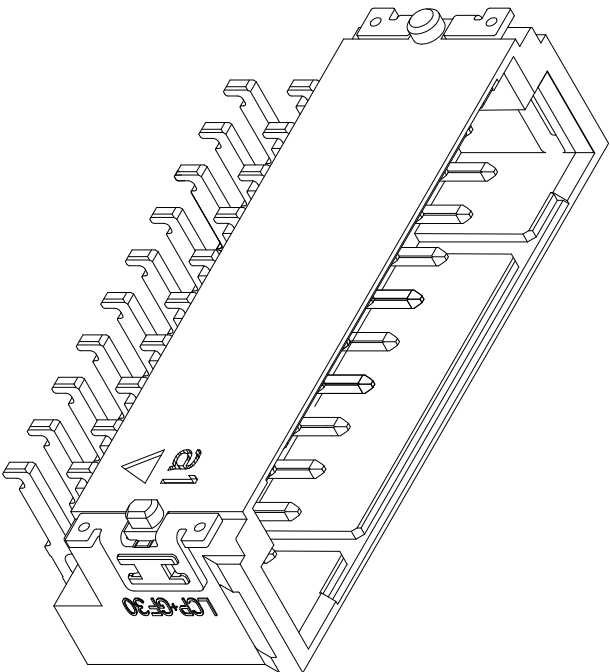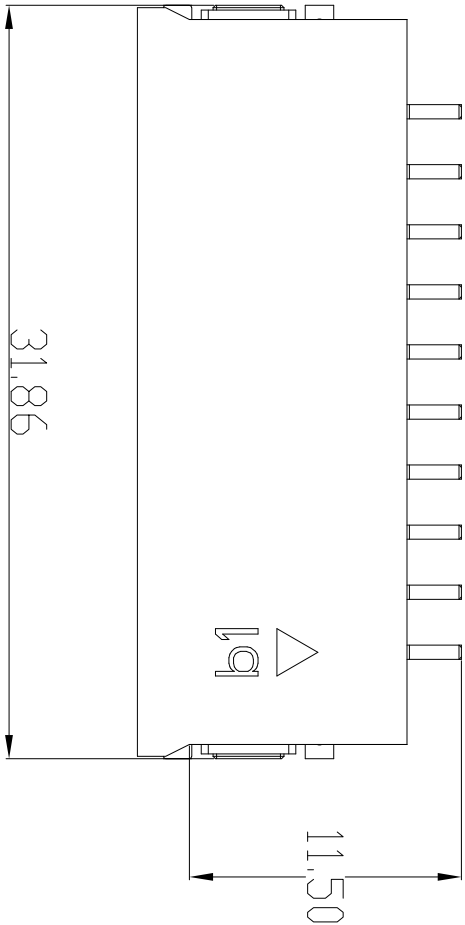

RECOMMENDED PCB-LAYOUT

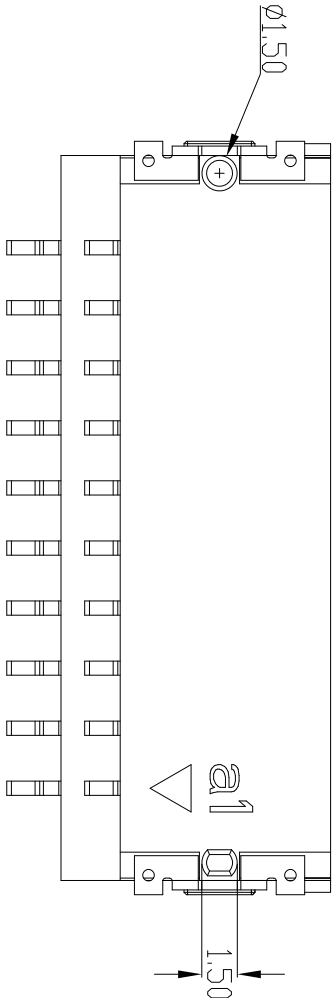

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
 - COPLANARITY AREA OF TERMINATION ≤0.1mm.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DPM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powermax 20pin dual row RA male SMT connector			
		SEE NOTES 2								
		PROCESS SPEC.		ENGINEER JUSTIN LI		2020/5/6				
		--		DESIGN MANAGER TYLER QIU		THIRD ANGLE PROJECTION				
		THIRD ANGLE PROJECTION		SCALE:		SIZE		REF.		
						C		A		
						DOCUMENT NO.		PM-MA20201		
								SHEET 1 OF 1		

4

3

2

1