

4

3

2



GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

D




CUSTOMER DRAWING

REVISIONS			
REV	DESCRIPTION	DATE	


D

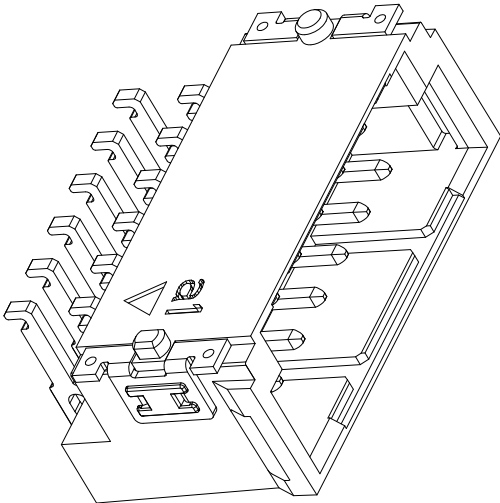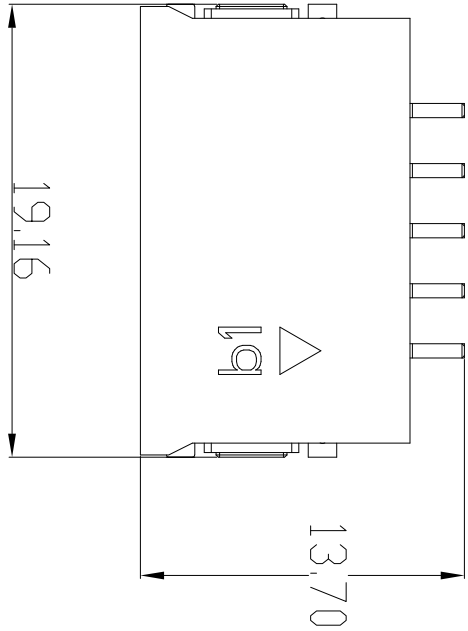

C

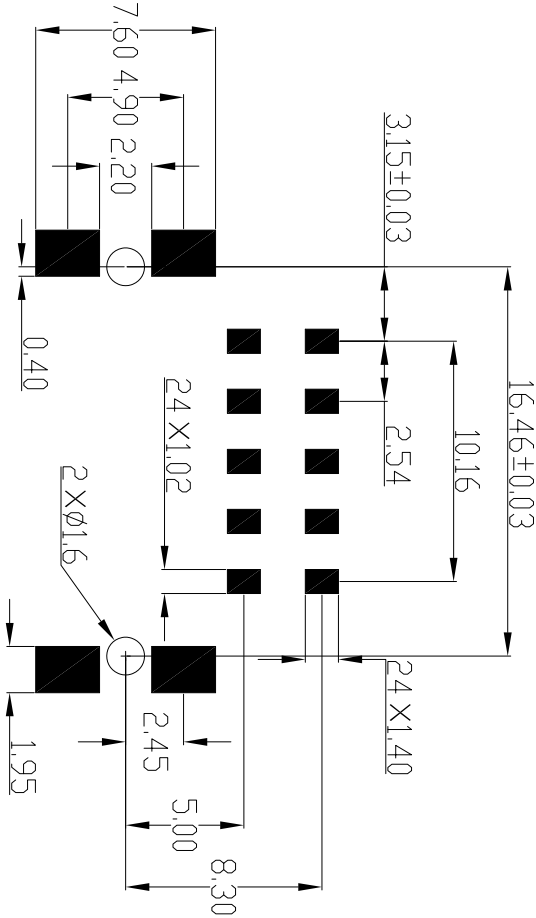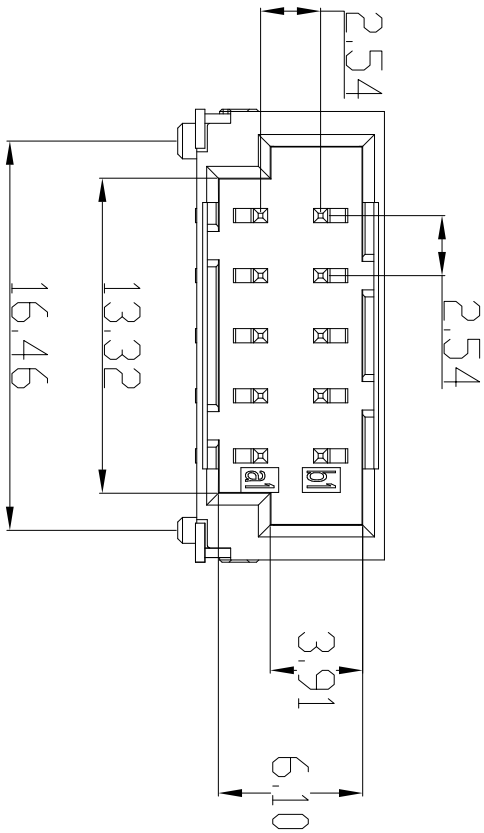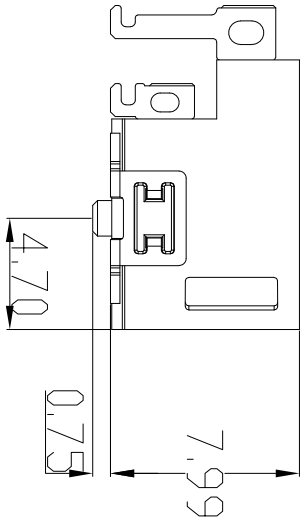

B


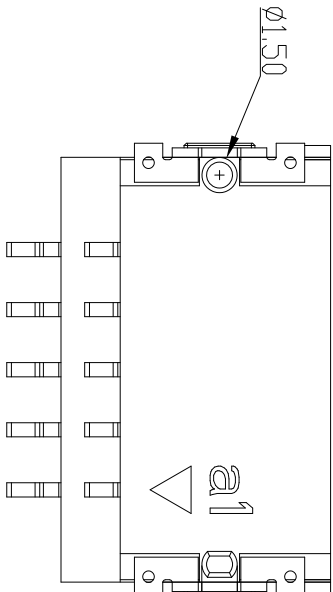


B

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC:

- HOUSING: LCP THERMOPLASTIC,UL94 V-0,BLACK COLOR.
- CONTACT: COPPER ALLOY,MATING AREA GOLD PLATING,OTHER AREA TIN PLATING.
- COPLANARITY AREA OF TERMINATION ≤0.1mm.

A

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000;		MATERIAL SPEC.		APPROVALS PREPARED BY JUSTIN LI ENGINEER IN CHARGE TYLER QIU DESIGN MANAGER TYLER QIU DESIGN ACTIVITY GROUP 2020/5/6		THIRD ANGLE PROJECTION  		10pin dual row RA male SMT connector		U
		SEE NOTES 2								
		PROCESS SPEC.								
		--								
LEGENDS:  =FLAG NOTE CALL OUT REFERENCE ONLY										