

4






3

2

GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS			
REV	DESCRIPTION	DATE	
A	First release	2020-05-06	

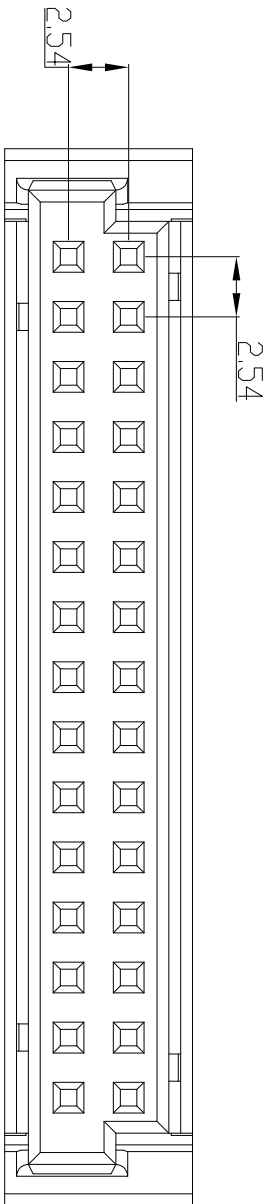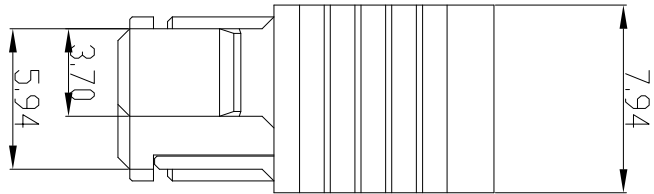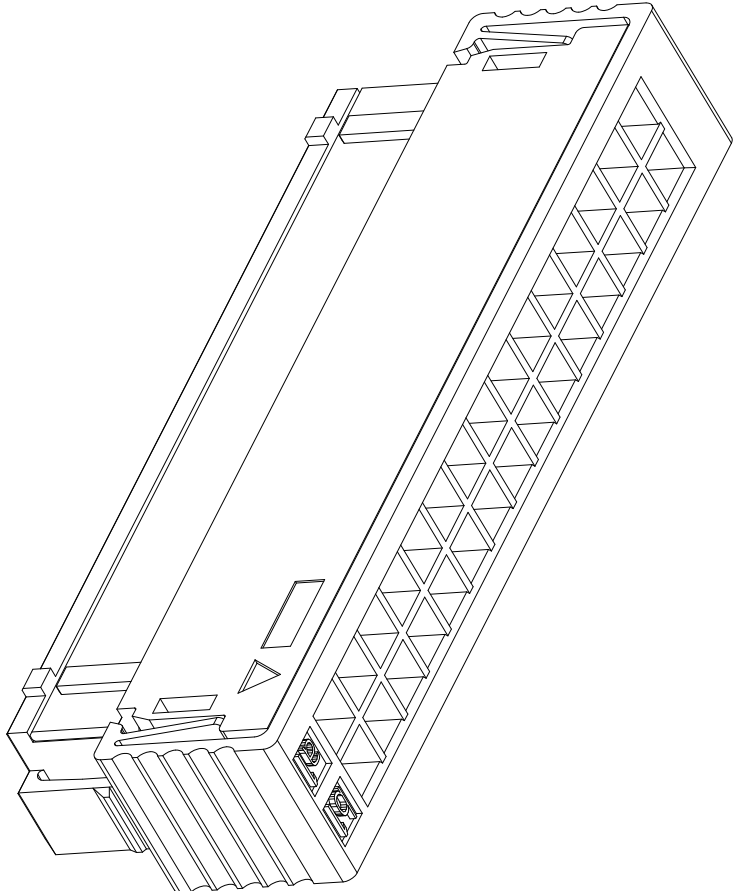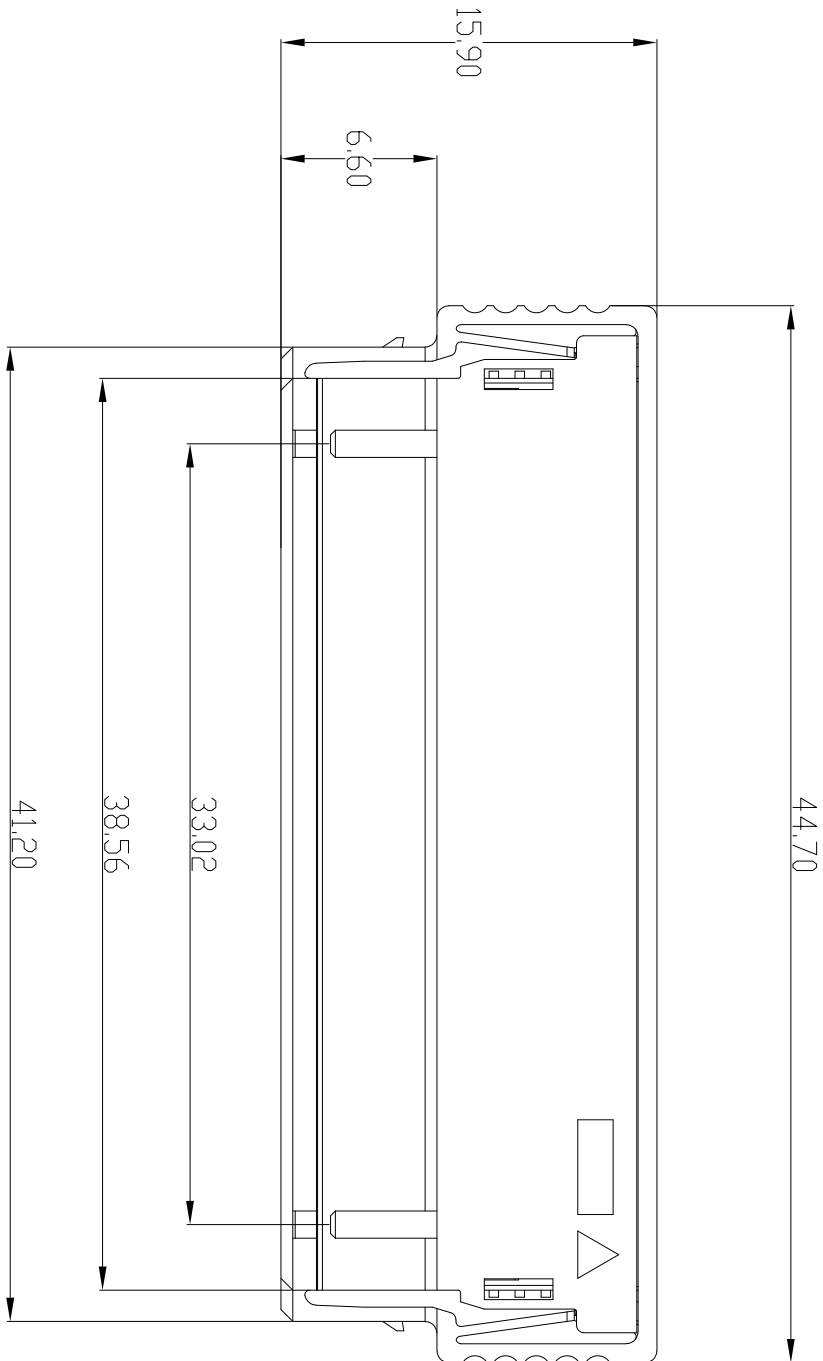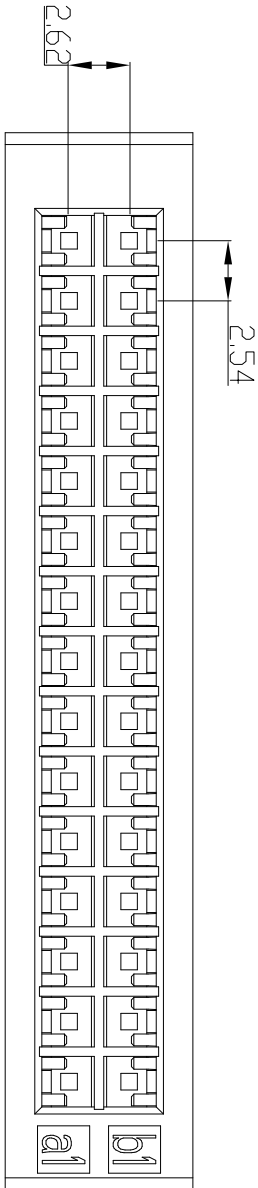

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE		
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		MATERIAL SPEC. SEE NOTES 2	APPROVALS	DATE	上海良速电子有限公司 Powermax 30pin dual row Female connector U					
			PREPARED BY ENGINEER IN CHARGE DESIGN MANAGER DESIGN ACTIVITY GROUP	JUSTIN LI TYLER QIU TYLER QIU 2020/5/6						
		PROCESS SPEC.	THIRD ANGLE PROJECTION							
LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY		--								
			SIZE	DOCUMENT NO.	REV.	SCALE:			REF.	SHEET 1 OF 1
			C	PM-FS30201	A					

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC: PA THERMOPLASTIC,UL94 V-0,BLACK COLOR..

A

B

C

D

4

3

2

1