
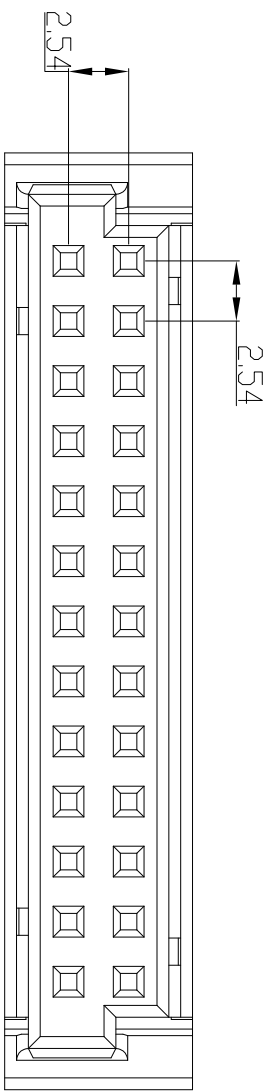
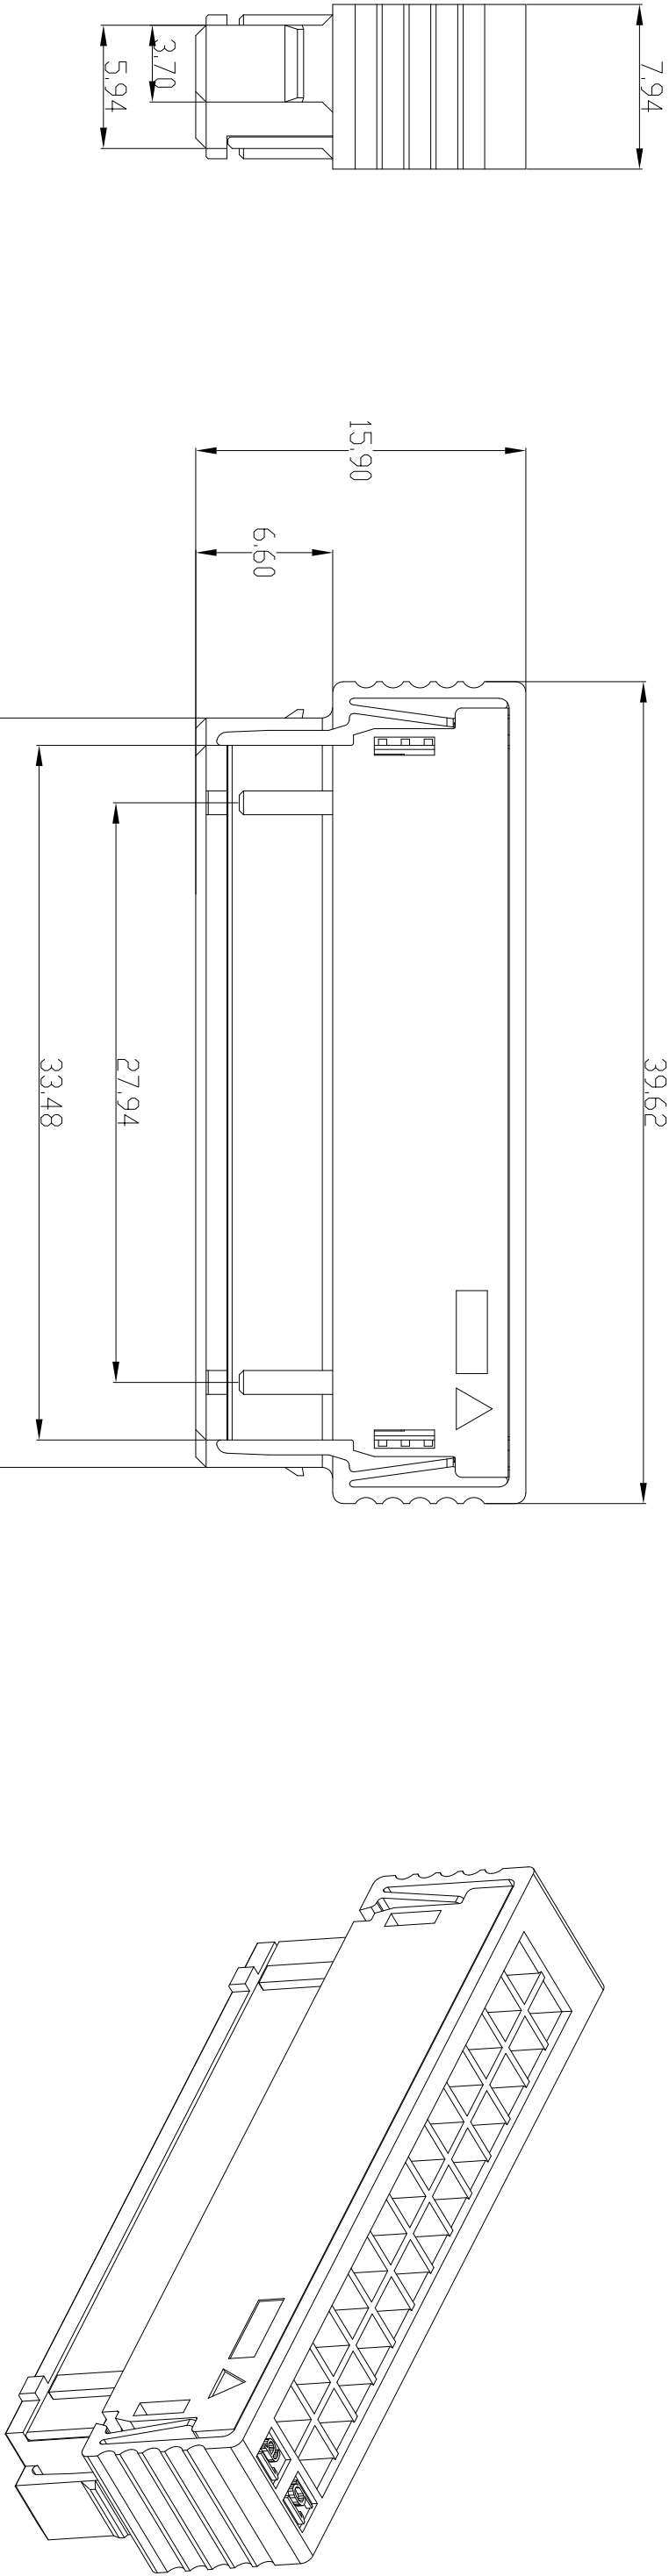


GENERAL TOLERANCE						
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020-05-06

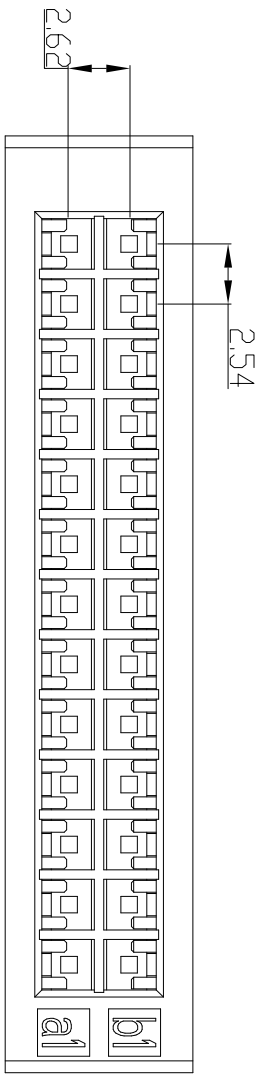

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS		QTY		PART NUMBER		DESCRIPTION		NOTE	
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				MATERIAL SPEC.		SEE NOTES 2		APPROVALS		DATE		上海良速电子有限公司 Powermax 26pin dual row Female connector U	
				PROCESS SPEC.		THIRD ANGLE PROJECTION		DESIGN ACTIVITY GROUP		2620/5/6			
						DESIGN MANAGER		TYLER QIU					
						ENGINEER IN CHARGE		JUSTIN LI					
						PREPARED BY		TYLER QIU					
				SCALE:		REF.		SHEET 1 OF 1					

A

H

4

(2)

2