

4

3

2




GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

D

CUSTOMER DRAWING

REVISIONS			
REV	DESCRIPTION	DATE	
A	First release	2020-05-06	

D

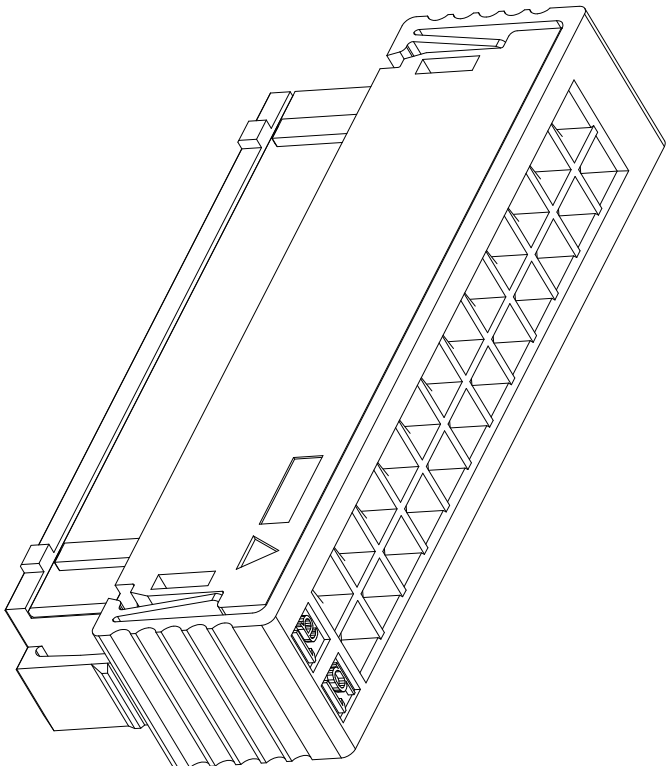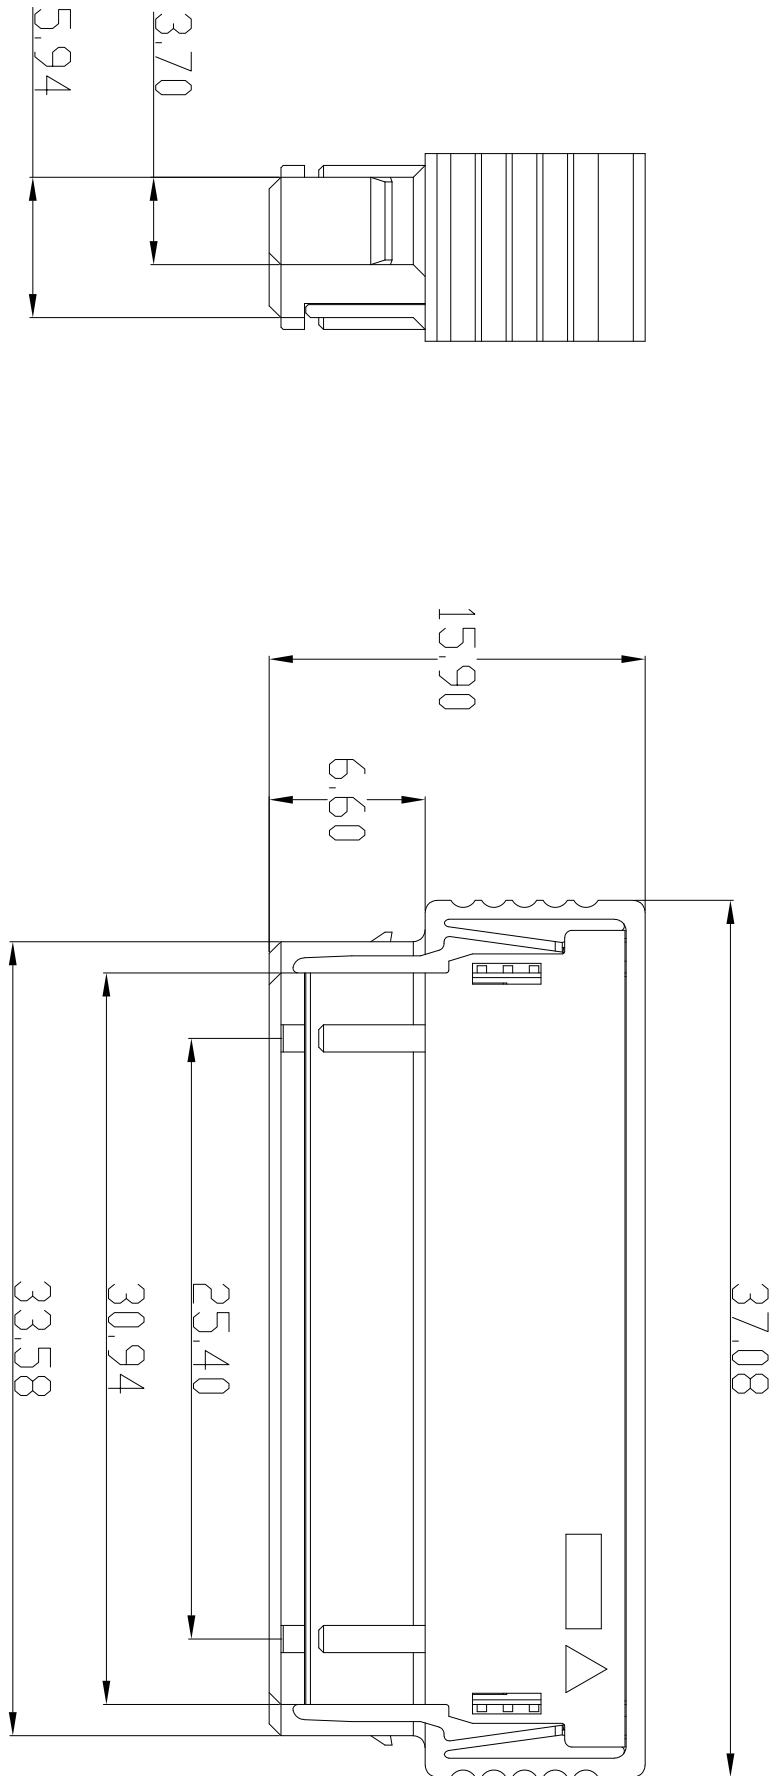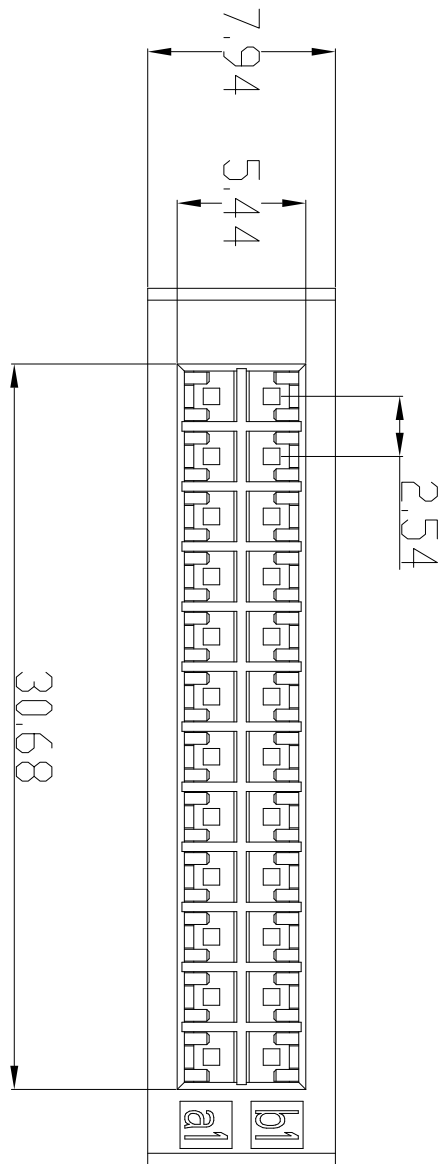


C

C


B

B

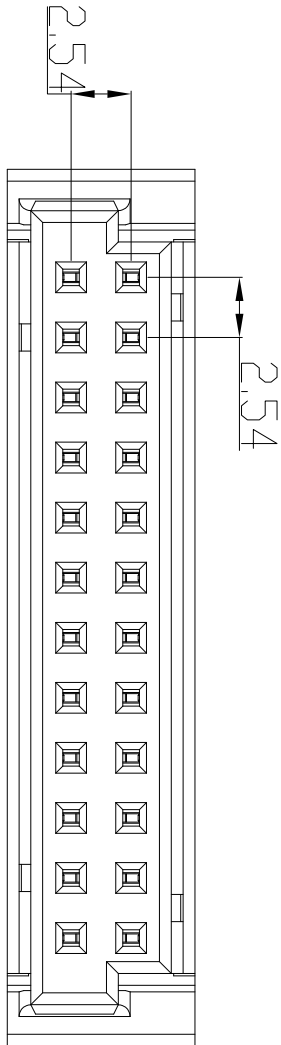

A

A

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Powermax 24pin dual row Female connector U		
				SEE NOTES 2				
				PROCESS SPEC.				
				--				
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				APPROVALS PREPARED BY ENGINEER IN CHARGE DESIGN MANAGER DESIGN ACTIVITY GROUP DATE 2020/5/6		SIZE C DOCUMENT NO. PM-FSS24201 REV/ A		
THIRD ANGLE PROJECTION		SCALE:						
		REF.						
		SHEET 1 OF 1						