

4

3





2

1

GENERAL TOLERANCE							SURFACE FINISH
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400		
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020-05-06

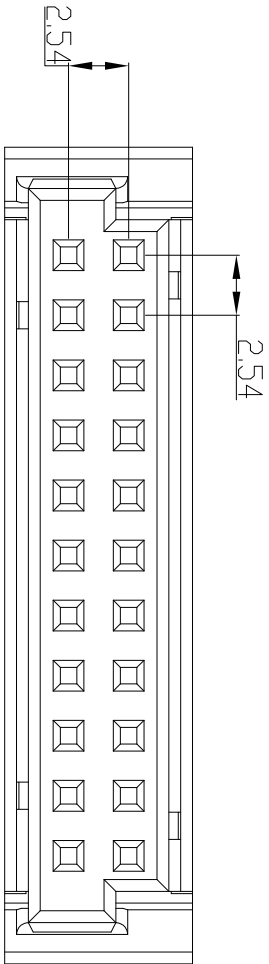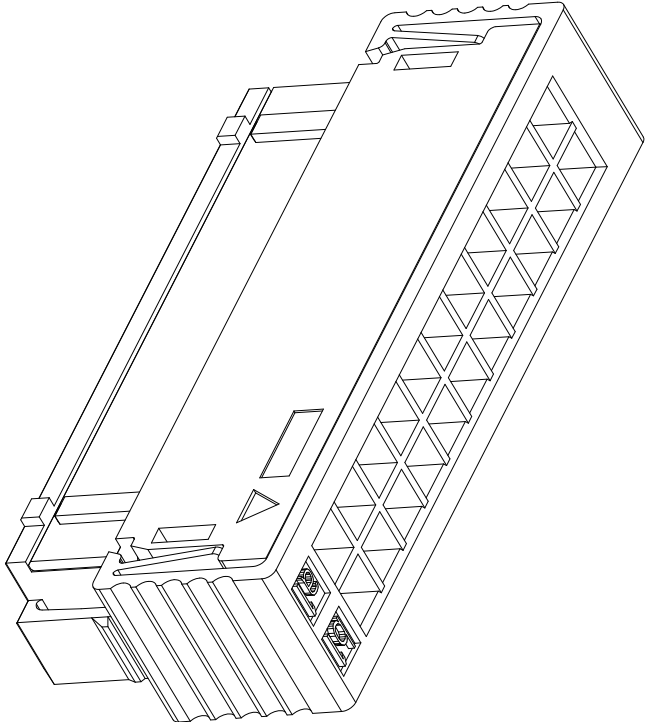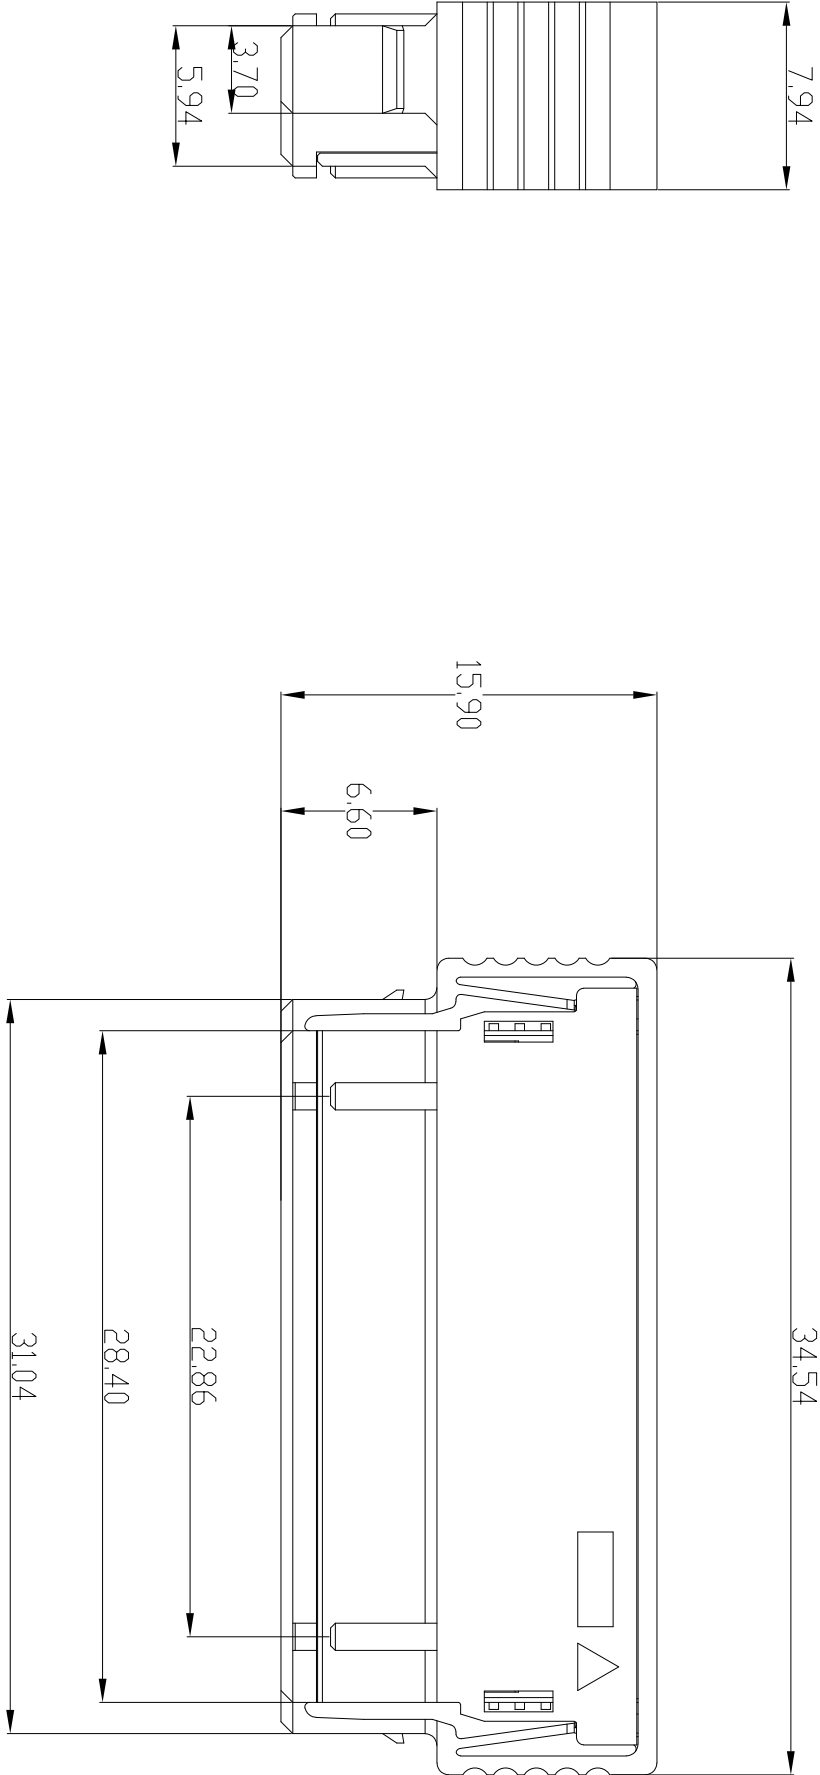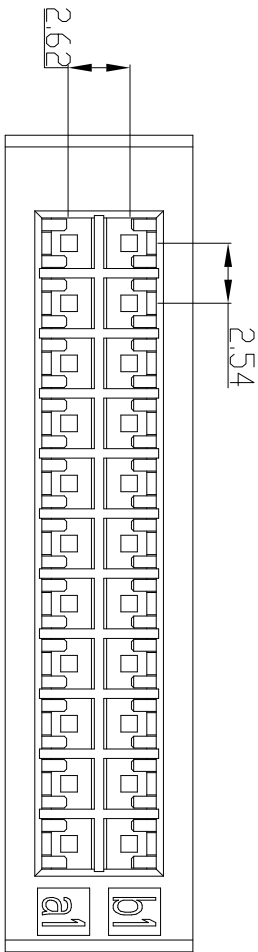

UNLESS OTHERWISE SPECIFIED		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
----------------------------	--	-----	-----	-------------	-------------	------

SPECIFICATIONS

MATERIAL SPEC.

SEE NOTES 2

MILLIMETERS

TOLERANCES:

ANGLES: ±2°

DEFAULT LINEAR TOLERANCES SEE TABLE

DIM. & TOL. PER ASME Y14.5M-1994;


DRM PER MIL-DTL-31000;

LEGENDS:

=FLAG NOTE CALL OUT
REFERENCE ONLY

APPROVALS		DATE
PREPARED BY	JUSTIN LI	
ENGINEER IN CHARGE	TYLER QIU	
DESIGN MANAGER	TYLER QIU	2020/5/6
DESIGN ACTIVITY GROUP		

THIRD ANGLE PROJECTION



上海良速电子有限公司

Powermax

22pin dual row Female connector

SIZE	DOCUMENT NO.	REV.
C	PM-FS22201	A
SCALE:	REF.	SHEET 1 OF 1

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC: PA THERMOPLASTIC,UL94 V-0,BLACK COLOR..

4

3

2

1