

4

3

2


GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

D


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020-05-06


D

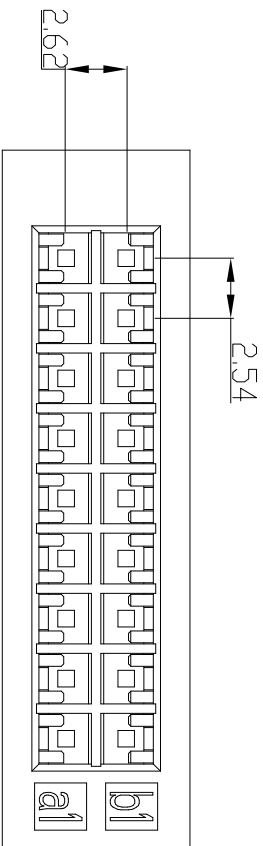


C

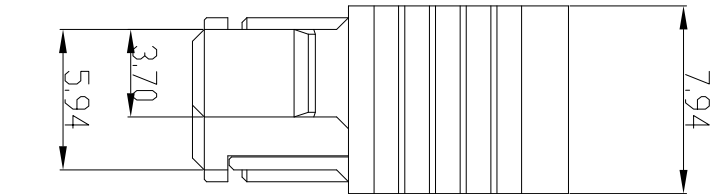


29.46

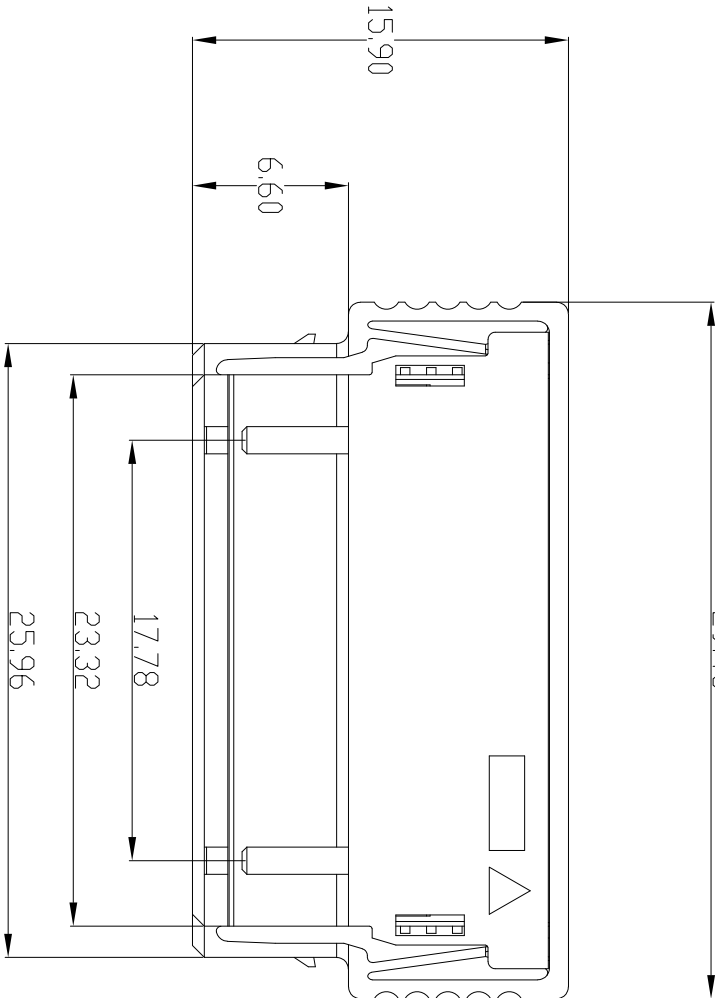

C

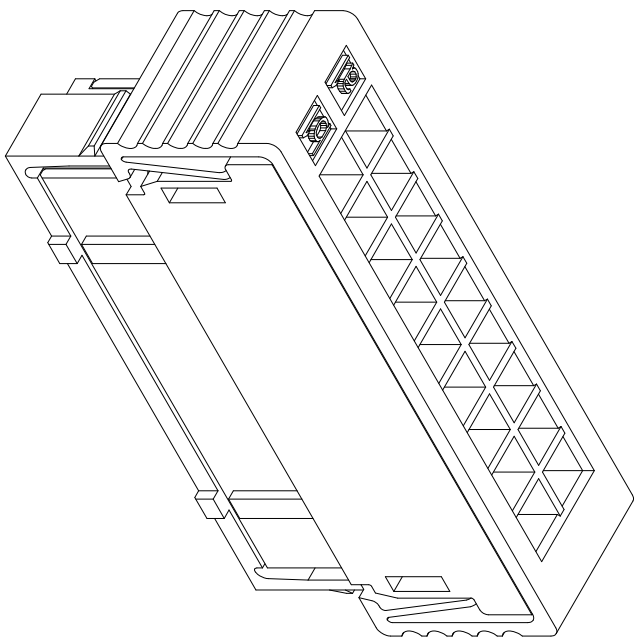

B

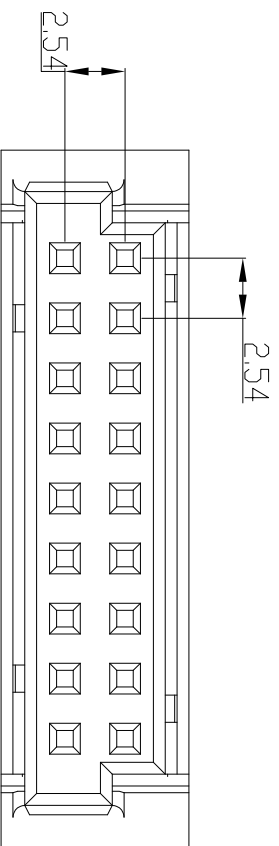

B


A

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC: PA THERMOPLASTIC,UL94 V-0,BLACK COLOR..

3

2

1

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Powermax 18pin dual row Female connector U				
				SEE NOTES 2						
				PROCESS SPEC.						
				--						
				THIRD ANGLE PROJECTION						
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY				APPROVALS		DATE				
PREPARED BY		JUSTIN LI		2020/5/6						
ENGINEER IN CHARGE		TYLER QIU								
DESIGN MANAGER		TYLER QIU								
DESIGN ACTIVITY GROUP										
										
SIZE		DOCUMENT NO.		REF.		SHEET 1 OF 1				
C		PM-FS18201		A						