

4






3

2

GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020-05-06

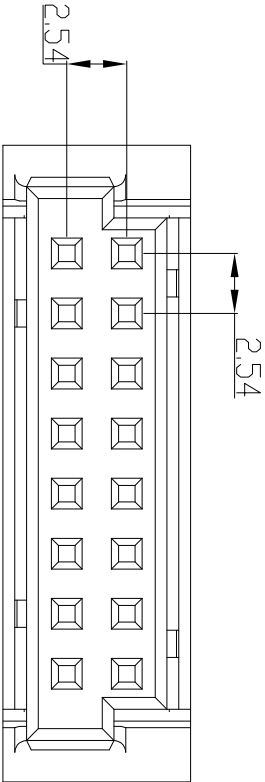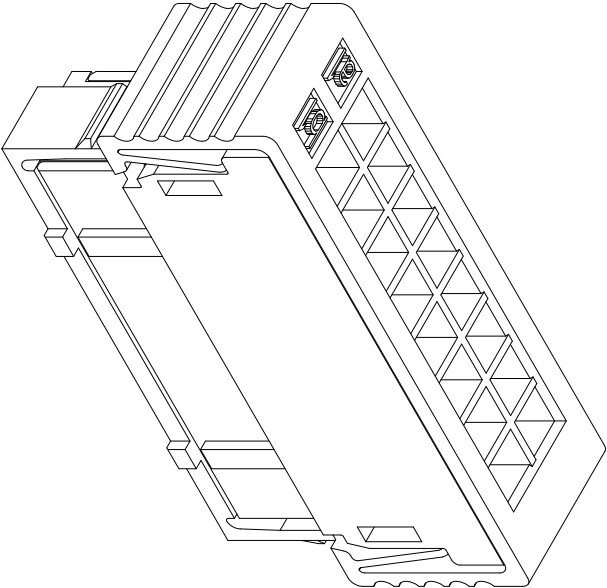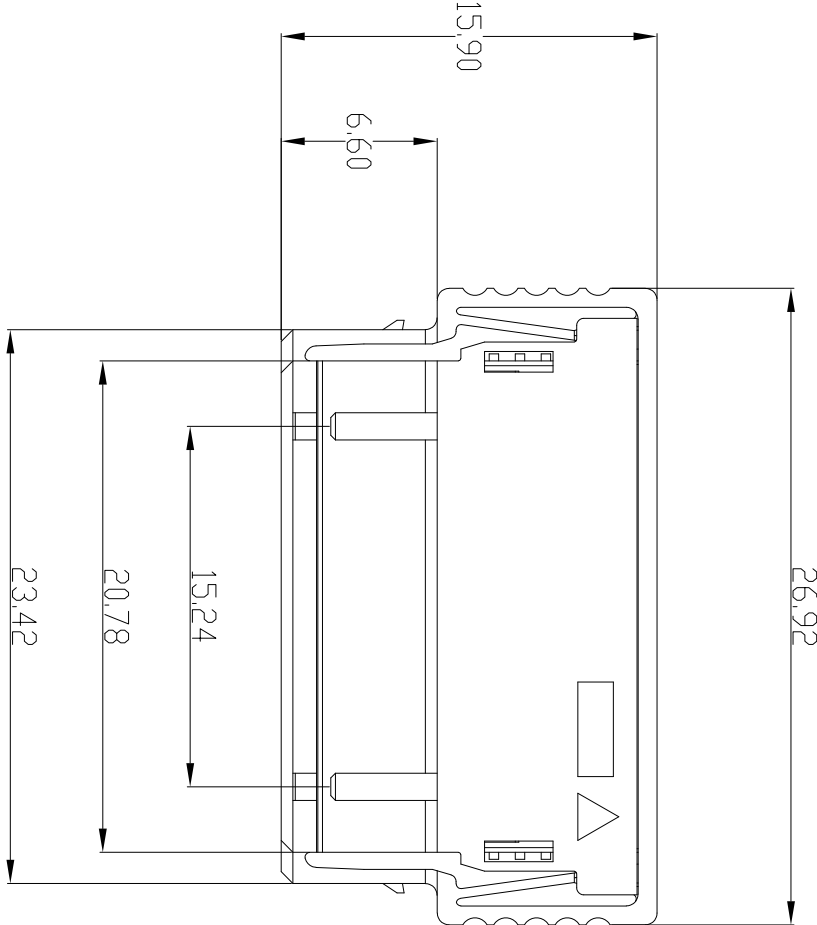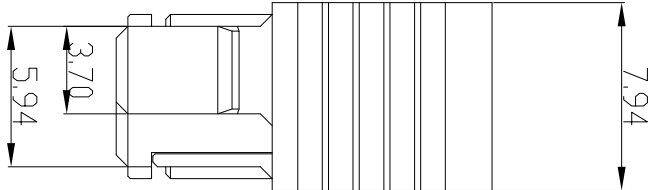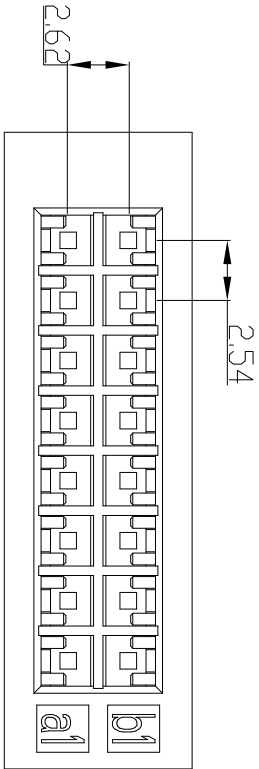

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC: PA THERMOPLASTIC,UL94 V-0,BLACK COLOR..

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS		MATERIAL SPEC. SEE NOTES 2		APPROVALS		DATE	上海良速电子有限公司 Powermax 16pin dual row Female connector	
TOLERANCES:		ANGLES: ±2°		PREPARED BY	JUSTIN LI			
DEFAULT LINEAR TOLERANCES SEE TABLE		DESIGN MANAGER		ENGINEER IN CHARGE	TYLER QIU	2020/5/6		
DIM. & TOL. PER ASME Y14.5M-1994;		PROCESS SPEC.		DESIGN ACTIVITY GROUP	TYLER QIU			
DRM PER MIL-DTL-31000;		--		THIRD ANGLE PROJECTION			SIZE C DOCUMENT NO PM-FS16201 REV A	
LEGENDS:								
=FLAG NOTE CALL OUT								
REFERENCE ONLY							SCALE:	
							REF.	
							SHEET 1 OF 1	

A

B

C

D

4

3

2

1