

4






3

2


GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020-05-06

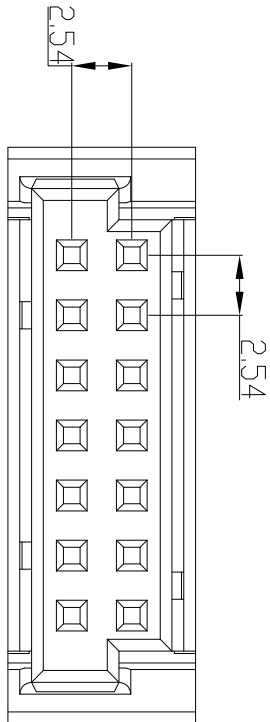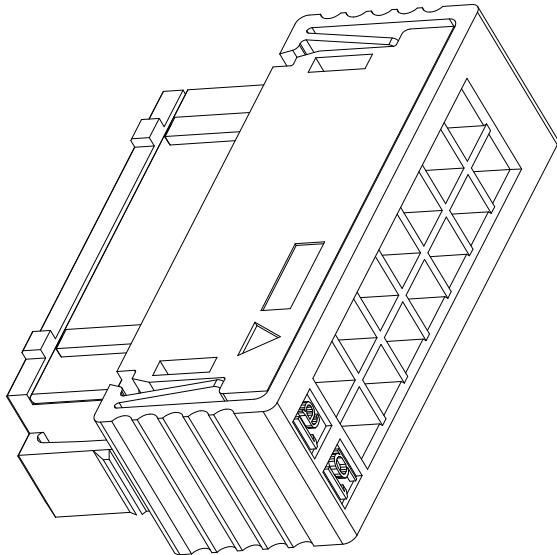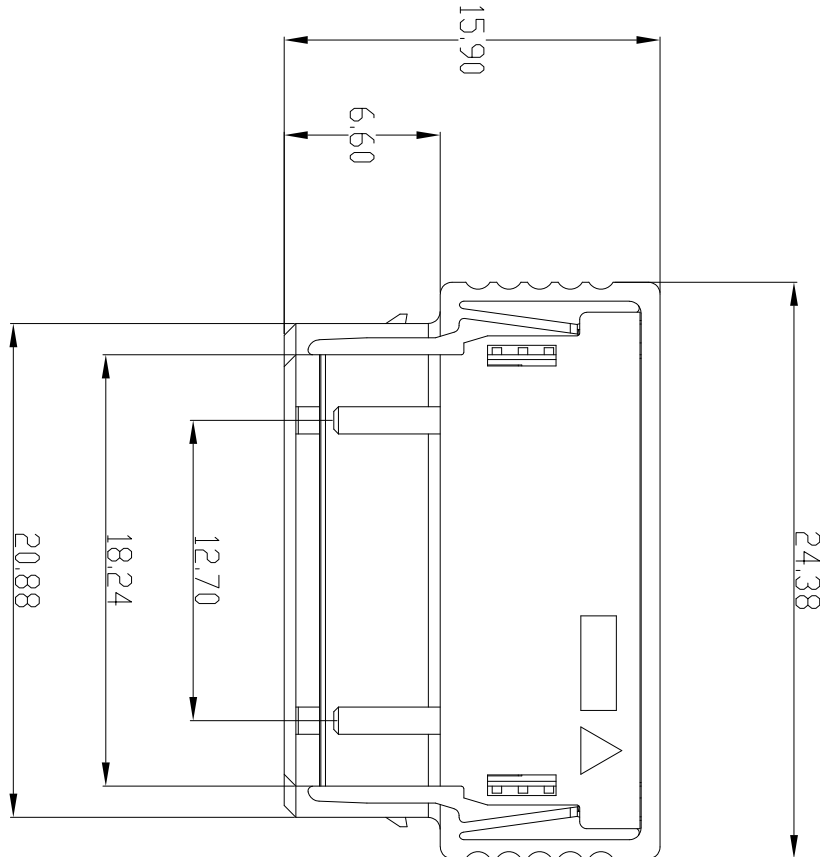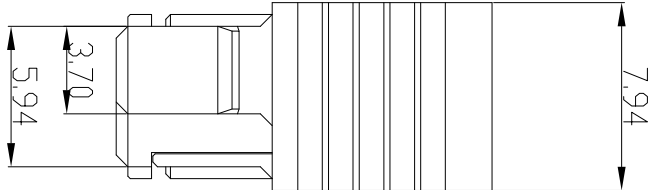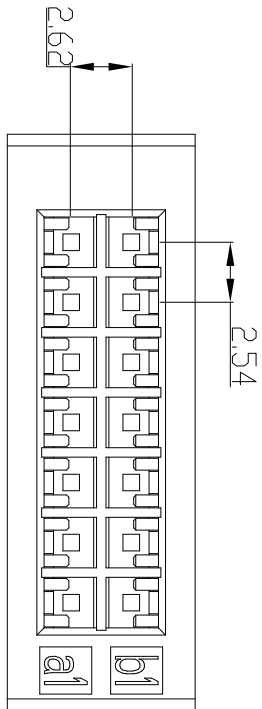

- NOTES:
- THE PRODUCTS ARE ROHS COMPLIANCE.
 - MATERIAL SPEC: PA THERMOPLASTIC,UL94 V-0,BLACK COLOR..

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;				MATERIAL SPEC.		上海良速电子有限公司 Powermax 14pin dual row Female connector U				
				SEE NOTES 2						
				PROCESS SPEC.						
				--						
				THIRD ANGLE PROJECTION						
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		APPROVALS		DATE		SIZE C DOCUMENT NO. PM-FS14201 REV. A				
		PREPARED BY JUSTIN LI		2020/5/6						
		ENGINEER TYN CHANG		TYLER QIU						
		DESIGN MANAGER TYLER QIU		DESIGN ACTIVITY GROUP						
		THIRD ANGLE PROJECTION		SCALE:						
				REF.						
				SHEET 1 OF 1						

2

3

4

A

B

C

D