

4

3

2




GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

D


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020-05-06


D

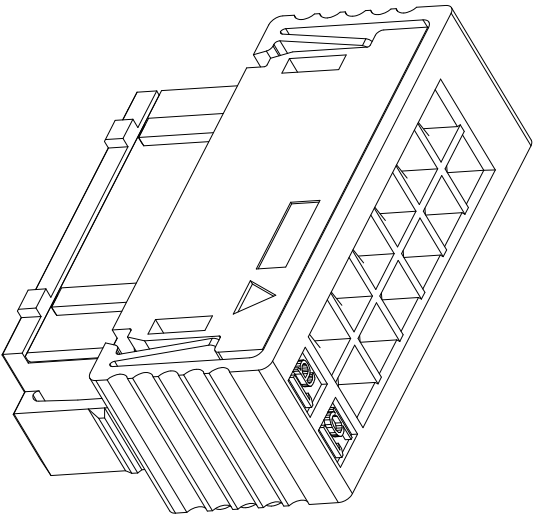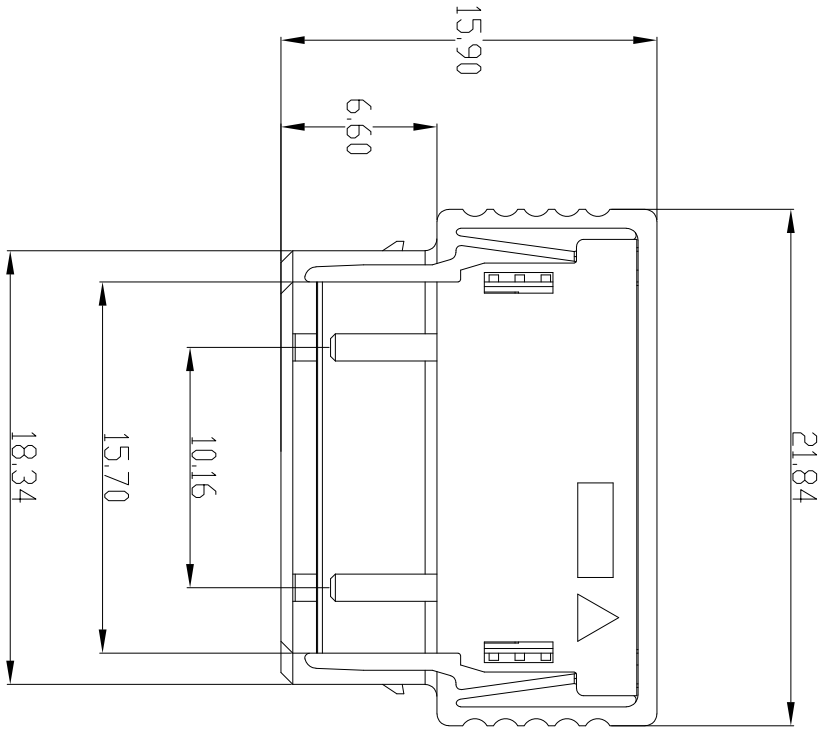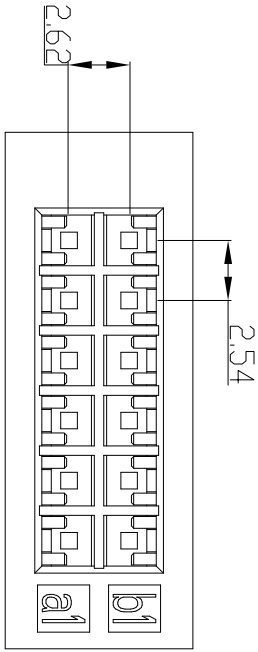

C

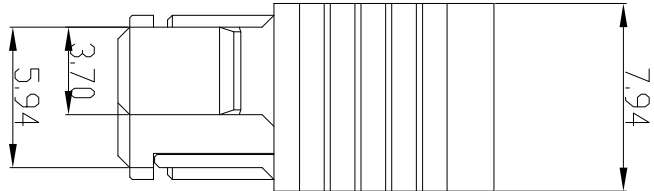


B

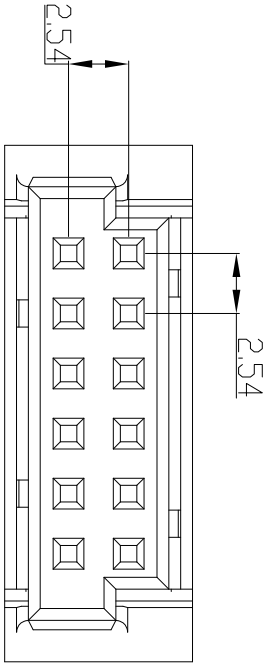

B

A

UNLESS OTHERWISE SPECIFIED				SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES= ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRW PER MIL-DTL-31000; LEGENDS: △ =FLAG NOTE CALL OUT REFERENCE ONLY				MATERIAL SPEC.		上海良速电子有限公司 Powermax 12pin dual row Female connector U				
				SEE NOTES 2						
				PROCESS SPEC.						
				--						
				THIRD ANGLE PROJECTION						
				APPROVALS		DATE				
				PREPARED BY JUSTIN LI		2020/5/6				
				ENGINEER IN CHARGE TYLER QIU						
				DESIGN MANAGER TYLER QIU						
				DESIGN ACTIVITY GROUP						
				THIRD ANGLE PROJECTION						
SCALE:				REF.		SHEET		1 OF 1		