

4






3

2

GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	First release	2020-05-06

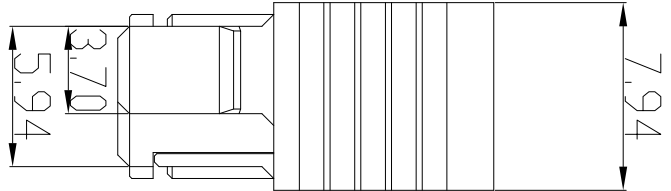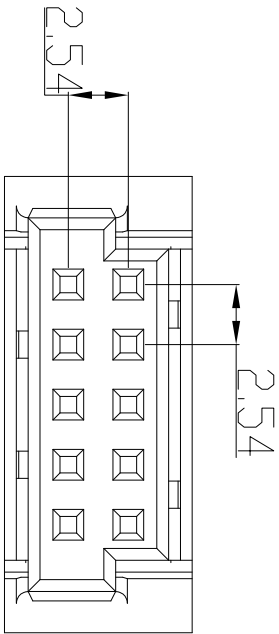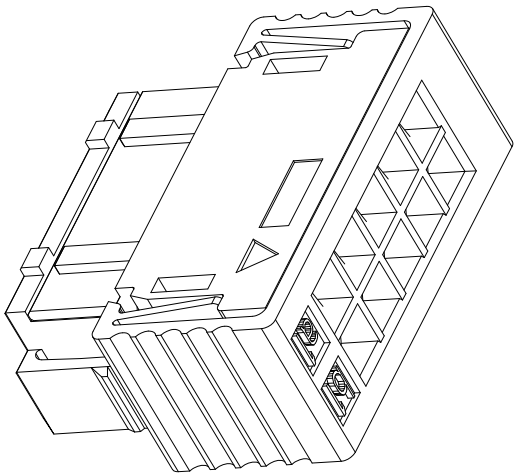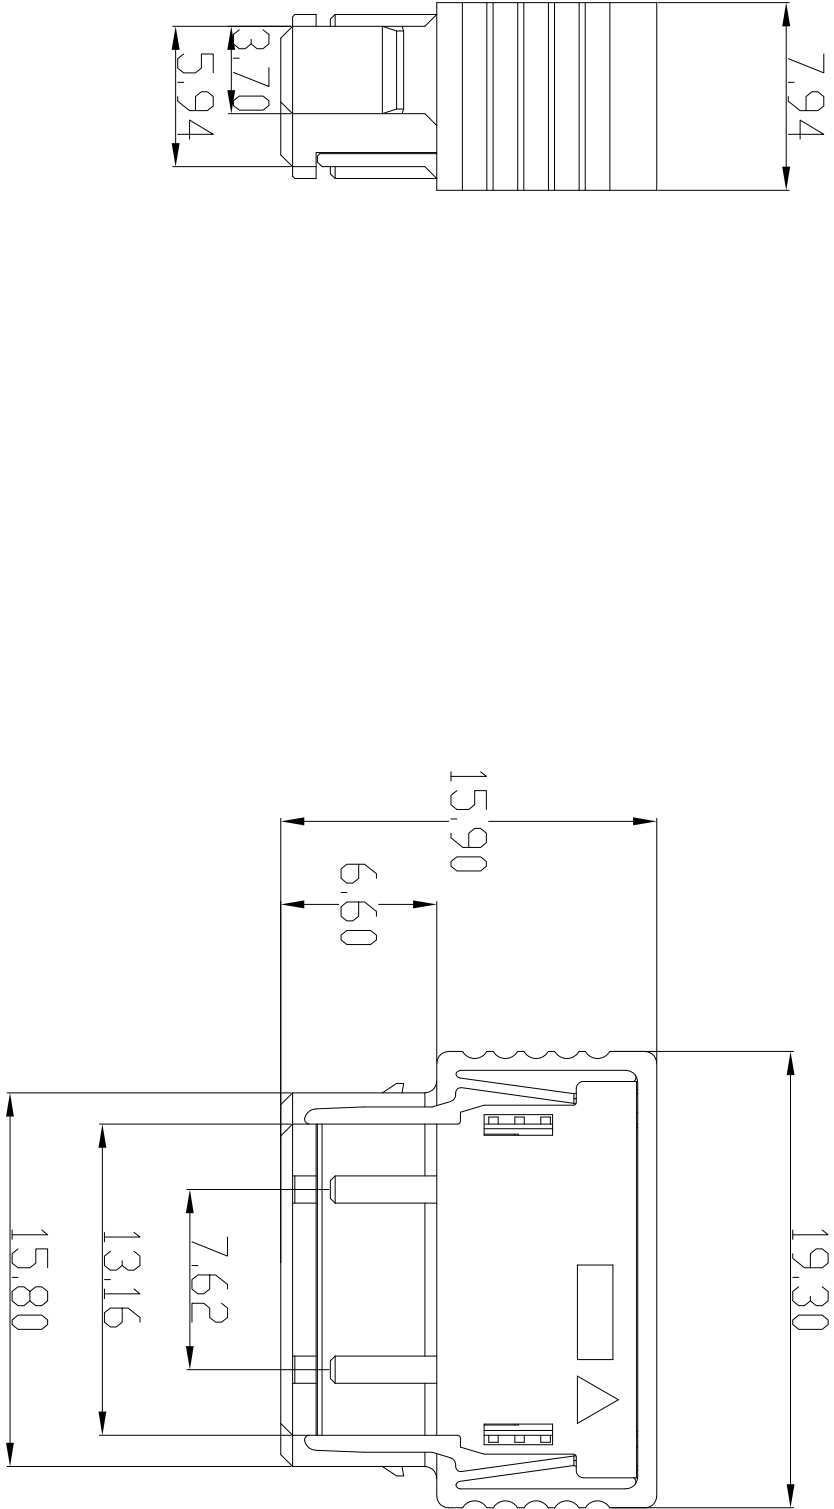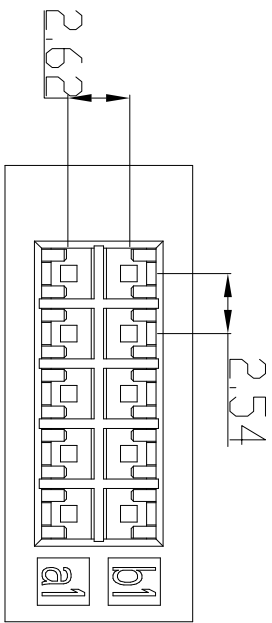

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC: PA THERMOPLASTIC,UL94 V-0,BLACK COLOR..

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000;		MATERIAL SPEC.		APPROVALS		DATE	上海良速电子有限公司 Powermax 10pin dual row Female connector U	
		SEE NOTES 2		PREPARED BY JUSTIN LI				
				ENGINEER IN CHARGE TYLER QIU		2020/5/6		
				DESIGN MANAGER TYLER QIU				
		PROCESS SPEC.		DESIGN ACTIVITY GROUP				
		--		THIRD ANGLE PROJECTION				
LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY								
				SCALE:				
				SIZE		DOCUMENT NO.	REF.	SHEET 1 OF 1
				C		PM-FS10201		A