
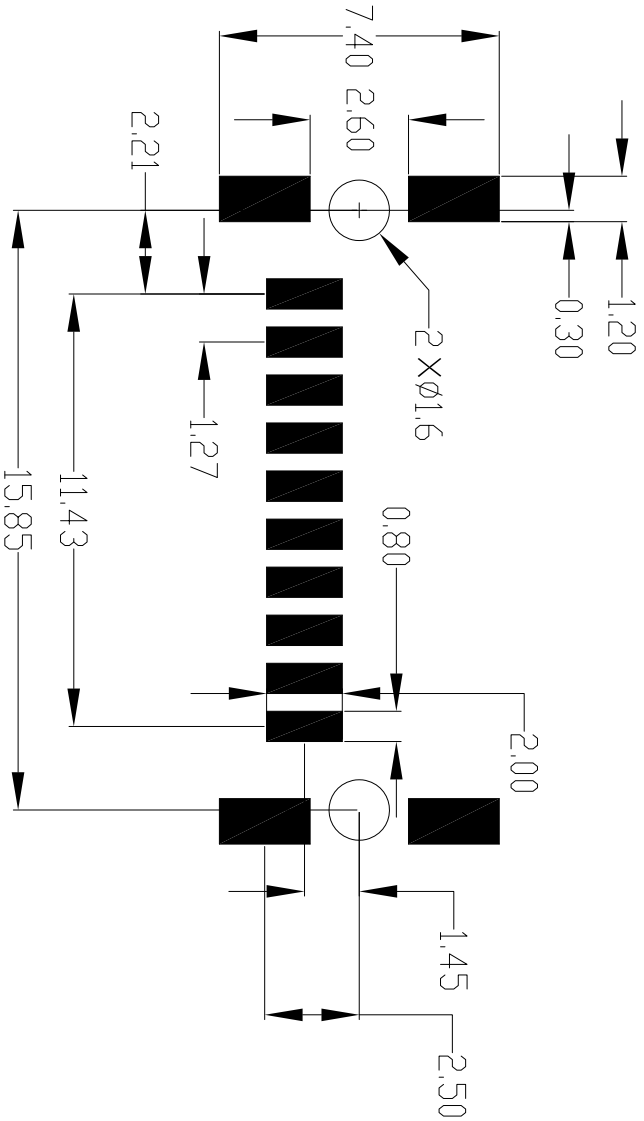
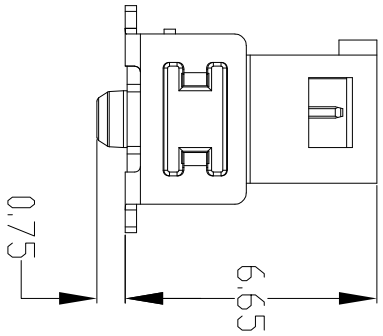


4

3

2




GENERAL TOLERANCE							
DIM. RANGE	0.5 ~ 3	> 3 ~ 6	> 6 ~ 30	> 30 ~ 120	> 120 ~ 400	SURFACE FINISH	
TOLERANCE	±0.1	±0.1	±0.2	±0.3	±0.5	1.6	

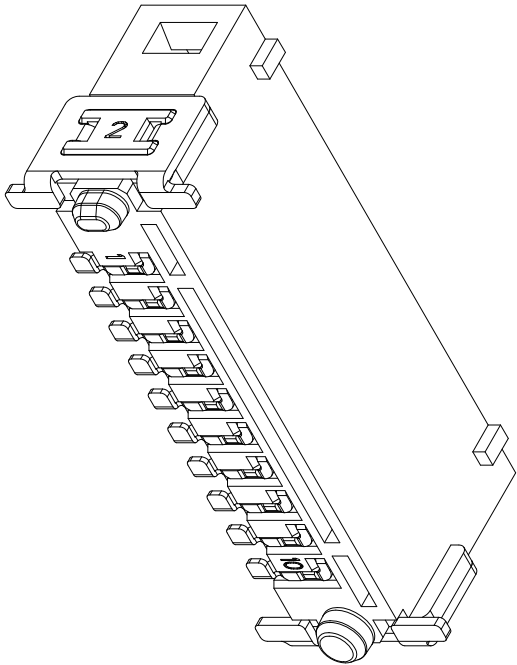

RECOMMENDED PCB-LAYOUT


CUSTOMER DRAWING

REVISIONS		
REV	DESCRIPTION	DATE
A	INITIAL RELEASE	2020-06-30

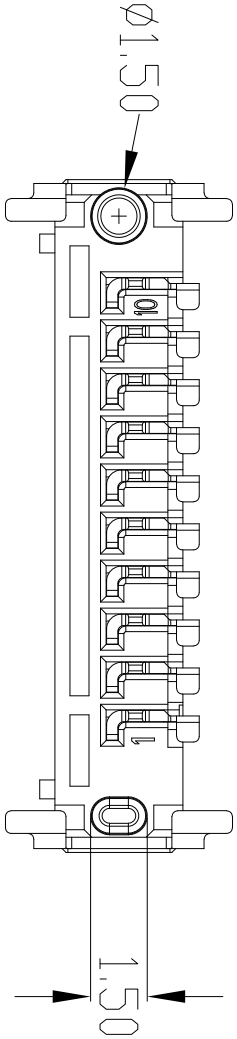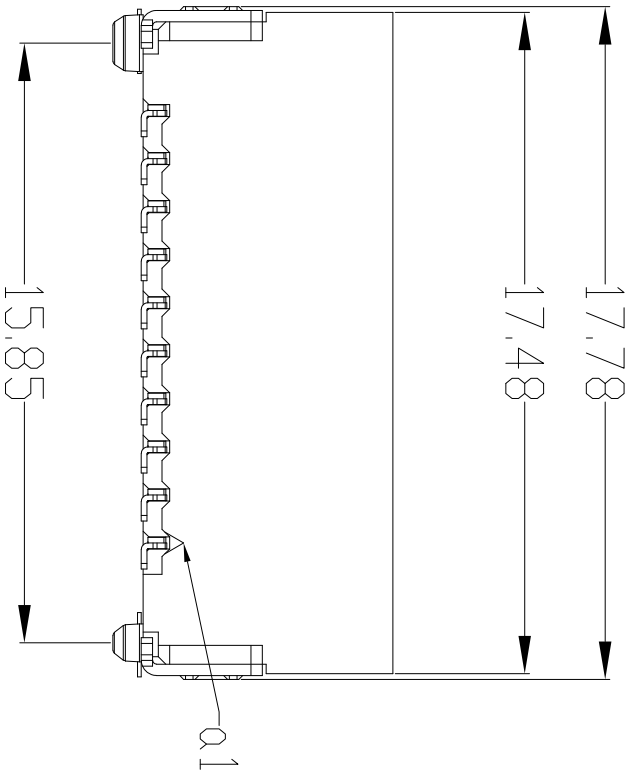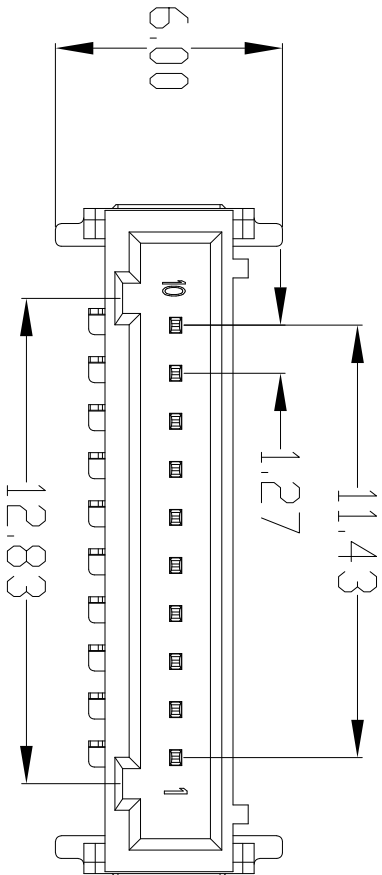

NOTES:

- THE PRODUCTS ARE ROHS COMPLIANCE.
- MATERIAL SPEC:
HOUSING: LCP THERMOPLASTIC, UL94 V-0, BLACK COLOR.
CONTACT: COPPER ALLOY, MATING AREA GOLD PLATING, OTHER AREA TIN PLATING.

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER		DESCRIPTION		NOTE
LINEAR DIMENSIONS ARE IN: MILLIMETERS TOLERANCES: ANGLES: ±2° DEFAULT LINEAR TOLERANCES SEE TABLE DIM. & TOL. PER ASME Y14.5M-1994; DRM PER MIL-DTL-31000; LEGENDS: =FLAG NOTE CALL OUT REFERENCE ONLY		MATERIAL SPEC.		APPROVALS		DATE		上海良速电子有限公司 Powerlite 1.27mm Single Row 10pin V Male SMT Connector U		
		SEE NOTES 2		PREPARED BY		JUSTIN LI				
				ENGINEER IN CHARGE		TYLER QIU				
				DESIGN MANAGER		TYLER QIU				
				DESIGN ACTIVITY GROUP		Jun-30-20				
PROCESS SPEC.		THIRD ANGLE PROJECTION								
--										
		SIZE		DOCUMENT NO		PL-MV10101		REV		A
		SCALE:		REF.		SHEET 1 OF 1				

A

B

C

D

4

3

2

1